

Human Exploration Telerobotics 2 (HET2)

Astrobee



Delta Periodic Technical Review 3

February 1, 2017



Agenda

Time	Duration	Presenter	Topic
8:30	0:30	Terry, Chris	Welcome/Intro
9:00	1:30	Trey, Team Leads	Design
10:30	0:15		<i>Break</i>
10:45	1:15	Team Leads	Design
12:00	0:45		<i>Lunch</i>
12:45	0:30		<i>Demo</i>
13:15	1:15	Team Leads	Design
14:30	0:15		<i>Break</i>
14:45	0:30	Trey	Systems Engineering
15:15	0:30	Jonathan	Integration & Test
15:45	0:30	Ernie	Safety
16:15	0:15	Chris	Project Management
16:30	0:15	Maria	Operations
16:45	0:15	Chris	Conclusion



Welcome !

- Final design review of **Astrobee**
 - Delta Periodic technical review #3 (PTR 3)
- Logistics
 - Emergency exits
 - Rest rooms, lunch, demo
- (A few) introductions
 - **GCD / HET2 / Astrobee** key people
 - **HEOMD/SPHERES** (Crusan, Martinez, Benavides)
 - **PTR board** (Fong, Provencher, Smith, Barlow, Smith, Crusan, Benavides)



Periodic Technical Review

(HET2 Project Plan)

- Periodic Technical Review (PTR)
 - Monitor and communicate technical and programmatic progress against the approved baseline
 - Review plans for upcoming work
- The **PTR board** consists of (or an assigned delegate):
 - HET2 PM: Terry Fong
 - Astrobee management: Chris Provencher, Trey Smith, Jonathan Barlow, Ernie Smith
 - AES Director/SPHERES PM: Jason Crusan, Jose Benavides
- All stakeholders who contribute or are interested in the project are invited to participate



Delta PTR 3

- Demonstrate that the design has sufficiently matured and has an acceptable level of risk
 - Hardware expected to be more mature (with known design gaps)
 - Software maturity expected to follow, with planned design beyond PTR 3
- Examine the results of Prototype testing (and any impact on the Certification Unit).
- Today's objectives :
 - **Focus on new/changed design since PTR 3 (June 2016)**
 - Ensure a thorough review of the products identified for PTR 3
 - Ensure Prototype 4D activities to date do not adversely impact forward plans
 - Ensure issues raised during the review are appropriately documented and a plan for resolution is prepared
- Following \triangle PTR 3, Astrobee will:
 - Complete design for flight (any open items)
 - Complete Prototype 4D testing
 - Proceed with Certification Unit procurements



PTR 3 Entrance Criteria

- ✓ The element has successfully completed the previous planned milestone reviews, and responses have been made to all issues and actions, or a timely closure plan exists for those remaining open.
- ✓ The PTR 3 agenda, success criteria, and instructions to the review board have been agreed to by the technical team, element lead, and review chair prior to the review.
- ✓ The PTR 3 data package (IRG-FFRP-003) with the following products are available to the participants:
 - ✓ IRG-FF017 Astrobee Design Document with a design overview (to subsystem level) that can be shown to meet requirements and key technical performance measures
 - ✓ Astrobee document tree
 - ✓ Technical resource margins
 - ✓ Updated PTR 3 technical products
 - ✓ Updated schedule, cost, and risks



PTR Board + Reviewers

- We want your feedback !
 - Identify what we are doing well + what we can do better
 - Identify new issues or concerns
 - Suggest improvements
 - Recommend how and when Astrobee should move into the next lifecycle phase
- Please keep in mind...
 - Astrobee is an **element** within the HET2 **project**
 - PTR objectives
 - Astrobee is 7120.8 (Research & Technology) with ISS certs
 - Astrobee is **not** a spaceflight project




Overview

- Develop, test, deliver 2 free flying robots for ISS IVA use
- 4 year project (FY15-FY17) under Human Exploration Telerobotics 2 (HET2)
- Sponsor: Space Technology Mission Directorate, Game Changing Development Program
- Technology infusion to ISS payloads & operations





Astrobee Organization

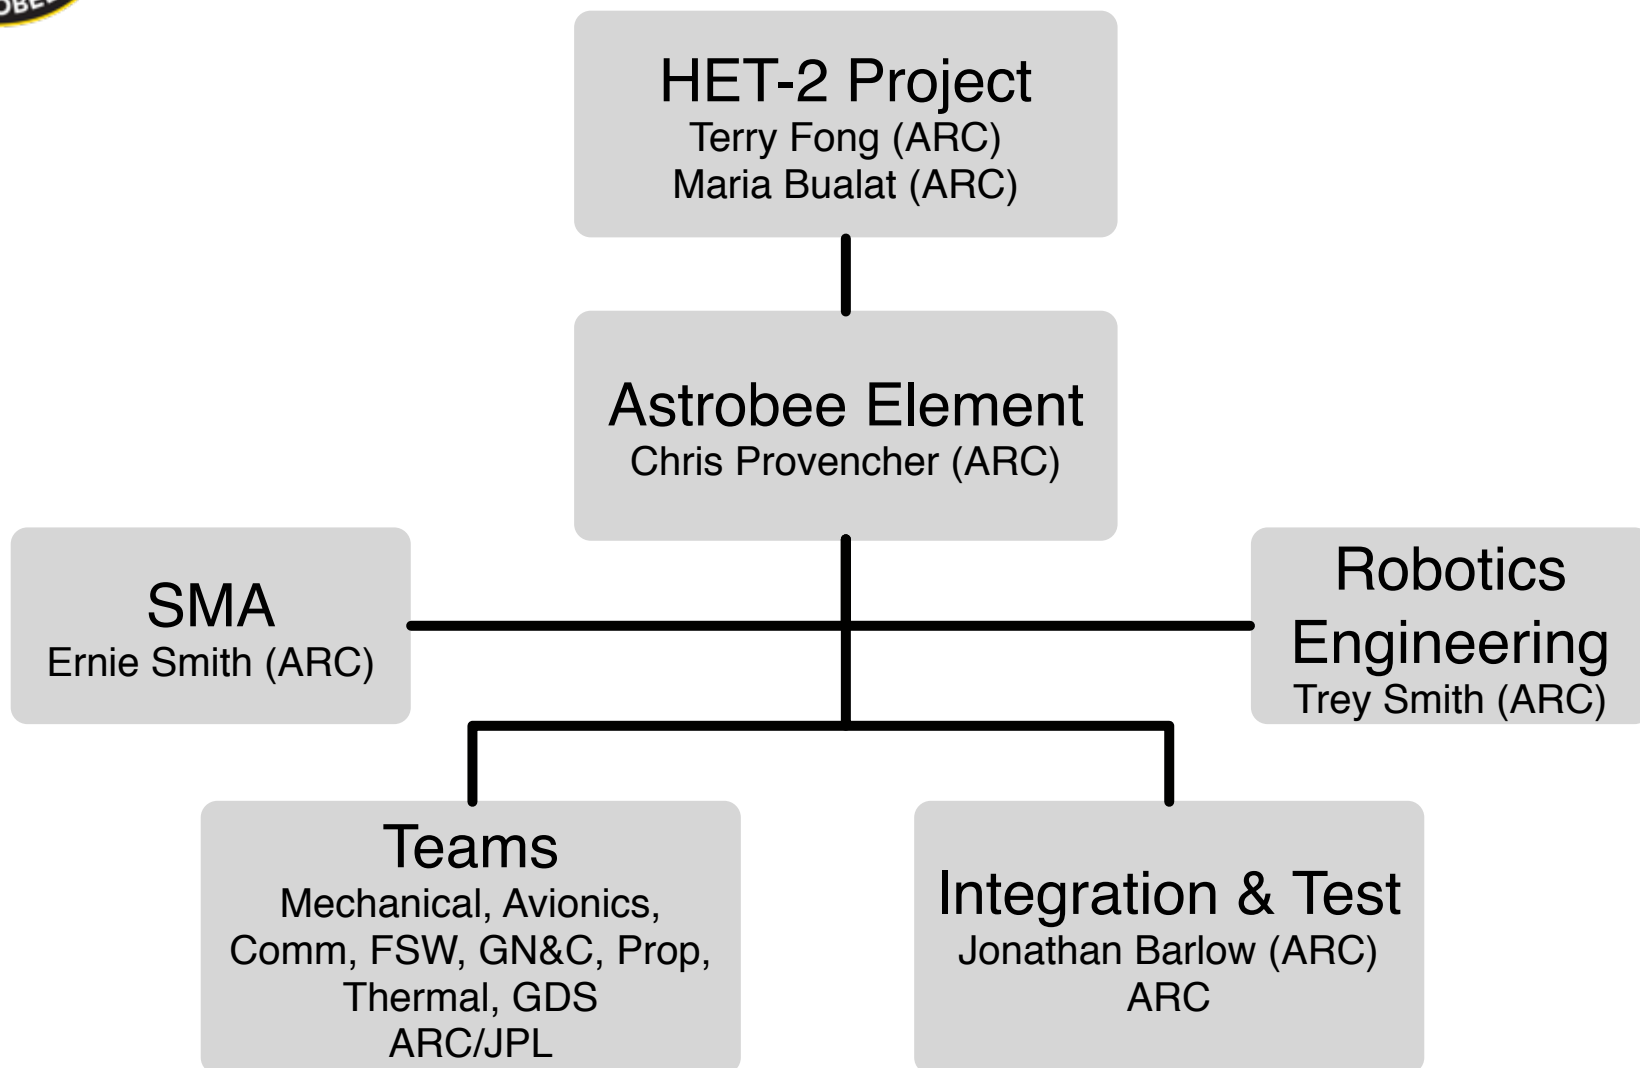



Systems Engineering Team

- Trey Smith (ARC-TI, Lead)
- Jonathan Barlow (ARC-TI)
- Maria Bualat (ARC-TI)
- Estrellina Pacis (ARC-TI)
- Hugo Sanchez (ARC-RE)
- Allison Zuniga (ARC-TI, alumna)



I&T Team

- Jonathan Barlow (ARC-TI, Lead)
- Max Feinberg (Univ. of Illinois, OSSl intern)
- John Love (ARC-RD)
- Corey Snyder (ARC-SCF)
- Olivia Formoso (ARC-RE, alumna)



Avionics Team

C&DH, EPS, Dock, Perching Arm, Propulsion

- Vinh To (ARC-TI, Lead)
- Dmitriy Arbitman (Univ. of California San Diego, intern, alumnus)
- Steve Battazzo (ARC-RE)
- Jon Dewald (ARC-RE, alumnus)
- Brandon Gigous (Univ. of Illinois, OSSI intern, alumnus)
- Jason Lum (ARC-TI, alumnus)
- Nghia Mai (ARC-RE)
- In Won Park (ARC-TI)
- Cedric Priscal (ARC-TI)
- Jongwoon Yoo (ARC-TI)
- Shang Wu (ARC-RE)



Communications Team

Free Flyer Comm, E2E comm standards

- Ted Morse (ARC-TI, Lead)
- Vinh To (ARC-TI)
- Jason Lum (ARC-TI, alumnus)



Flight Software Team

Flight software, GNC software

- Lorenzo Flückiger (ARC-TI, Lead)
- Oleg Alexandrov (alumnus)
- Katie Browne (ARC-TI)
- Brian Coltin (ARC-TI)
- Phil Cooksey (Carnegie Mellon Univ., OSSl intern)
- Ravi Gogna (ARC-TI, alumnus)
- Dong-Hyun Lee (ARC-TI)
- Zack Moratto (ARC-TI, alumnus)
- Ted Morse (ARC-TI)
- Andrew Symington (ARC-TI)
- Mike Watterson (Univ. of Pennsylvania, NSTRF intern)



Ground Data Systems Team

- DW Wheeler (ARC-TI, Lead)
- Maria Bualat (ARC-TI)
- Ryan Goetz (JPL-397J)
- Connor Hitt (Univ. of Texas, intern, alumnus)
- Jessica Marquez (ARC-TH, collaborator)
- Andy Martinez (ARC-TI, Education Associates intern, alumnus)
- Jay Torres (JPL-397G, alumnus)



GN&C Team

GNC software, Prop software

- Jesse Fusco (ARC-RE, Lead)
- Michael McIntyre (ARC-RE, alumnus)
- Robert Nakamura (ARC-RE)



Mechanical Team

Structure, Propulsion, Dock, Perching Arm

- Hugo Sanchez (ARC-RE, Lead)
- Jeff Blair (ARC-RE)
- Earl Daley (ARC-RE)
- Brian Koss (ARC-RE, alumnus)
- Alex Langford (ARC-RE, alumna)
- Alberto Makino (ARC-RE)
- Travis Mendoza (Univ. of Southern California, intern, alumnus)
- Mike McIntyre (ARC-RE)
- Blair McLachlan (ARC-AOX)
- In Won Park (ARC-TI)
- Troy Shilt (Ohio State Univ., OSSl intern)
- Rafael “Omar” Talavera (ARC-RE)
- Watson Attai (ARC-RE)



Thermal Team

Free Flyer, Dock

- Jeffrey Feller (ARC-RE, Lead, alum)
- John Love (ARC-RD, Lead)
- Earl Daley (ARC-RE)
- Ali Kashani (ARC-RE)
- Blair Mclachlan (ARC-AOX)
- Vinh To (ARC-TI)



Human-Robot Interaction Team

Free Flyer, Control Station

- Yunkyung Kim (ARC-TI, Lead)
- Liz Cha (Univ. of Southern California, NSTRF intern)
- Terry Fong (ARC-TI)
- Hyunjung Kim (ARC-TI, alumna)
- Pem Lasota (MIT, NSTRF intern)
- Youngwoo Park (ARC-TI, alumnus)
- Dan Szafir (U-Wisc, NSTRF intern, alumnus)




0g Robotics Research Facility



AES, SPHERES Program, Researchers




Mobile Camera Tasks

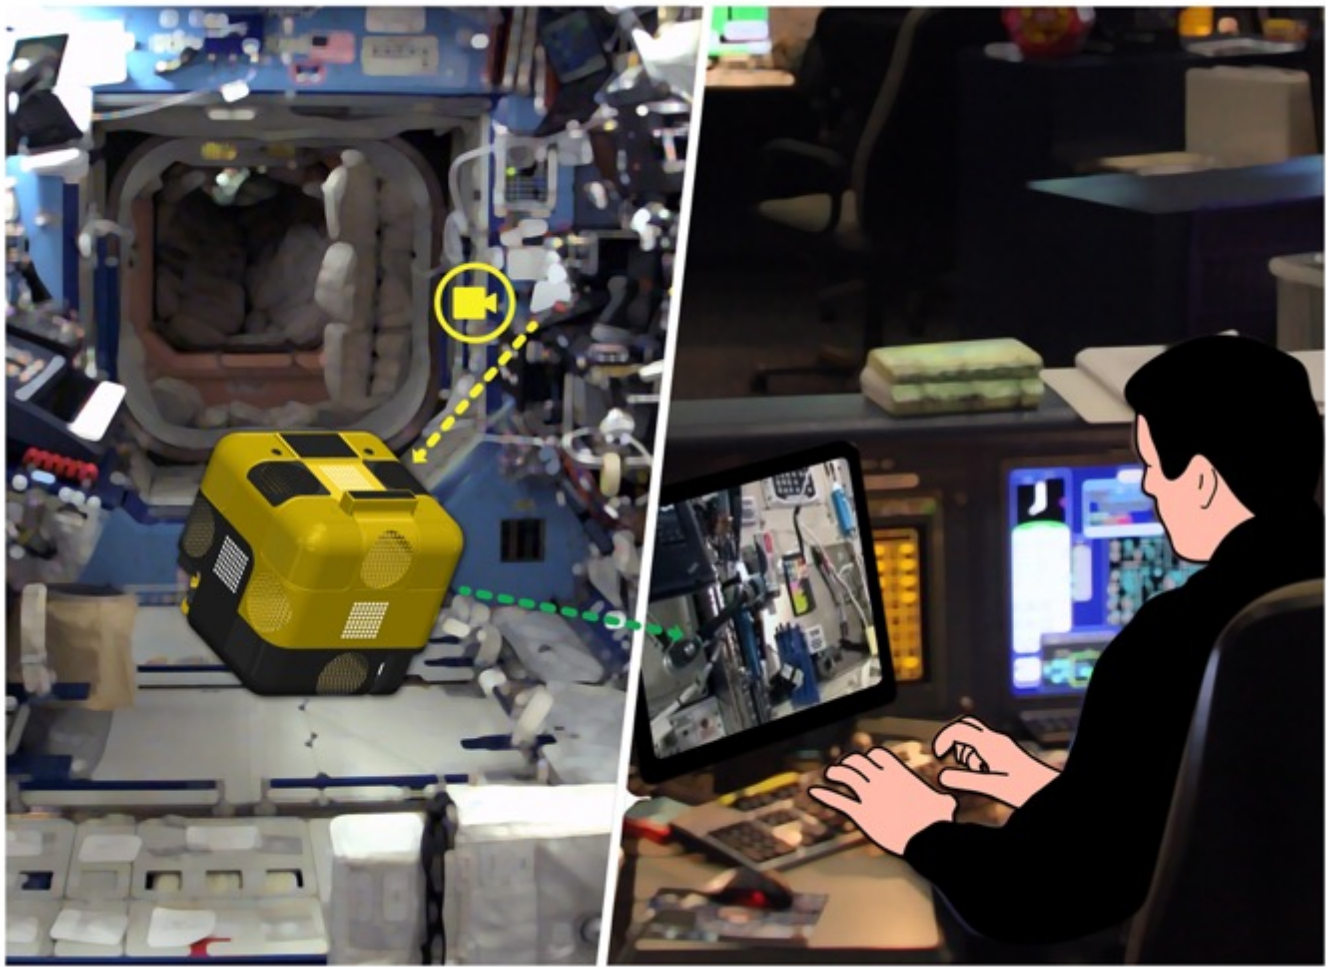

ISS Program, FOD, POIC




Mobile Sensor Tasks

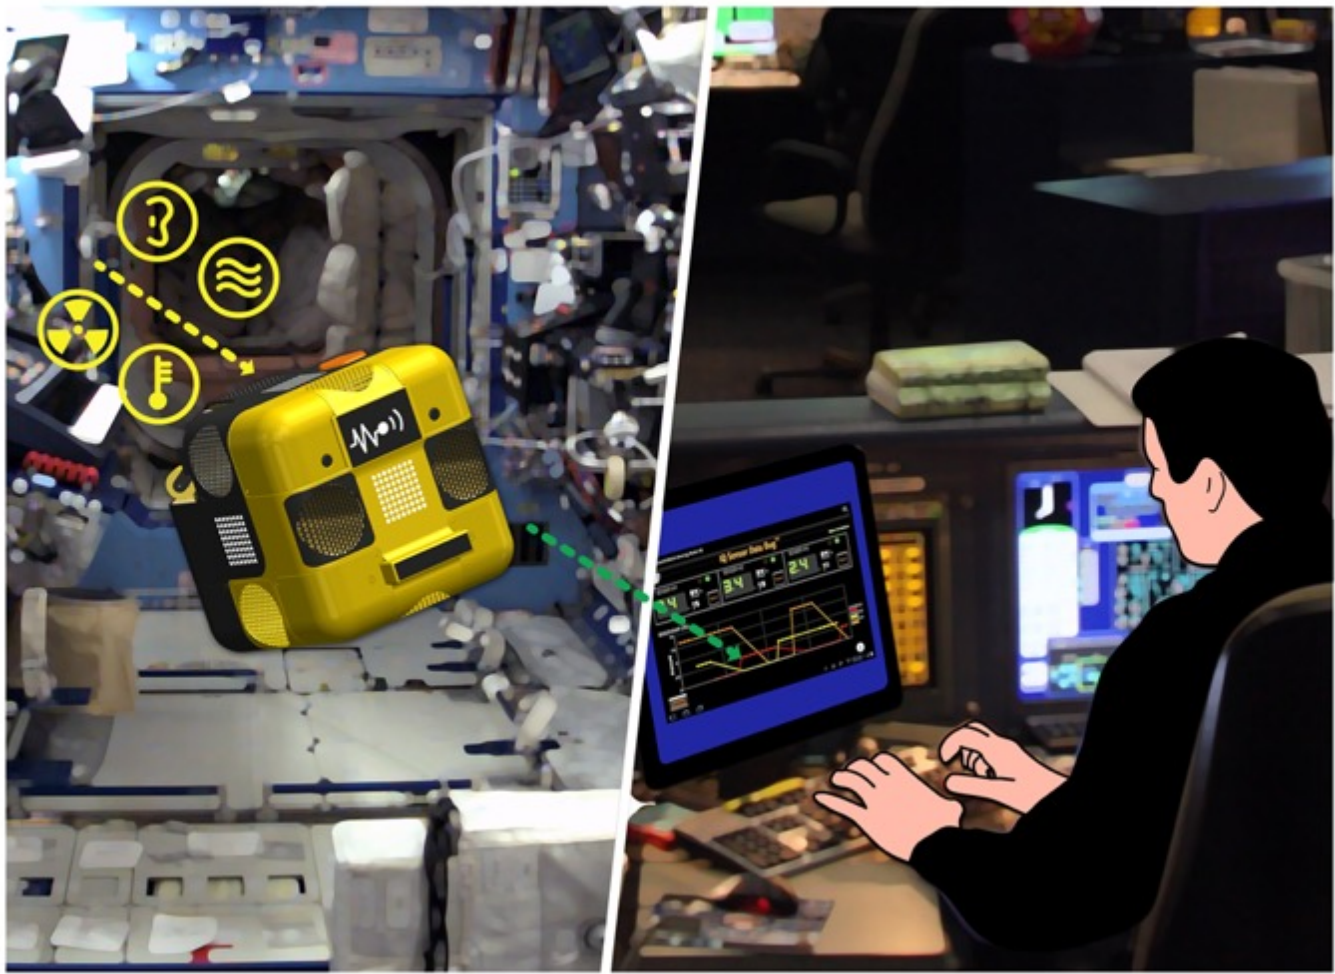

ISS Program, FOD, POIC



Dock & Resupply

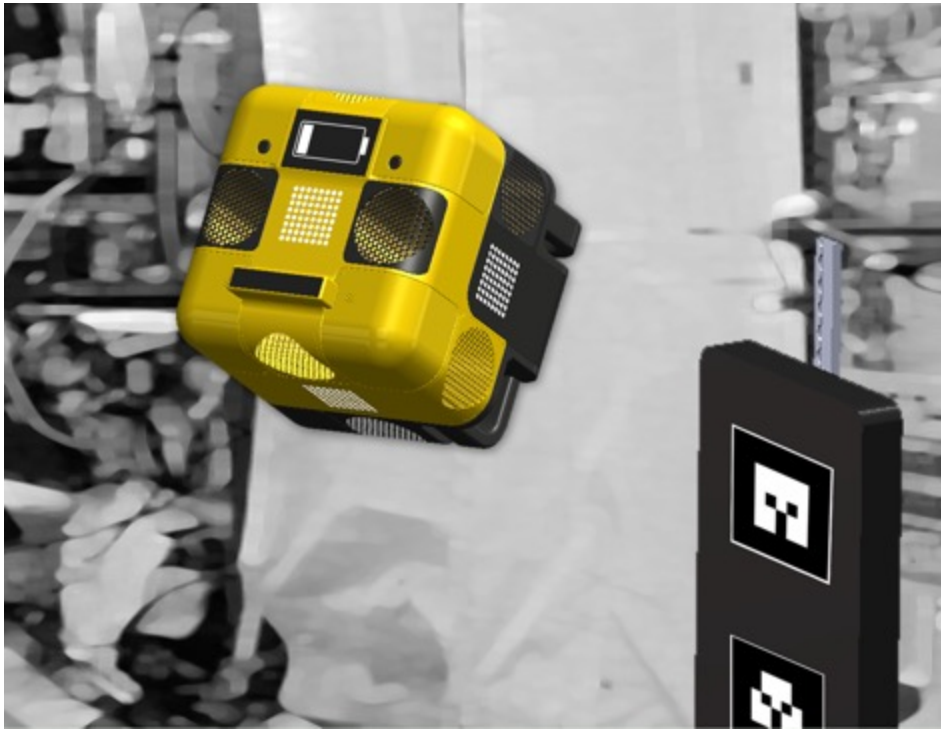



Agenda

Time	Duration	Presenter	Topic
8:30	0:30	Terry, Chris	Welcome/Intro
9:00	1:30	Trey, Team Leads	Design
10:30	0:15		<i>Break</i>
10:45	1:15	Team Leads	Design
12:00	0:45		<i>Lunch</i>
12:45	0:30		<i>Demo</i>
13:15	1:15	Team Leads	Design
14:30	0:15		<i>Break</i>
14:45	0:30	Trey	Systems Engineering
15:15	0:30	Jonathan	Integration & Test
15:45	0:30	Ernie	Safety
16:15	0:15	Chris	Project Management
16:30	0:15	Maria	Operations
16:45	0:15	Chris	Conclusion

Backup





SPHERES Payloads





Testbed Capabilities

- Multiple free flyer operations
- Mobile sensing & manipulation tasks
- Holonomic motion
- Remote control
- Host payloads with physical and software interface
- Not reverse compatible with existing SPHERES payloads (without an adaptor)



Free Flyer Key Requirements

- Holonomic control
- Navigate USOS
- Multiple peripheral ports
- Reconfigure parameters per payload
- Open API for payloads
- Position: +/- 20 cm, +/- 2 cm
- Angle: +/- 20 deg, +/- 8 deg
- Max acceleration: 10 cm/sec²
- Max velocity: 50 cm/sec
- Avoid hitting unexpected obstacles
- Avoid keep out zones
- Validate path against map
- Monitor battery charge
- Noise requirements
- Tolerate collisions
- Size: 12" x 12" x 12"
- Mass: 8 kg
- Stream and record HD video
- Sortie durations & energy storage
- Perch on handrails
- Autonomous docking
- Replaceable modules
- Upgradeable software
- ISS ICD & Safety

Presented and baselined at PTR1



Ground Data Systems

Key Requirements

- Ground Control
- Manual Control
- Plan authoring
- Plan control (select, upload, run, pause, abort, skip)
- Provide Pls access to science data
- Software install (guest science)
- Monitor multiple robots
- Identify free flyer being controlled
- Remote Terminate
- Real-time telemetry display
- 2D and/or 3D telemetry visualization
- Simulation for plan visualization
- Control station health & status
- Provide data storage
- Minimal UI training for Crew and Operatory Stations
- Upgradable hardware/software
- ISS ICD

Presented and baselined at PTR1



Dock Key Requirements

- Free flyer and dock must be able to complete all physical connections without crew assistance
 - AR target to assist free flyer localization during dock approach
- ~~Recharge spare batteries~~
- Provide free flyer with high bandwidth wired connection to ISS LAN
- Dock provides two free flyer berths
- ISS ICD & Safety

System Design Overview




Delta Periodic Technical Review 3

February 1, 2017




Astrobee Elements

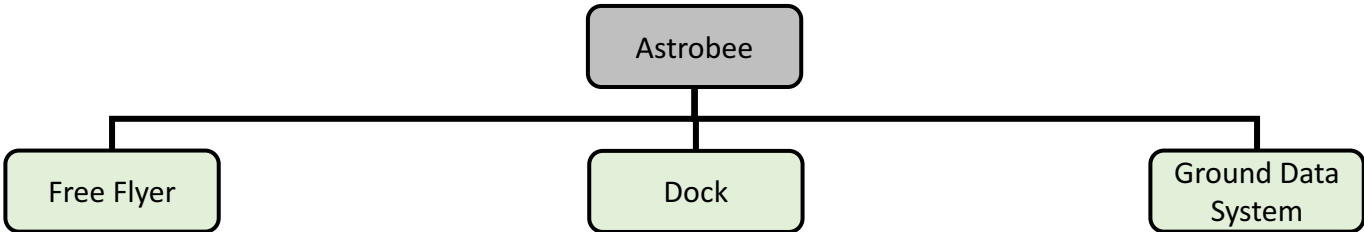



System Data Flow Diagram

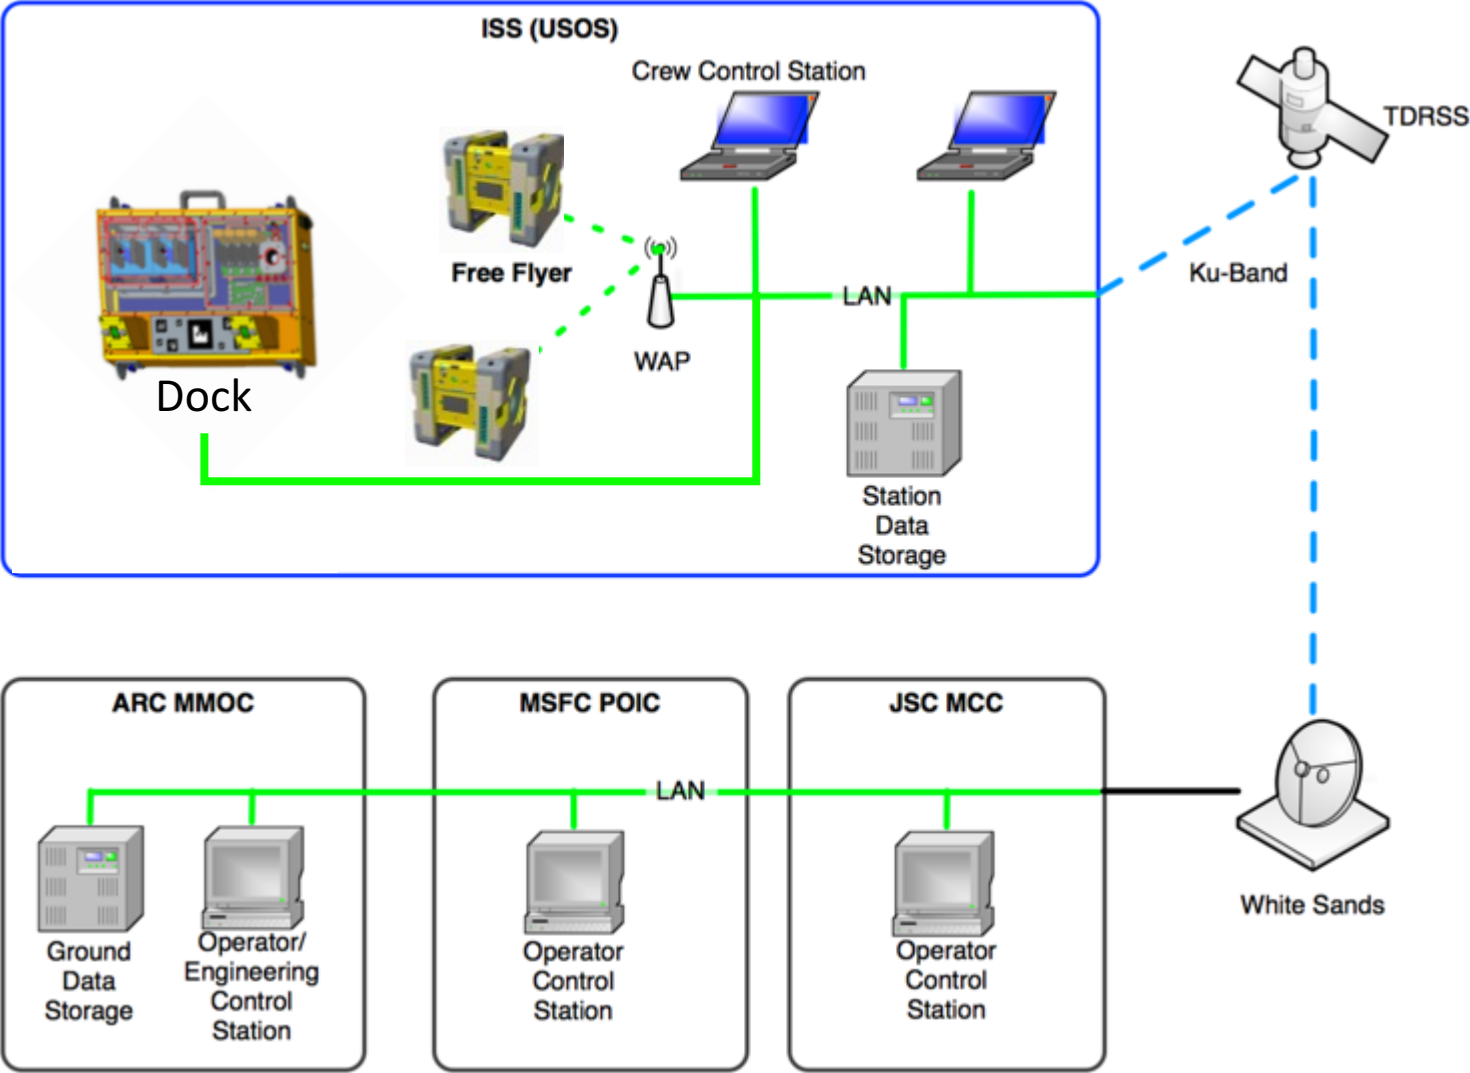




Subsystems

L1


L2

L3

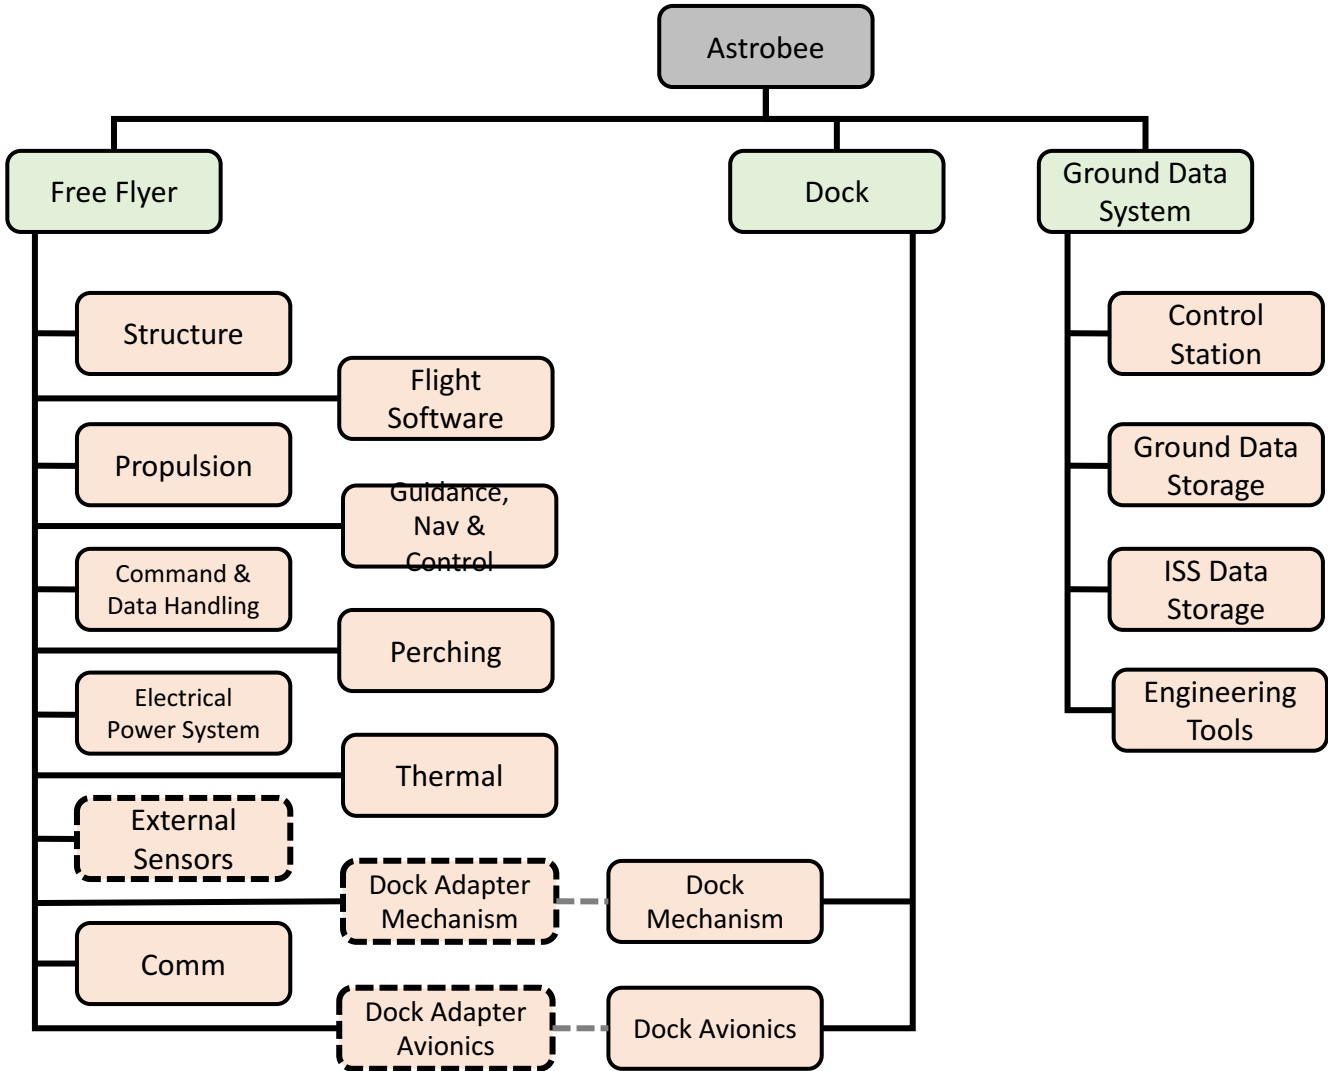



Current Robot Design

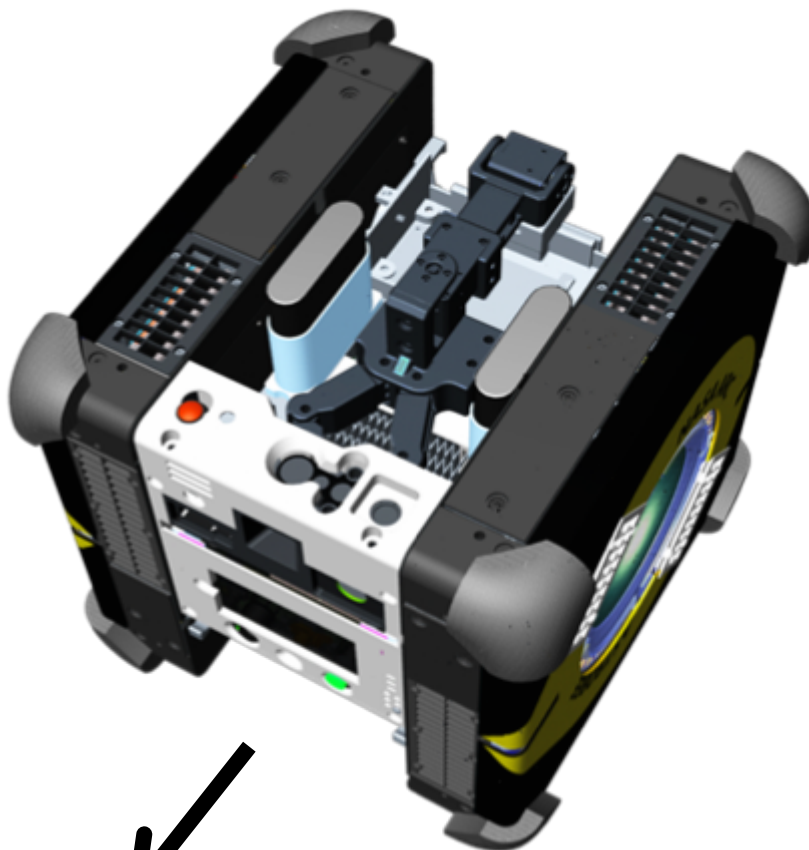


FORWARD

12.5 x 12.5 x 12.5 inches
8 kg mass target



Current Robot Design

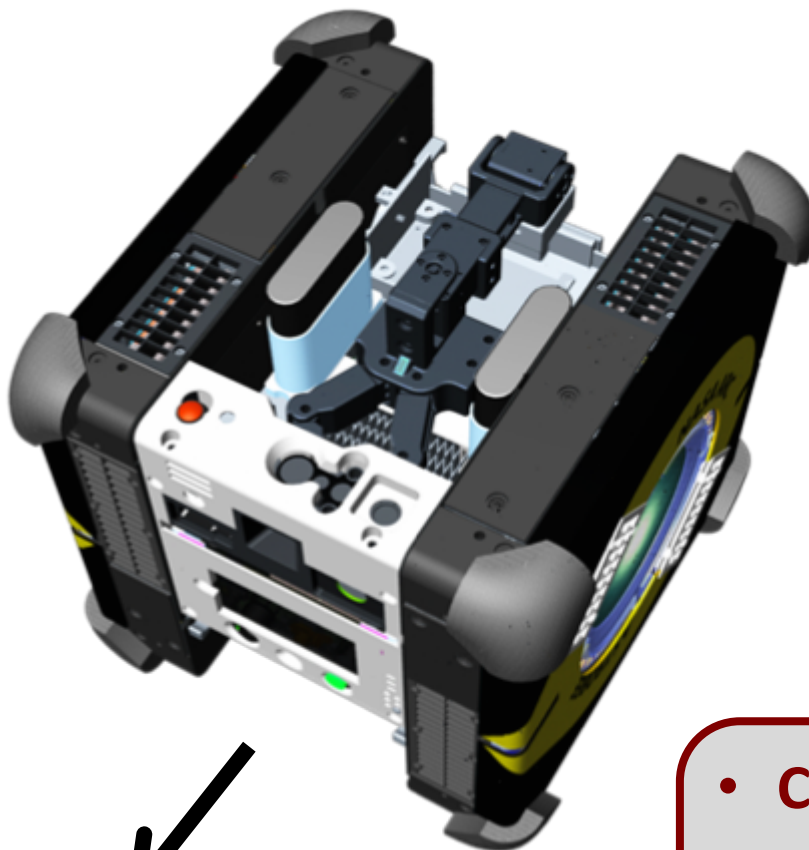

FORWARD

12.5 x 12.5 x 12.5 inches
8 kg mass target

- **Current best estimate of flight mass is 8.7 kg, above TPM threshold**
- **Will discuss this in detail later**




Project Response to PTR3 Feedback

- Many design gaps and risks were identified at PTR3
- We judged the risk was too high to immediately proceed from Prototype 4C (“P4C”) to cert unit build
- Therefore, do one more round of prototype testing prior to cert unit
 - Integrated P4D – Incorporates many of the post-PTR3 design changes
 - Stand-alone prototyping of some components – Used to save resources when we could retire the risk without integrated testing




Robot Prototype Versions


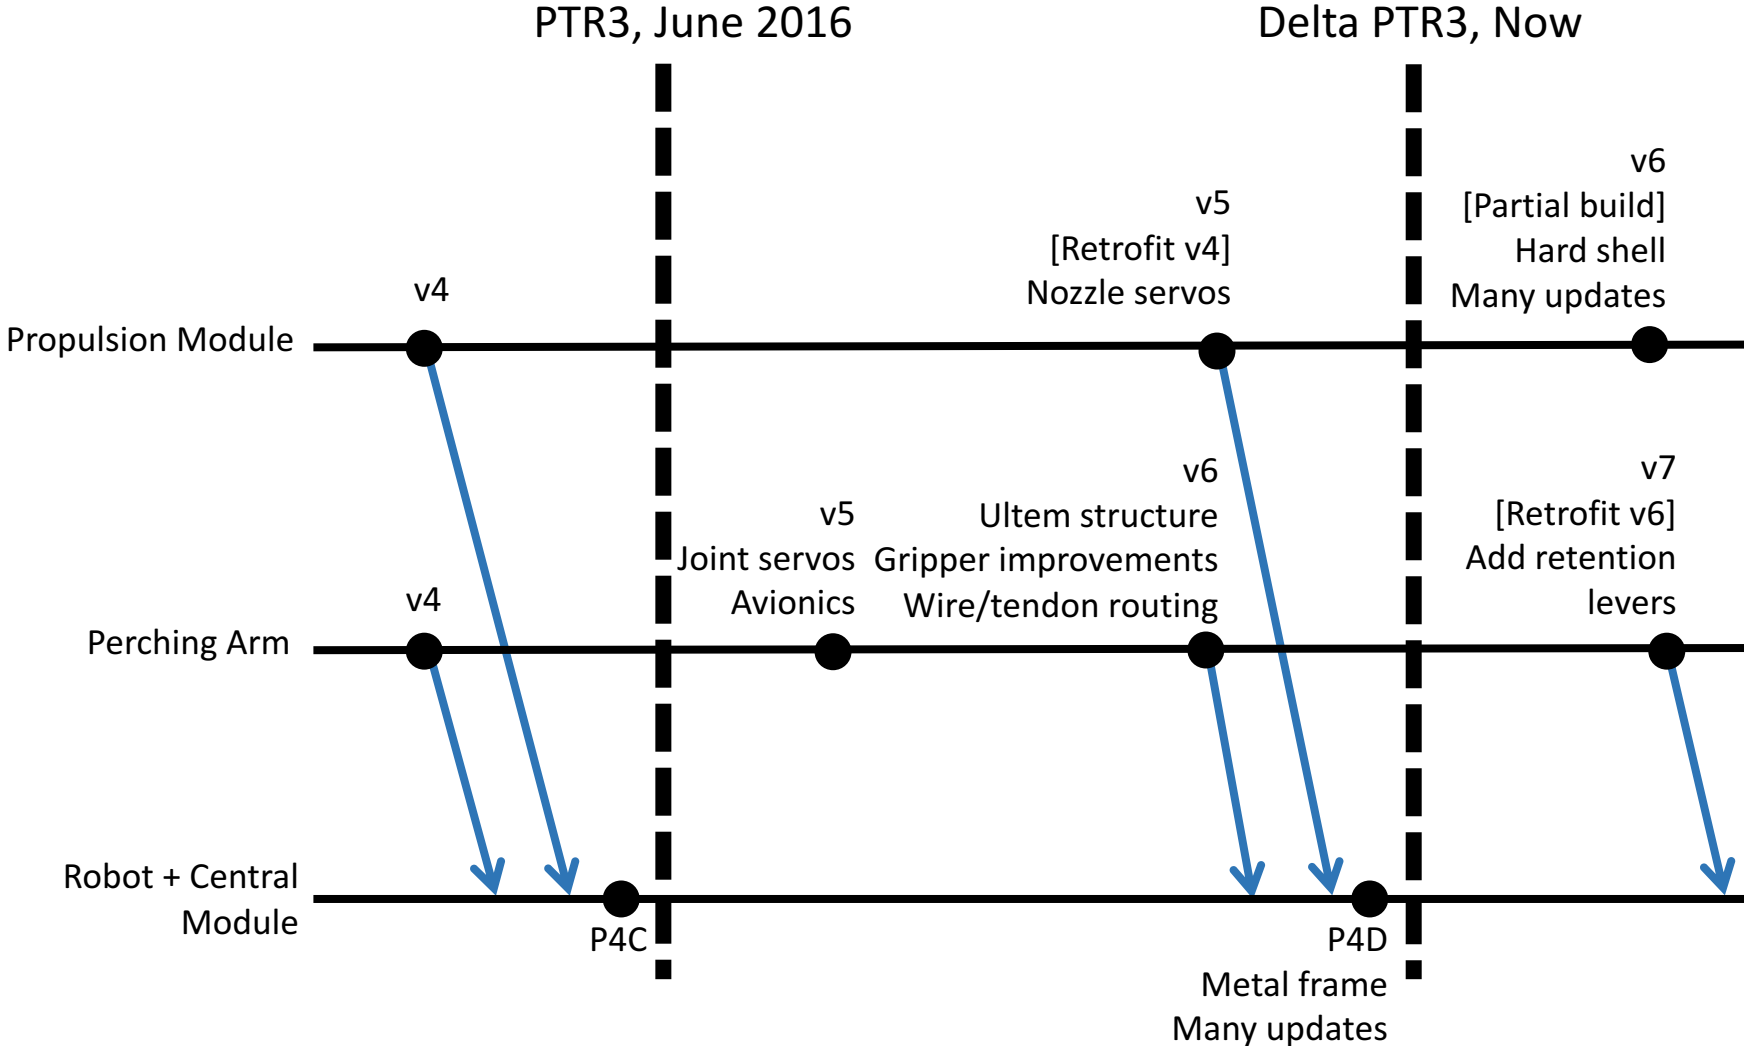




Propulsion Module Versions

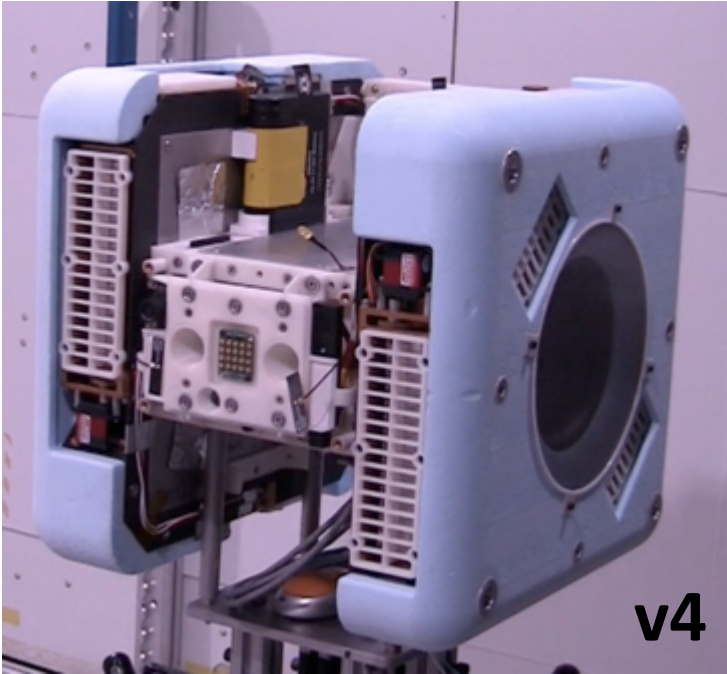


v4

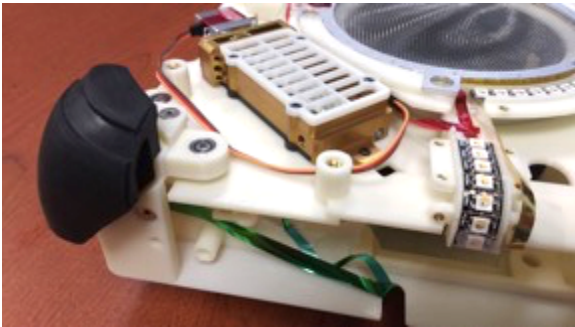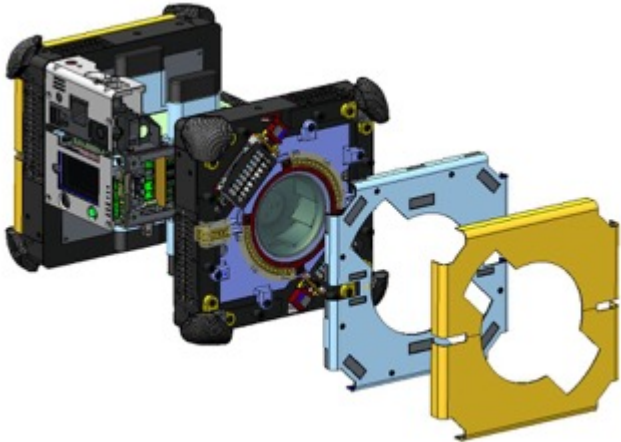

v5

[Retrofit v4]
Nozzle servos

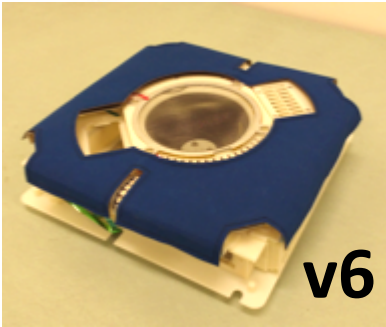

v6


[Partial build]
Hard shell
Many updates

Propulsion Module







Perching Arm Versions

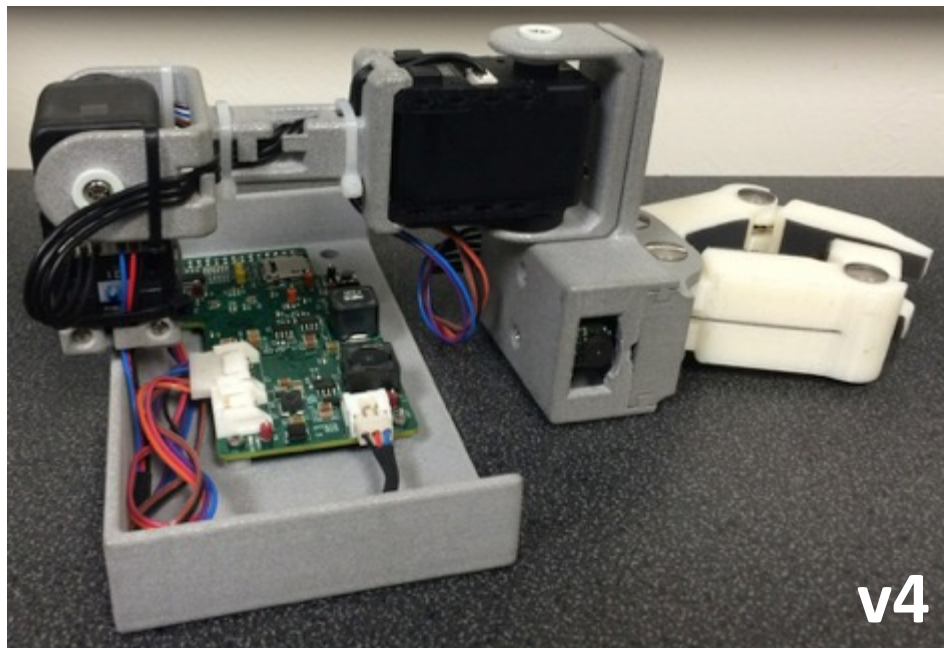

v4

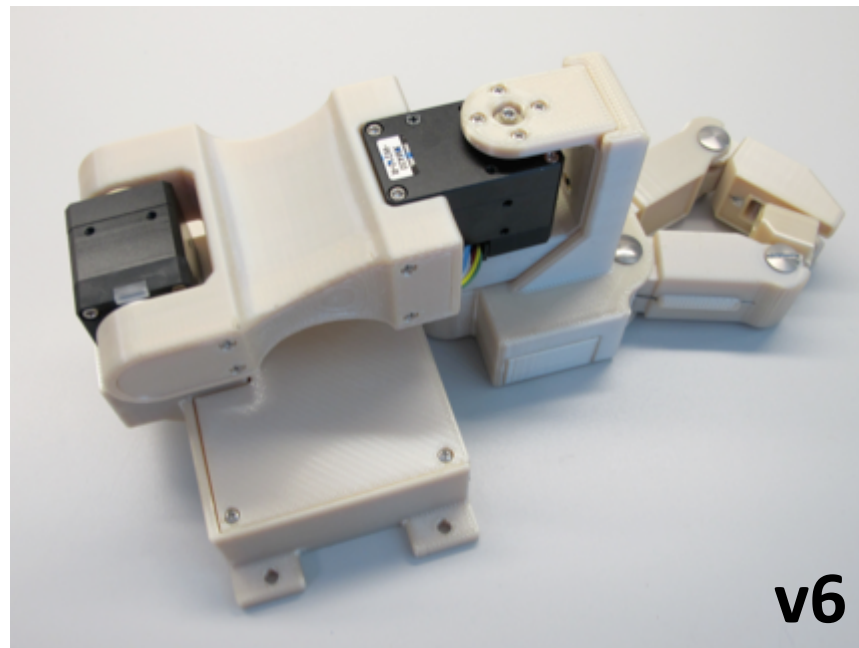


v6

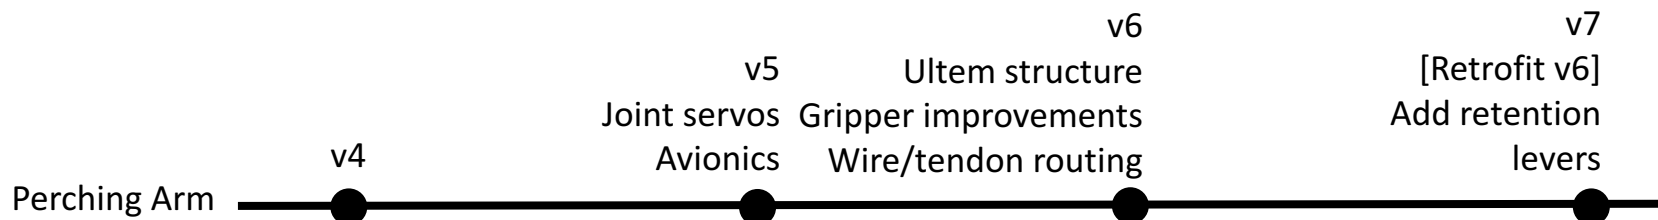




Robot / Central Module Versions

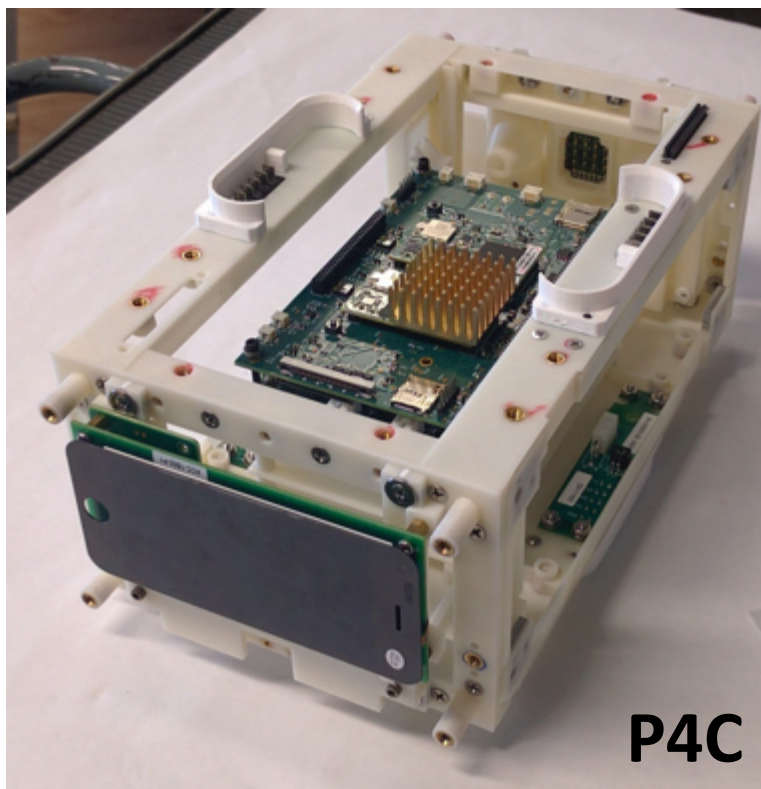

P4C

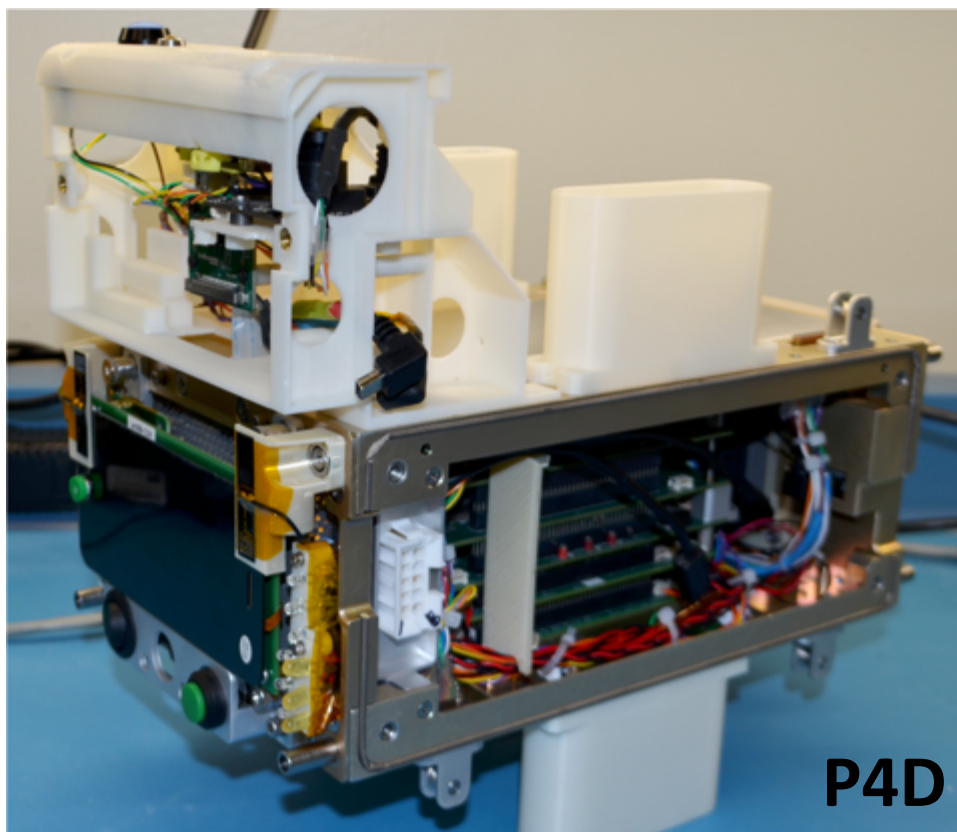

P4D

Robot + Central
Module

P4C

P4D


Metal frame
Many updates



Human-Robot Interaction




- External appearance design
- Signal light design
- Human factors throughout (e.g. restraining straps)

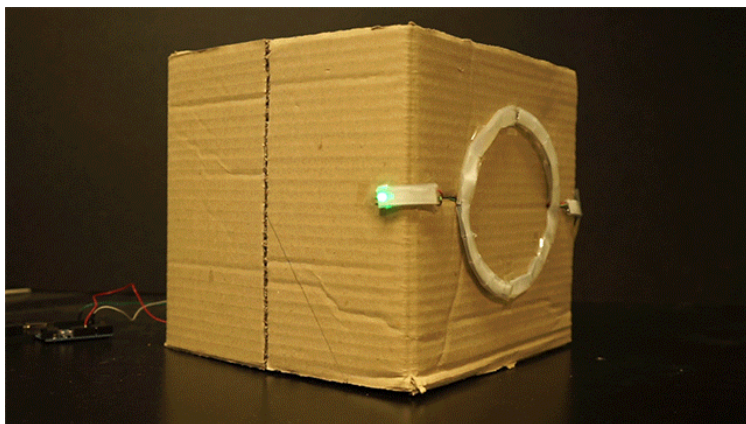




Structure

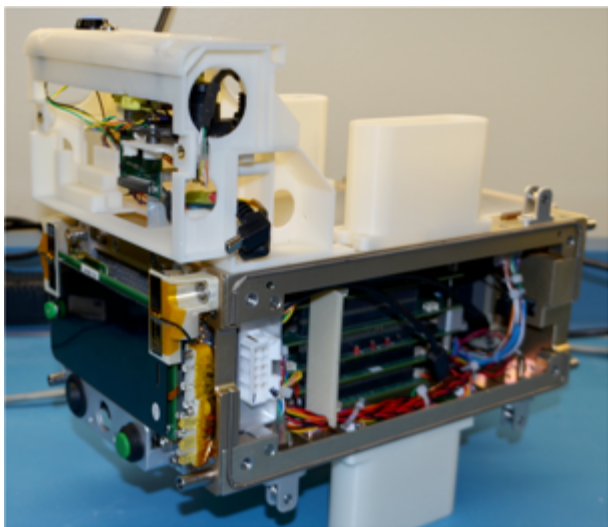


- Camera placement, servicing, lens protection
- Payload interface
- Wire routing and thermal air flow

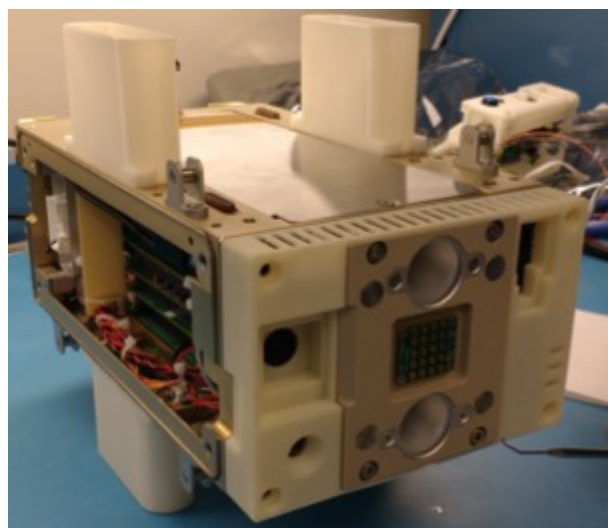




Propulsion

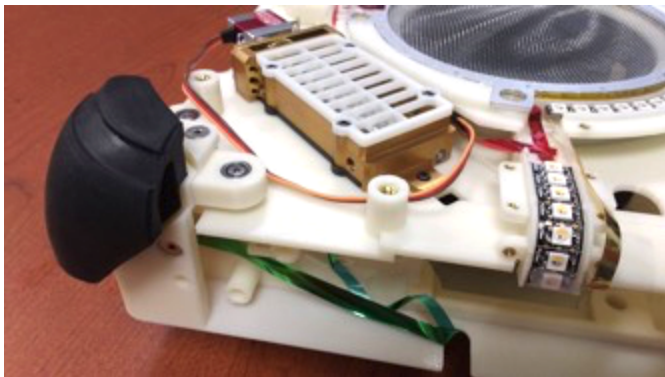


- Plenum lid / hard shell
- Corner bumpers
- Soft layer and skin

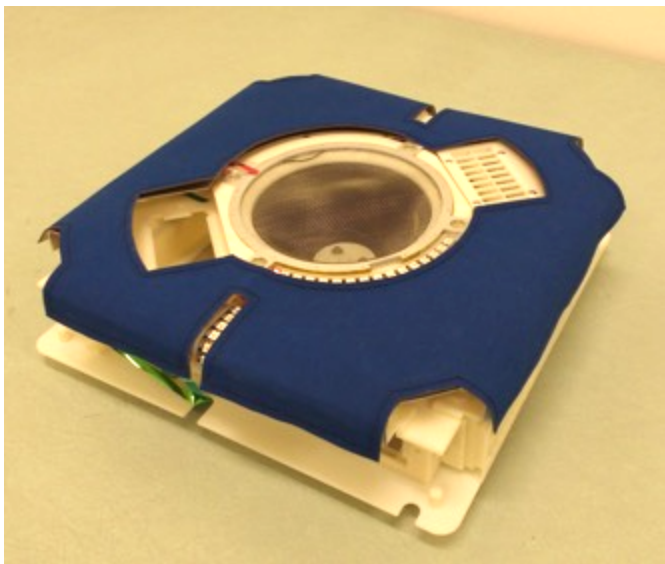




Avionics

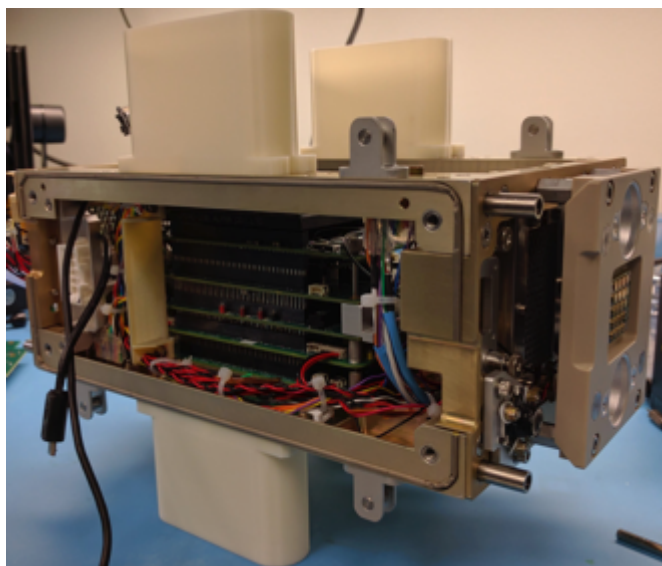


- Safety improvements (over-current, over-temperature controls)
- Improved support for software/firmware updates
- SpeedCam

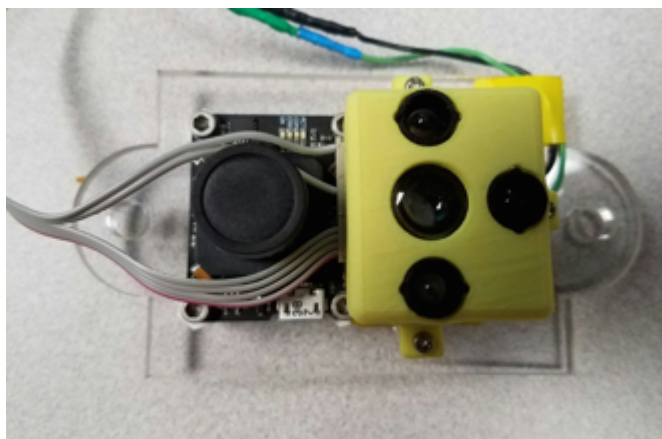



Comm


Antennas

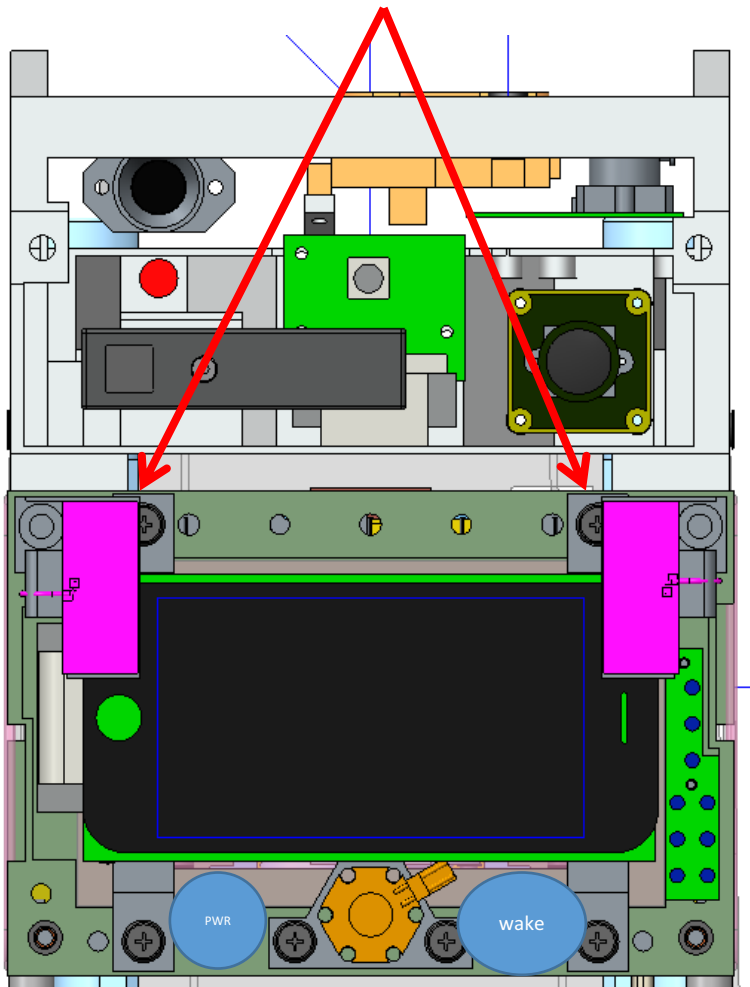


- Antenna placement
- Video distribution approach
- Telemetry recording and downlink management



Flight Software

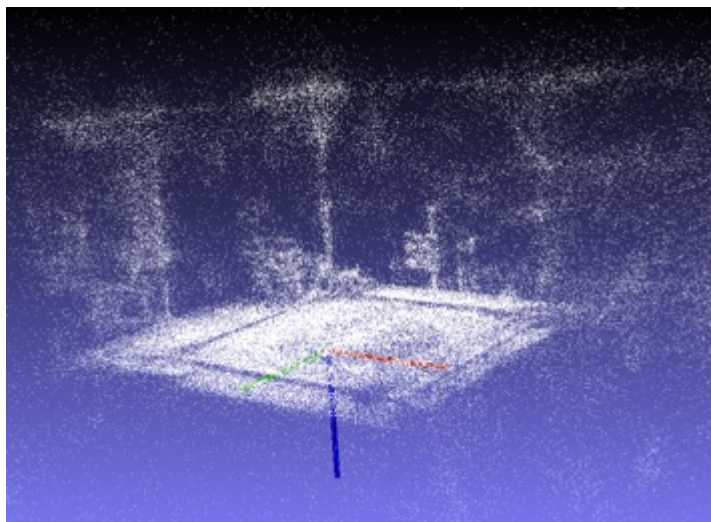


- Mode management and sequencing
- Onboard trajectory generation and collision detection
- Fault management infrastructure

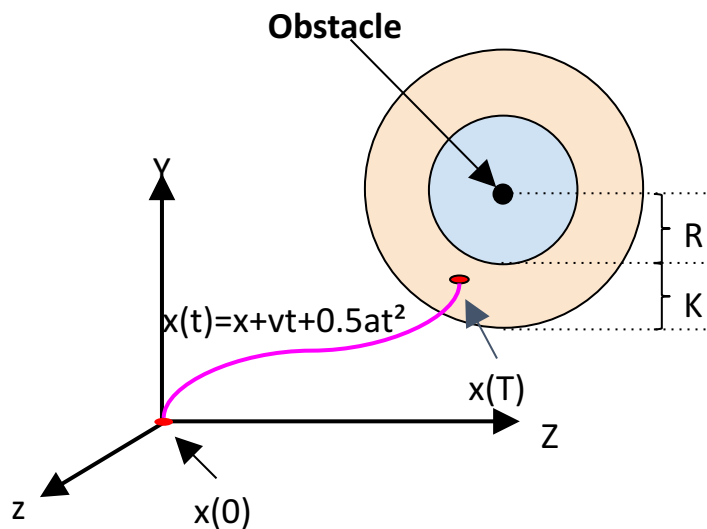




Guidance, Navigation, and Control

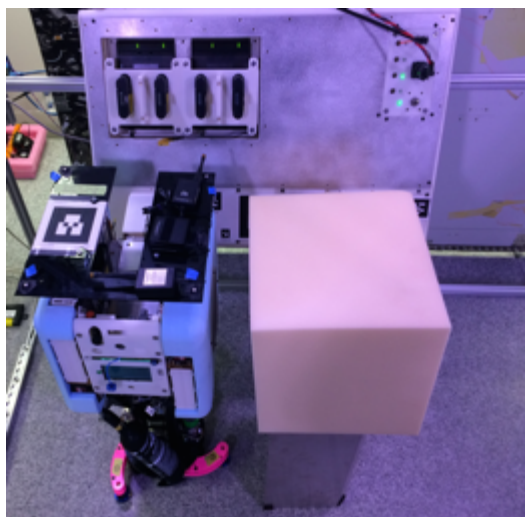

Ground effect test setup

- Visual odometry
- 6 DOF gantry testing in 1g
- Fault management

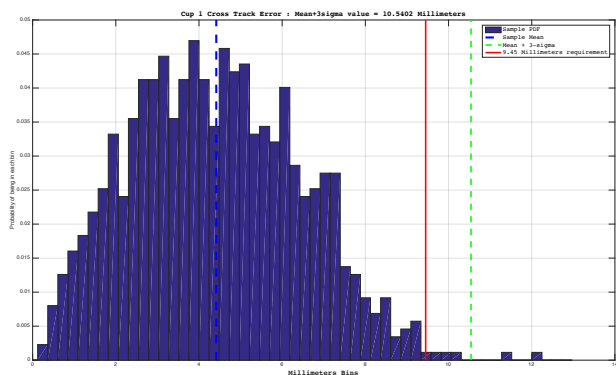


Monte Carlo error distribution



Perching Arm




- Joint servo motor
- Wire and tendon routing
- On-orbit gripper swap/upgrade

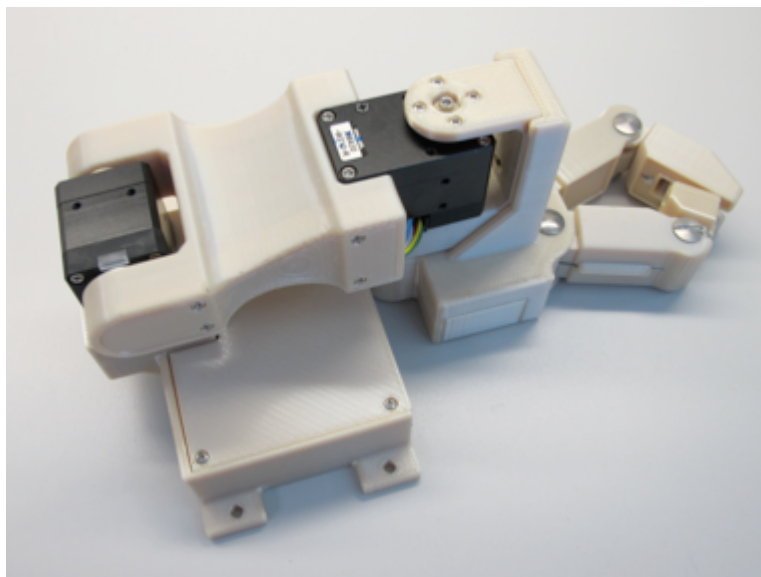




Thermal

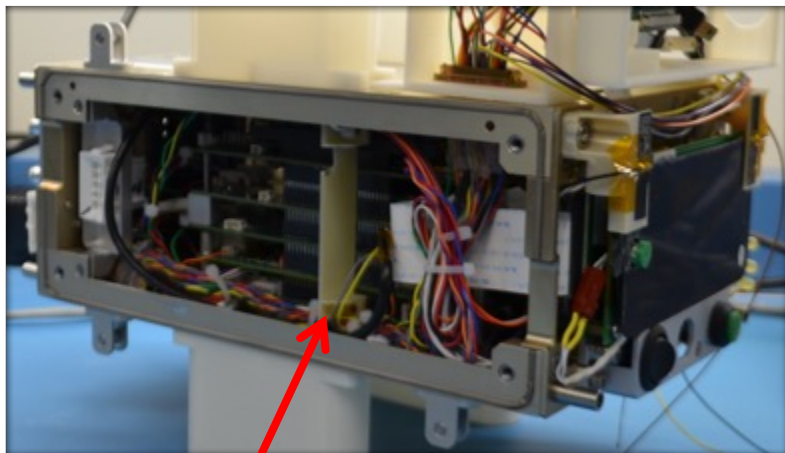


- Thermal testing and safety analysis for peripheral heat sources (e.g. arm motors)
- Arm gripper motor
- Dock thermal intake screen / minimize crew cleaning

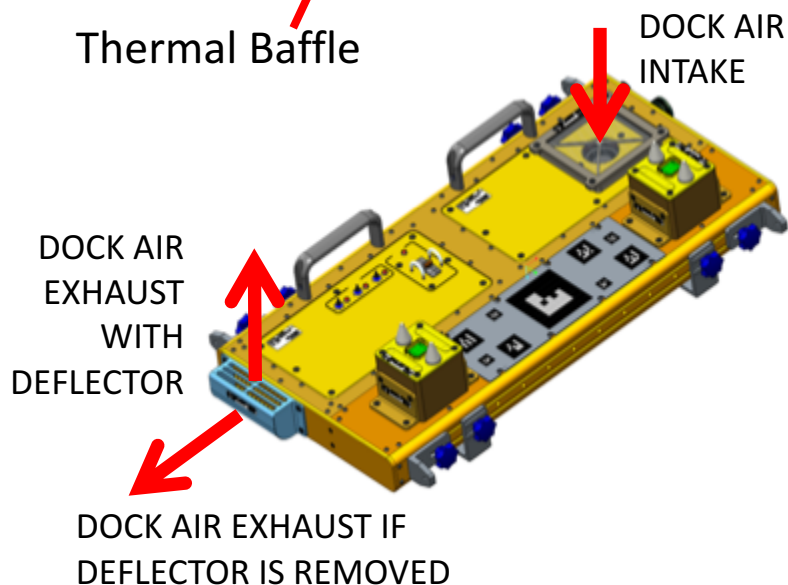



Docking Station

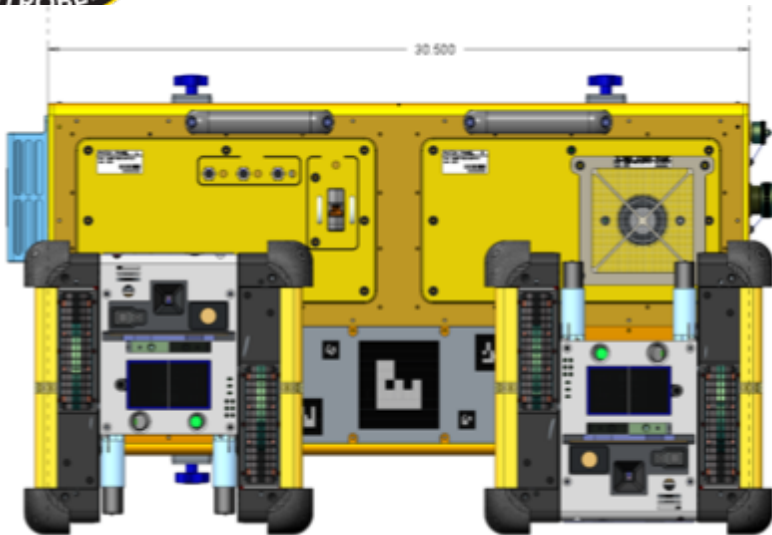



Dock Processor (same as LLP)

- Flexible ISS placement / attachment approach
- New remote wake function (requires “smart dock”)
- Separated COTS battery chargers from docking station to reduce volume / ease placement concerns



Ground Data System

- Guest science interface
- Config file management
- Fault management

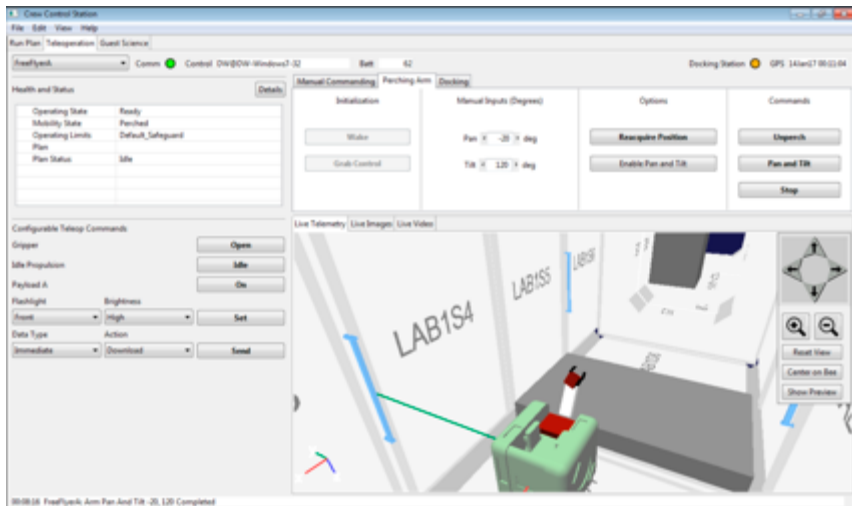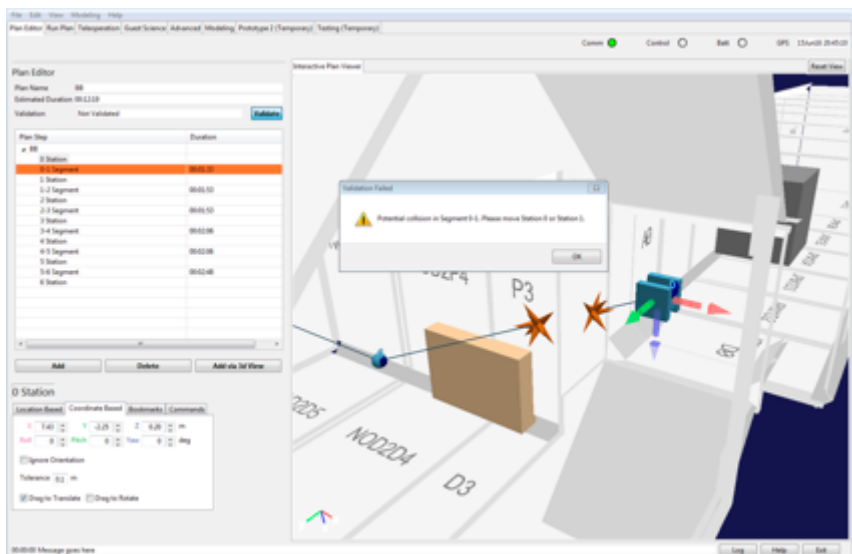

Astrobee

Human-Robot Interaction (HRI)




Design Overview




Design Goal

Characteristics

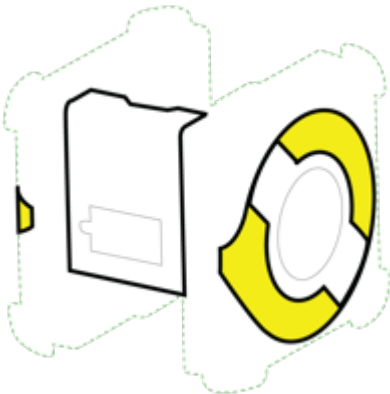


Sleek, not bulky

Attractiveness

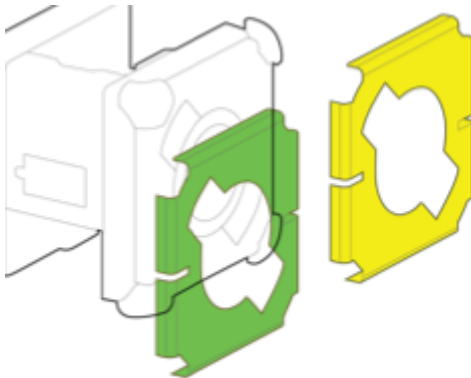


Engagement by identification

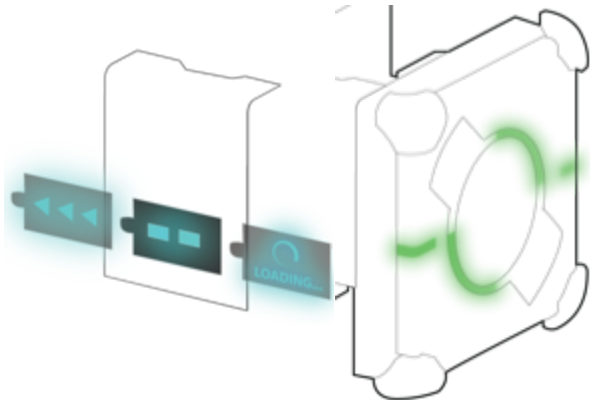


Affective & intuitive signals


Functional Affordance

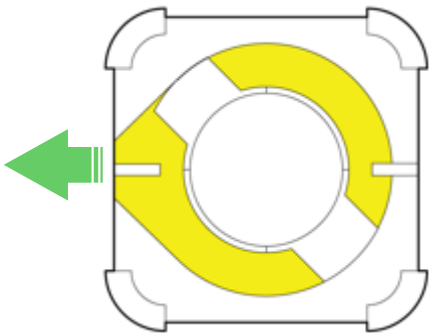

Clear indication of orientation

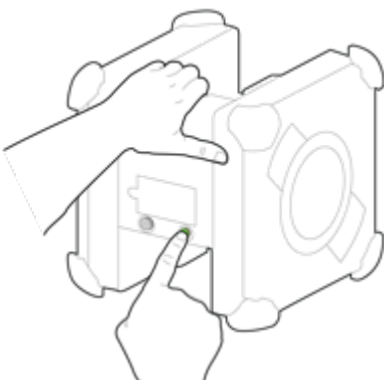

One-hand usability

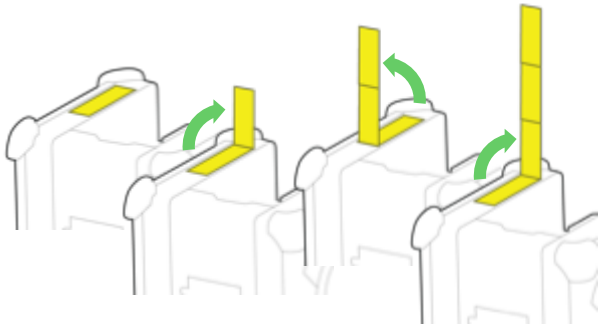

Adjustable Velcro length



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.

Component	Maturity / Risk	Forward Work
Signal LEDs	High / Low	-
Light signaling pattern	Med / Low	Follow up with crew office
Sound signal	Low / Low	Design sound & follow up with crew office
Touch screen	Low / Low	Not started yet



New/Changes from PTR3

Component	New / Changes
Signal LEDs	- New signal LED arrays on each prop module
Light signaling pattern	- New signaling LED patterns for each robot state
Sound signal	- Define useful situation
Touch screen	- Define useful situation as signal modality




Purpose of HRI

Human Perspective

- Proximal user (Crew): Aware robot states **without annoyance and task disruption**
- Distant user (Ground Operator) : **No latency** for signaling states



Human

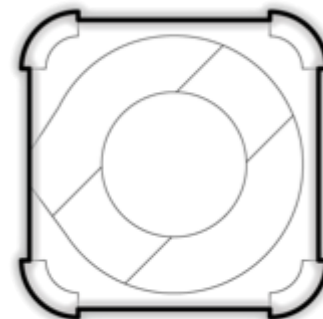

Astrobee

- Represent various state having different **criticality, urgency, and amount of information**

Robot Perspective



Non-verbal Signal

- Representing information that is important but not critical
- Provide subtle changes to reflect updates without distraction
- Moving from the periphery to the focus of attention

Light

Sound

Strength


- | | |
|---|---|
| • Visually perceived before consciously attention | • Convey information without visibility restriction |
| • Sophisticatedly express states | • Strong focus of attention |

Weakness

- | | |
|--|---|
| • Requires line of sight | • Can be perceived as interference or annoyance |
| • Interference from natural and artificial sources | • Masked by other sound |




Interaction Modality

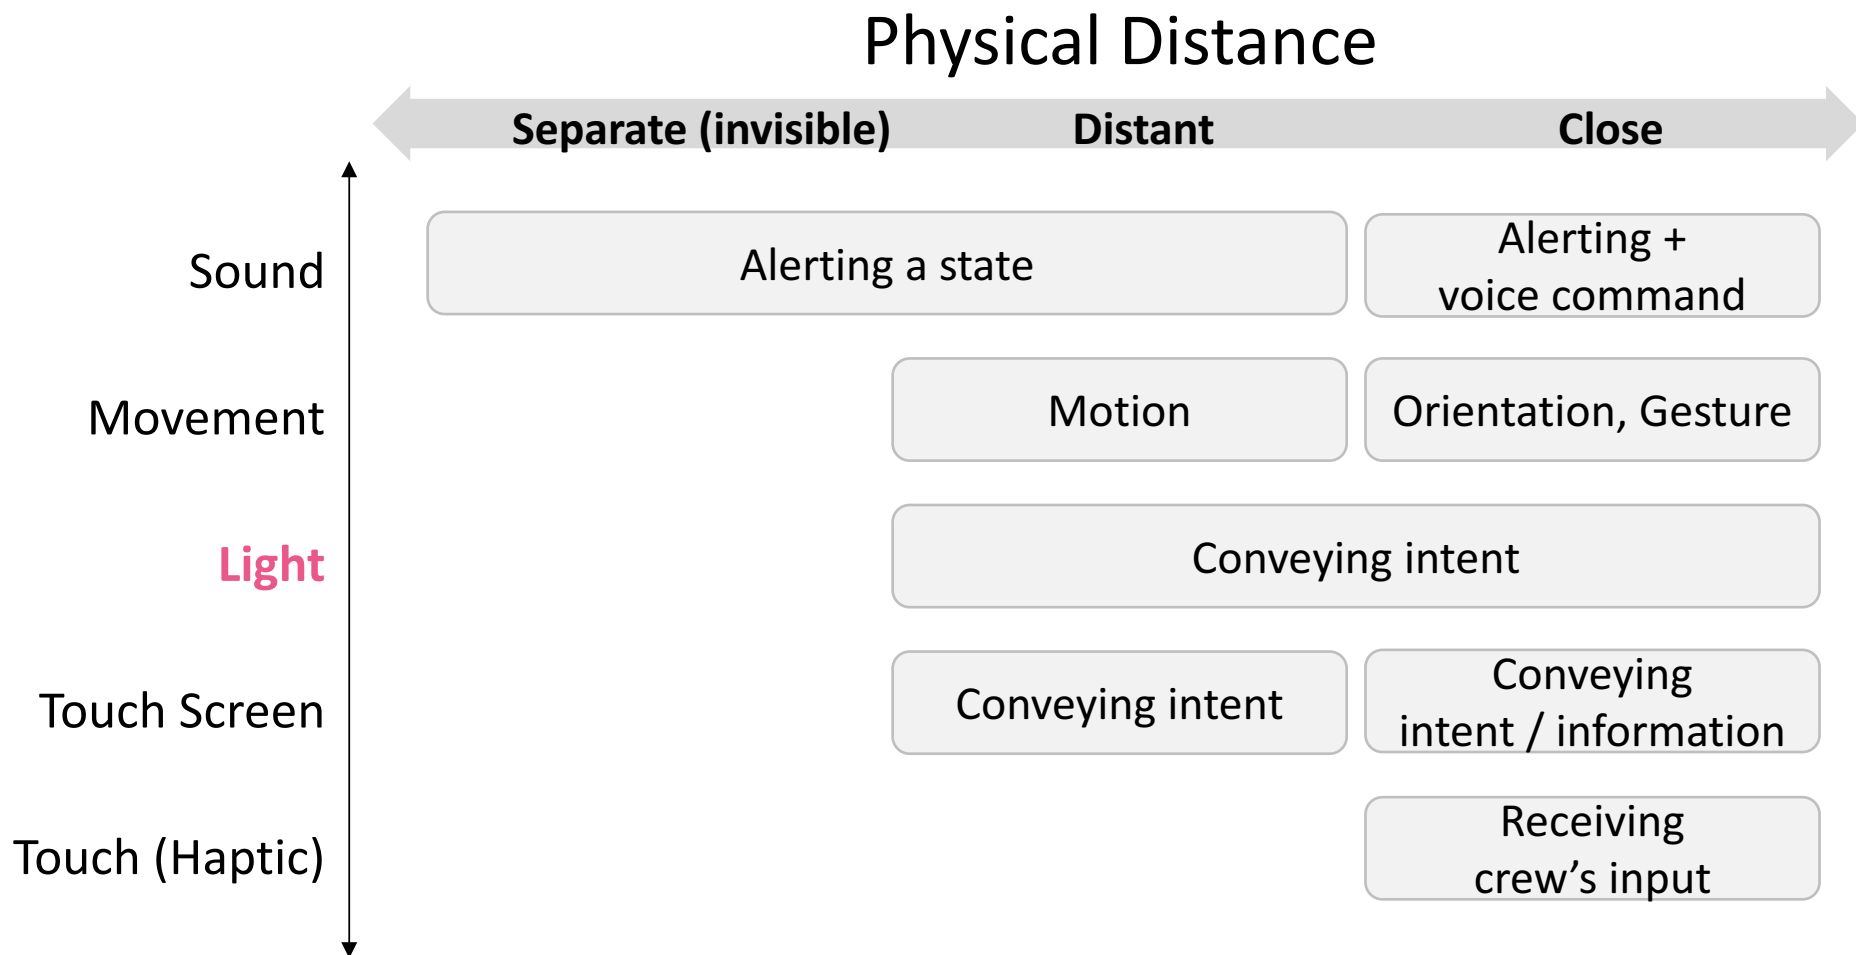



Signal Light Concept

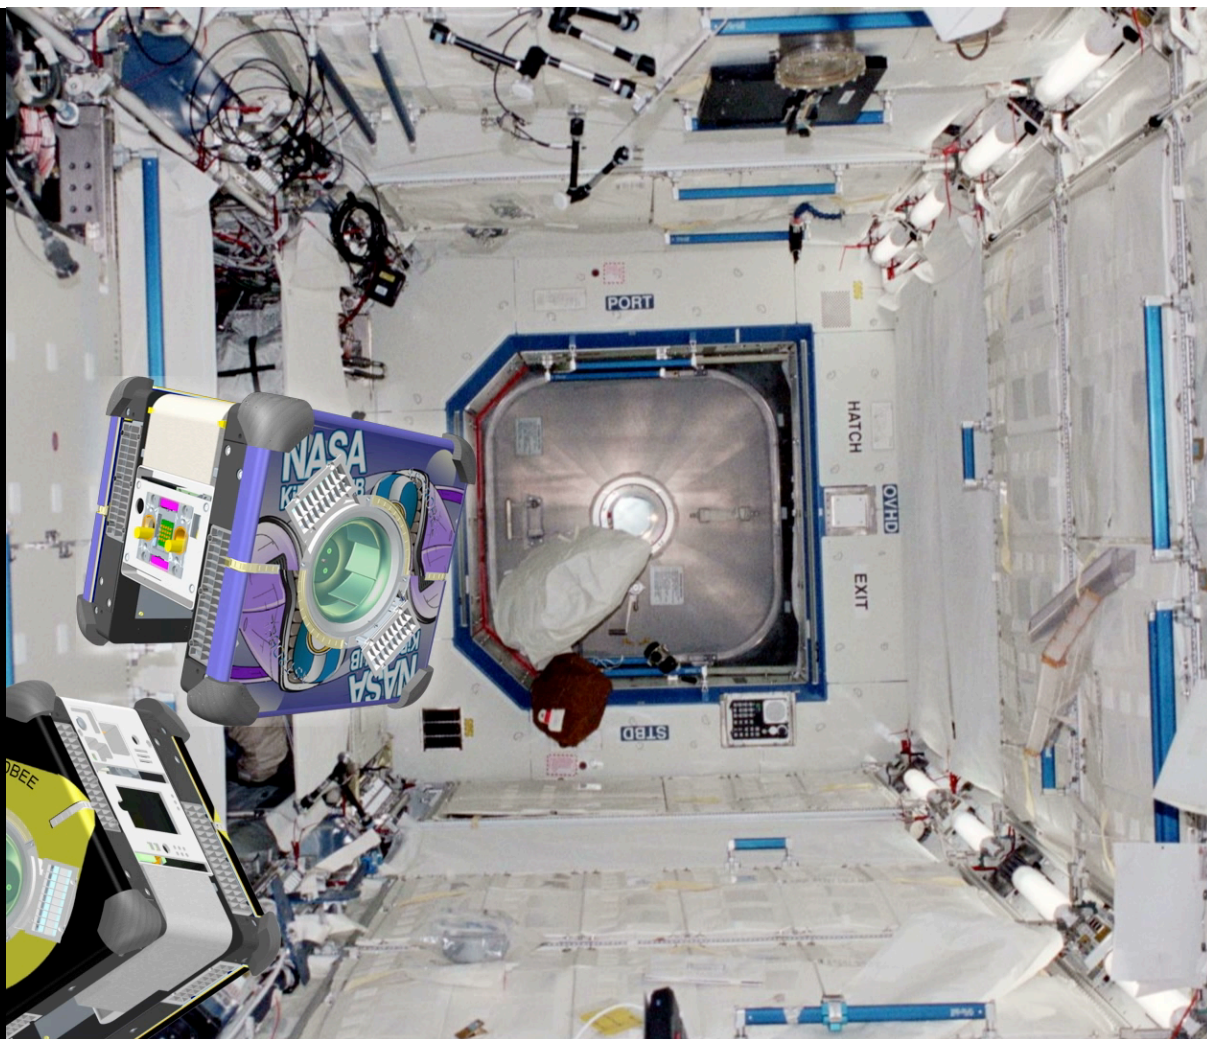




Notification Level

<i>High awareness</i>	Demand Reaction	Interrupt until user does action
	Interrupt	Demand attention (flashing, beeping, vibration, etc.)
	Make Aware	to help people decide their further action
	Change Blind	tiny updates, slow, fade (help people expect robot's overall action)
	Ignore	no change (let people aware of why robot is awoken / whether the robot is awoken)
<i>Low awareness</i>		




Notification Level & Robot States

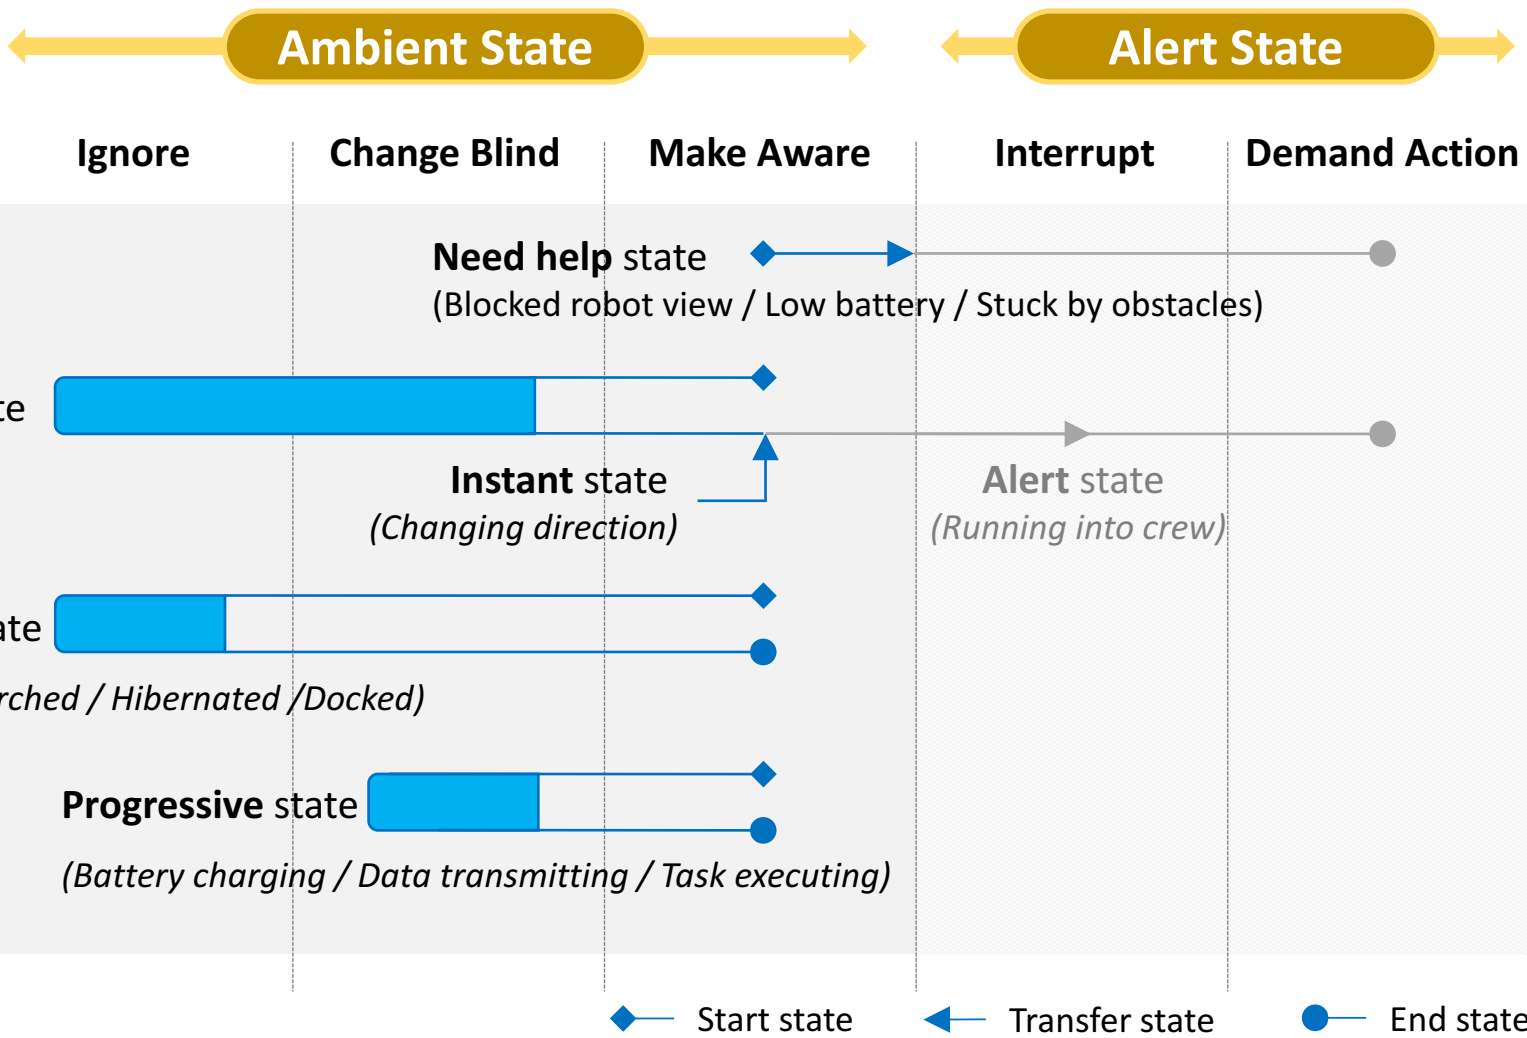




Signal Light Design

Hibernating

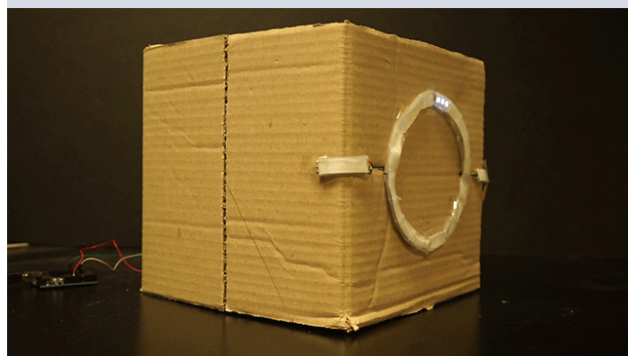


Blink, White

Stationary

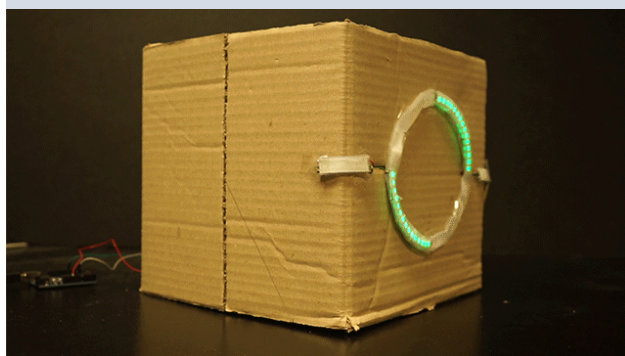


Blink, Green

Moving

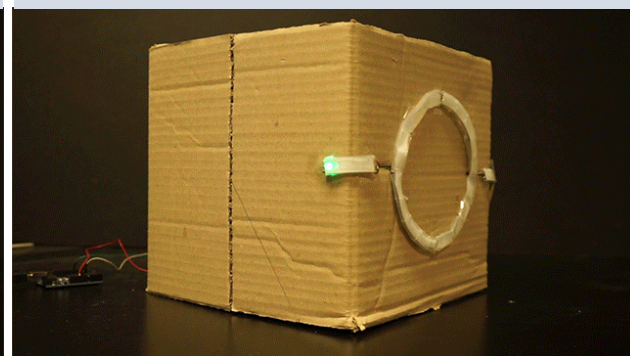


Flowing, Green

Data Transmit / Task Execute

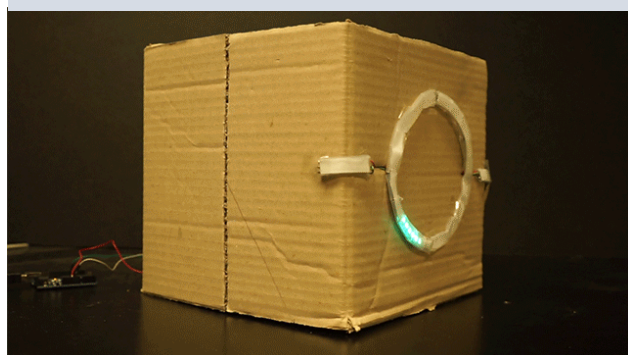

Spinning, Cyan

Stuck by Obstacle

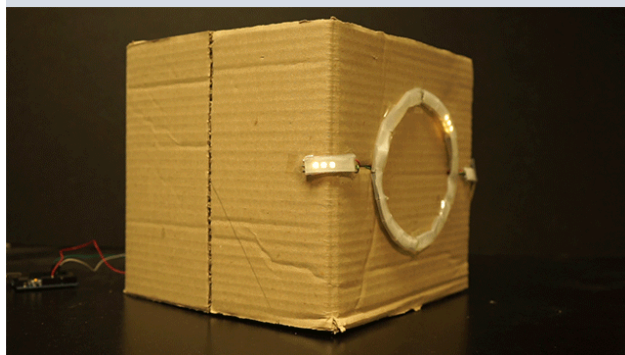

Blink, Amber


Running into Crew






Crew Privacy

- Using **blue color** only for indicating *Audio Recording* state
- Representing *Audio Recording* states on **all side of Astrobee**
 - status LEDs on front/aft face & signal LEDs on both props

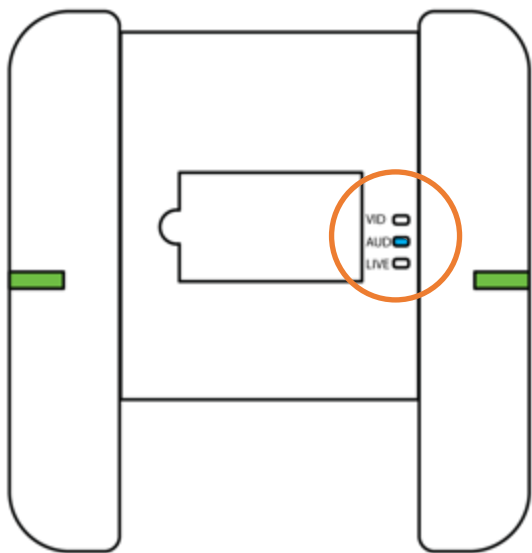

Front face

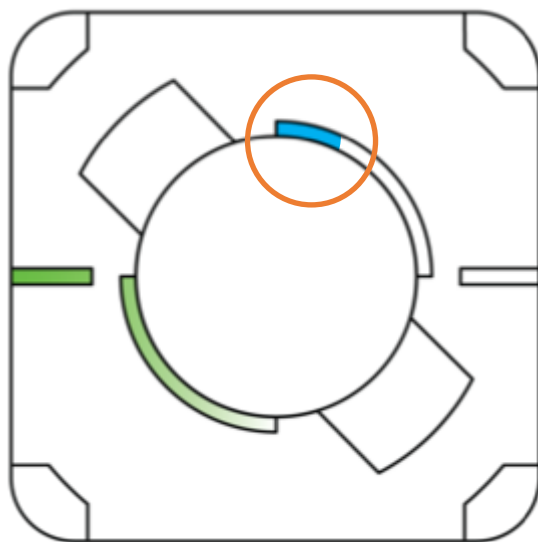

Prop



Audio Recording
while **Moving**

Astrobee Structure Subsystem



Design Overview



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

Component	Maturity / Risk	Forward Work
Core Module	High / Low	<ul style="list-style-type: none">- Implement P4D findings- Finalize battery retention system
Top Forward Module	High / Low	<ul style="list-style-type: none">- Implement P4D findings- Incorporate Al. Structure- Incorporate NavCam protection
Forward Group	High / Low	<ul style="list-style-type: none">- Implement P4D findings
Aft Group	High / Low	<ul style="list-style-type: none">- Implement P4D findings
Forward and Aft Bezels	Medium / Low	<ul style="list-style-type: none">- Implement P4D findings- Finalize inlet screen



New/Changes from PTR3

Component	New / Changes
Core Module	<ul style="list-style-type: none">- Changed replaceable modules and incorporate designs- Changed fwd antenna locations- New camera locations- New button location and design- New status led designs- Changed Avionics location- New Payload attachment design- New top cover removal screw- New wire routing features
Top Forward Module	<ul style="list-style-type: none">- Changed replaceable modules and incorporated designs- New camera locations- New wire cover design
Forward Group	<ul style="list-style-type: none">- Changed touchscreen location
Aft Group	<ul style="list-style-type: none">- Changed docking cups orientation and cup size- Changed aft antenna location
Forward and Aft Bezels	<ul style="list-style-type: none">- Change fwd and aft cooling air vents- New forward bezel configuration



Astrobee Images




Forward Top



Aft Top




Base Layout

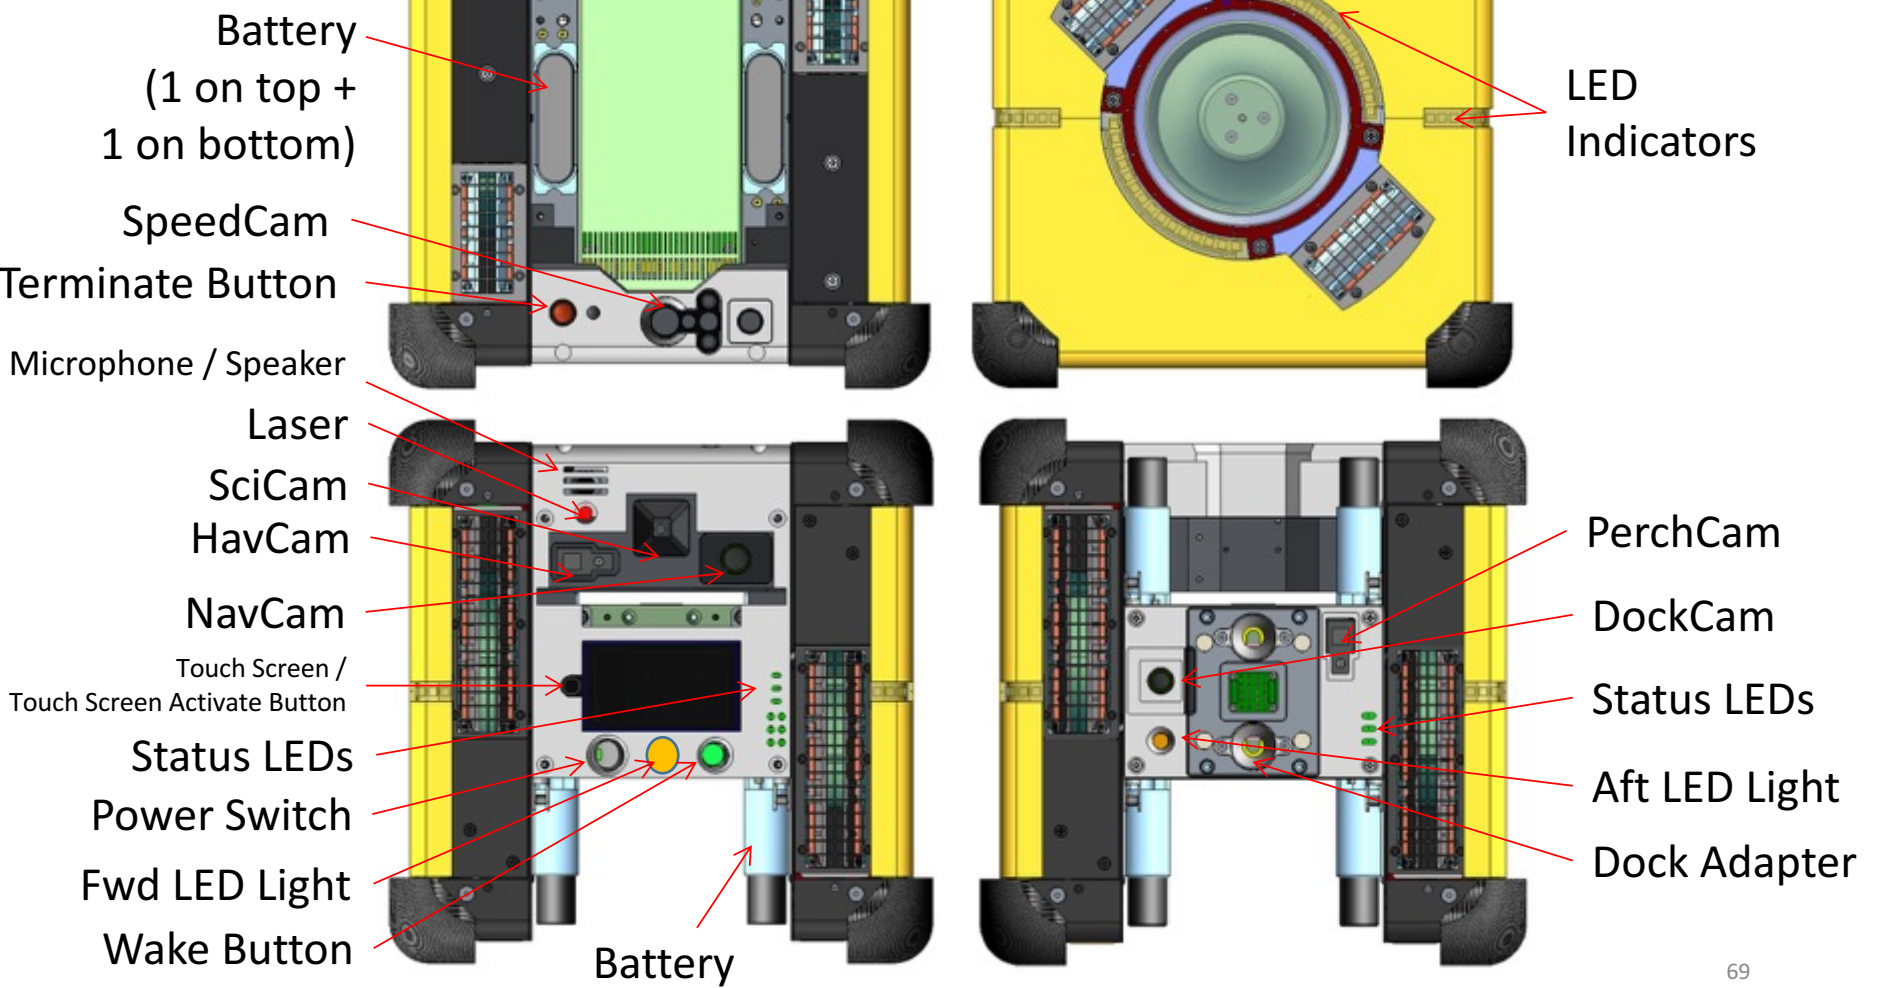




Payload Layout

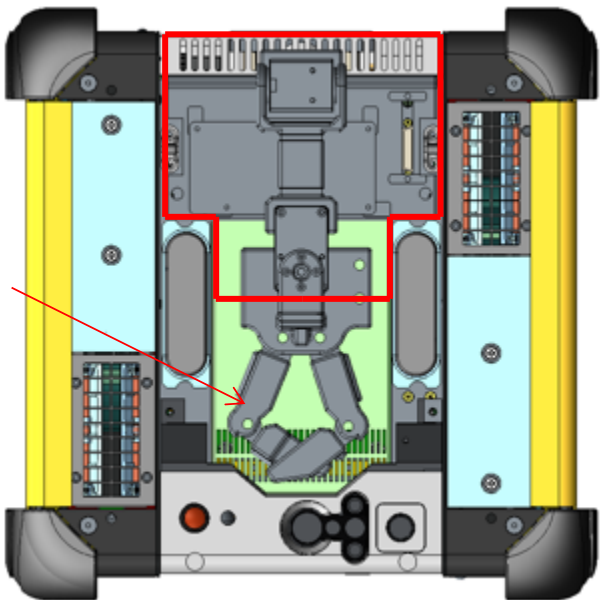


Perch Arm is larger than 1U

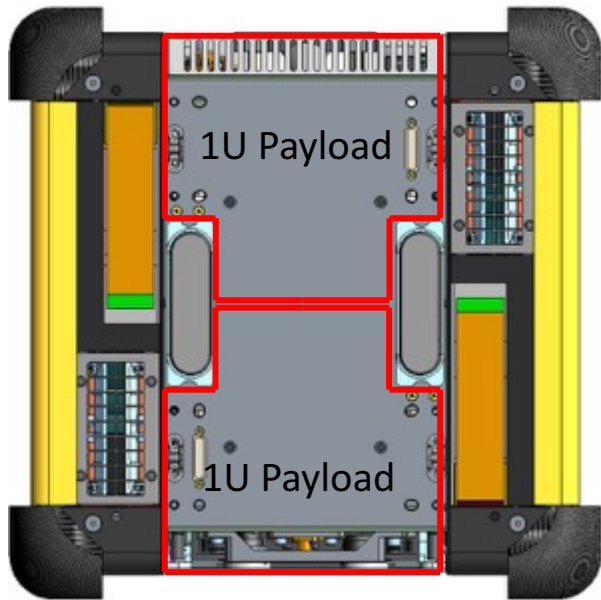

Core Connector
31 POS PLUG (M835130E03C)

2X Clevis

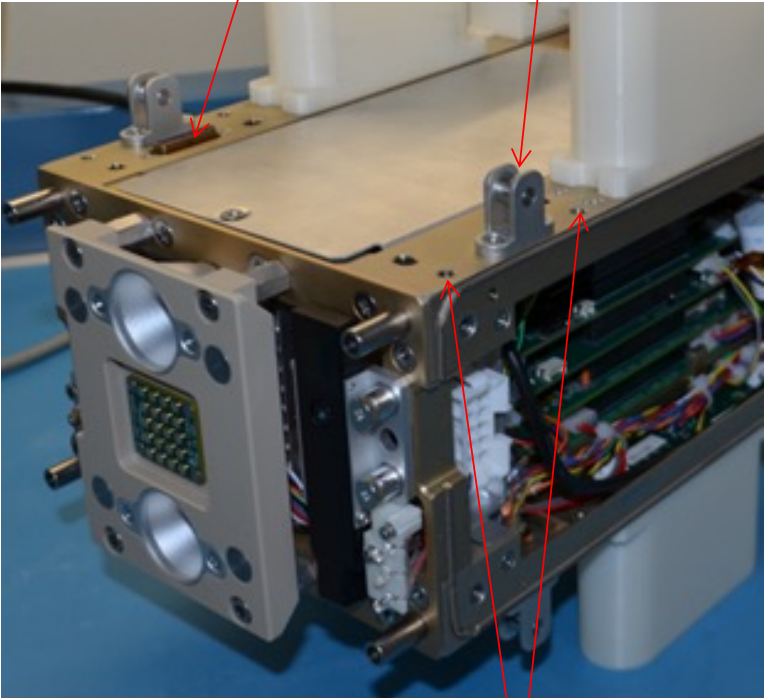


4X #8-32 Thread



Payload Mechanical Attachment Options


Quick "No Tool" Payload Attachment

2X Lever
(open position)

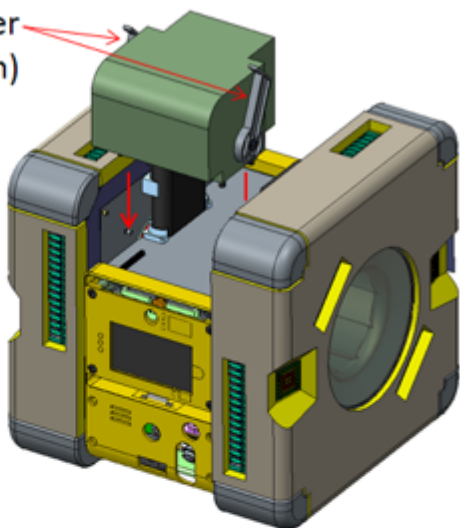


Lever engages and disengages payload connector and provides mechanical attachment

Lever in "Locked" position

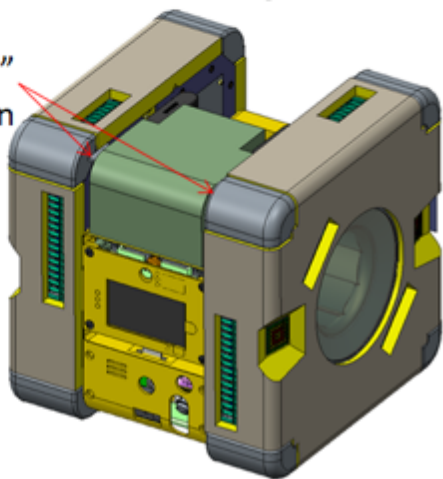


4X Fastener Payload Attachment

4X Captive Fasteners

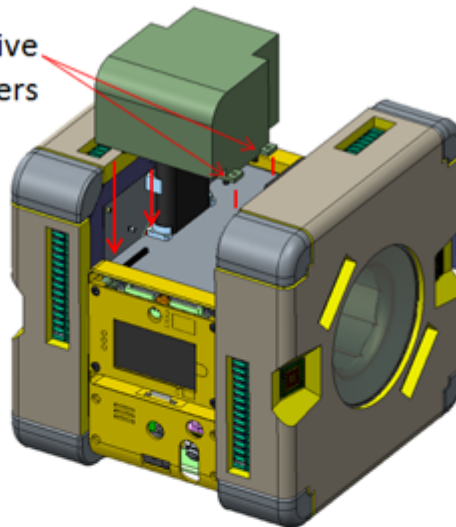

"Un-Lock"
Position

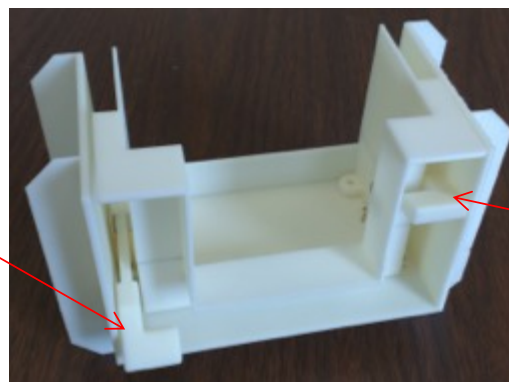


"Lock"
Position



Core and Forward Module

Top Forward Module
(in ABS Prototype)

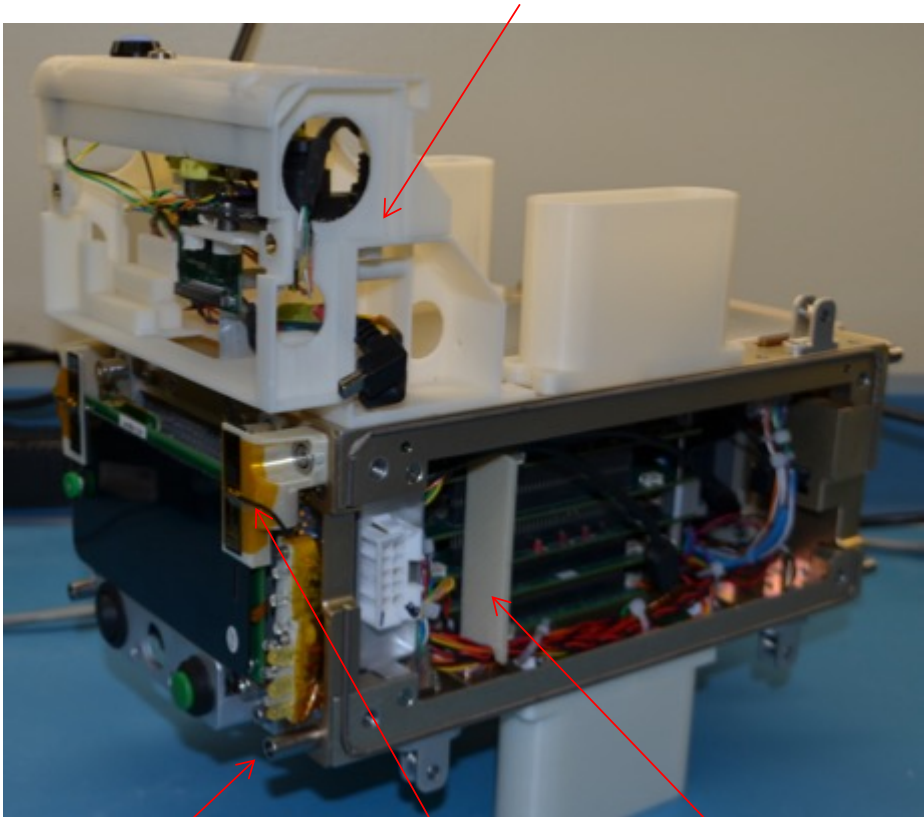


Forward Bezel
Not shown

Fwd Antennas


Air deflector

Battery Retainer

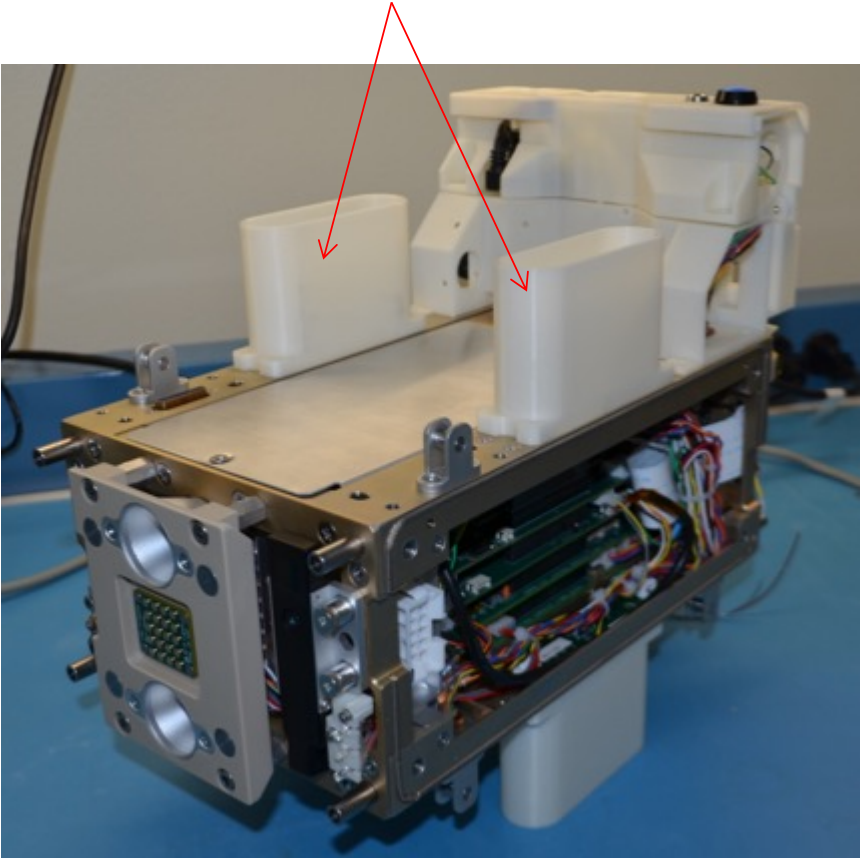




Aft Module

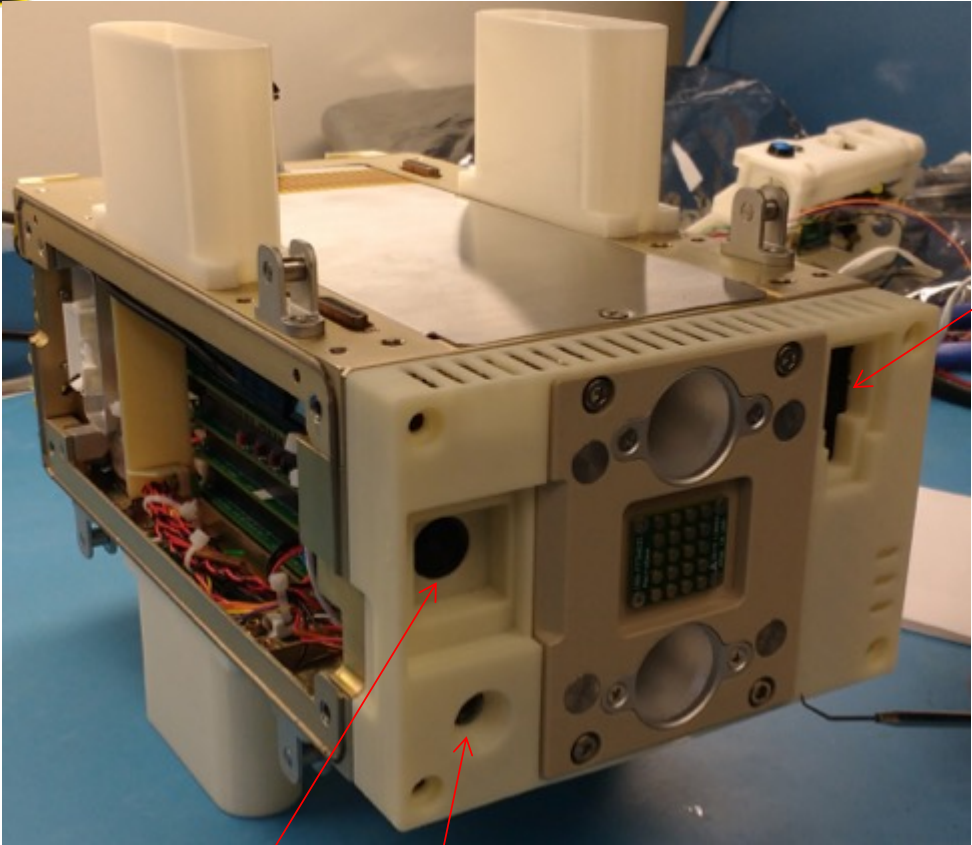

DockCam

Aft LED Light

Perch Cam

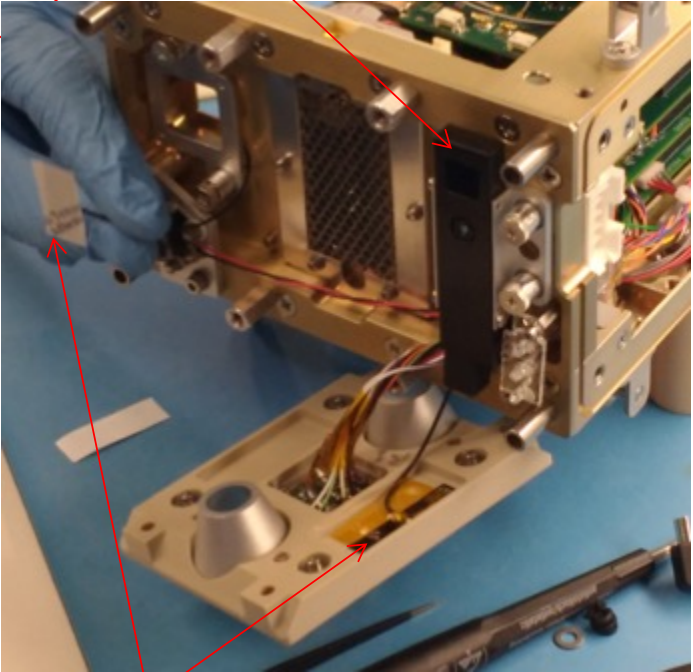

Aft Antennas

Astrobee Propulsion Subsystem



Design Overview



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

Component	Maturity / Risk	Forward Work
Plenum	High/Low	Improve strength
Top Cover and Skins	High/Low	Finalize skin attachment methods. See Yun's slides
Signal Lights	High/Low	See Yun's slides
Restraint Straps	High/Low	
Impact Mitigation	High/Low	Finalize bumper nomex cover design
Nozzles	High / Low	
Impeller/Motor	High/Low	



New/Changes from PTR3

Component	New / Changes
Plenum	<ul style="list-style-type: none">- Added features for covers and nozzle changes
Top Cover and Skins	<ul style="list-style-type: none">- New Al. Top Cover with softlayer- New skin design
Signal Lights	<ul style="list-style-type: none">- New signal light design
Restraint Straps	<ul style="list-style-type: none">- New restraint strap design
Impact Mitigation	<ul style="list-style-type: none">- Finalized bumper materials- Confirm bumper force performance with testing- New softlayer design
Nozzles	<ul style="list-style-type: none">- New vibration isolation and seal components- Change to servo spline drive shaft- Change drive shaft gear- New servo thermal sensor
Impeller/Motor	<ul style="list-style-type: none">- New stiffened impeller




Astrobee Design

Two identical Propulsion Modules on Astrobee



Left Propulsion Module

Front ISO View


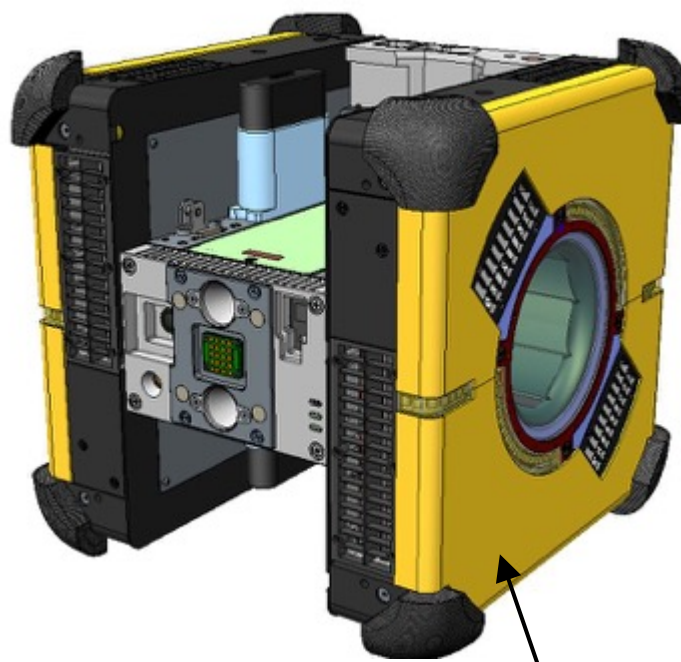


Right Propulsion Module

Aft ISO View



Top Cover and Skins

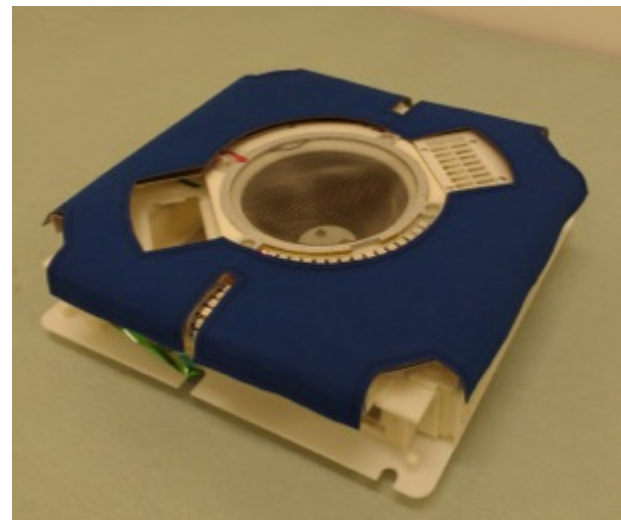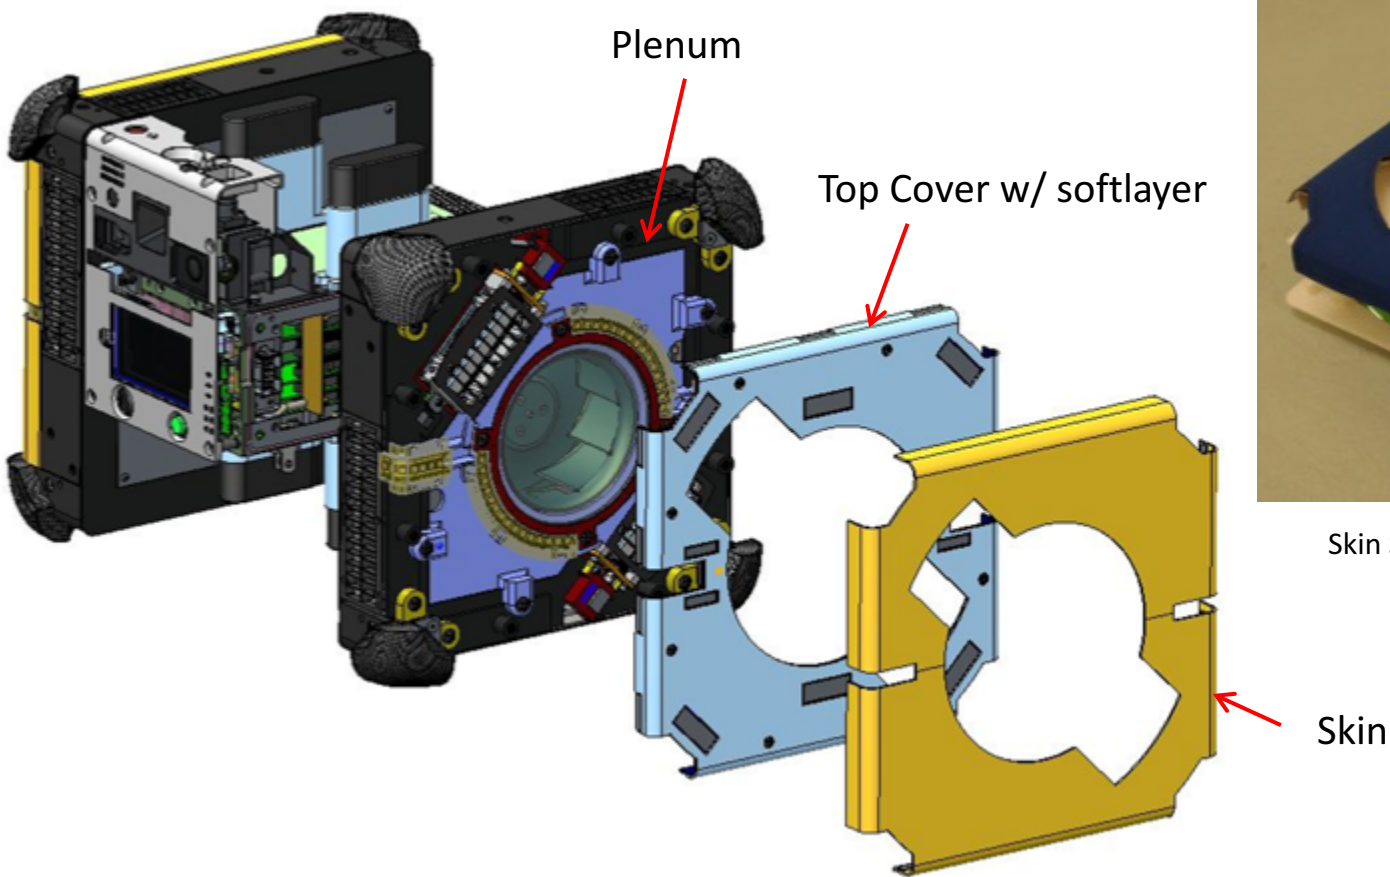


Skin Sample made in JSC Soft Goods

Top Cover: Aluminum sheet with soft layer and Velcro patches
Skin Material: Nomex / Chemglass w/ Velcro Hook and Loop patches
Graphics: Printed on Nomex



Programmable Signal Lights

Seven LEDs wrap around front and aft edges

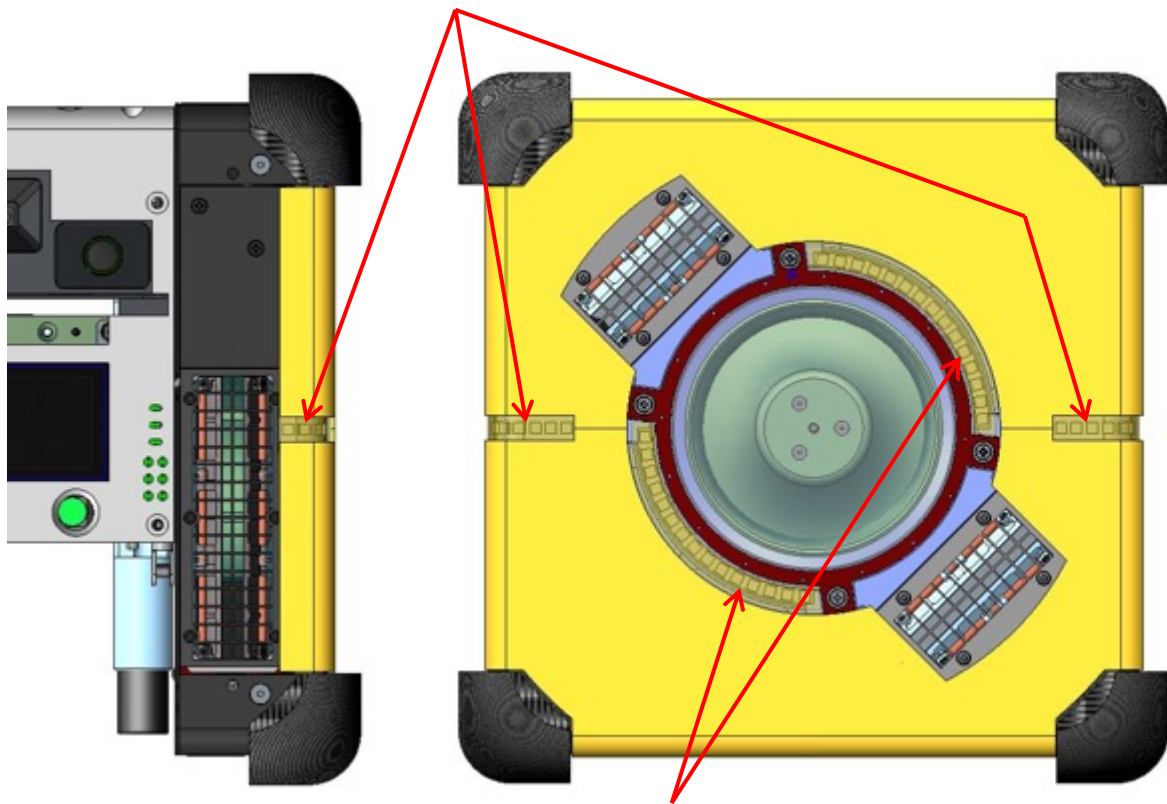

Fifteen (each) LEDs on ~6" dia.




LED: 1/4" Square Multi-color Adafruit NeoPixel



Restraint Straps

Strap with Velcro hook allows Astrobee to be restrained to ISS loop patches

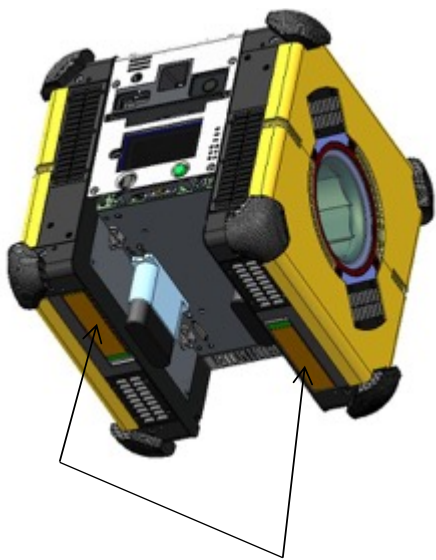


Two deployable straps
for restraining Astrobee on
station. Velcro Hook on ends of
straps



Strap is unfolded
1 fold



Strap is unfolded
2 folds

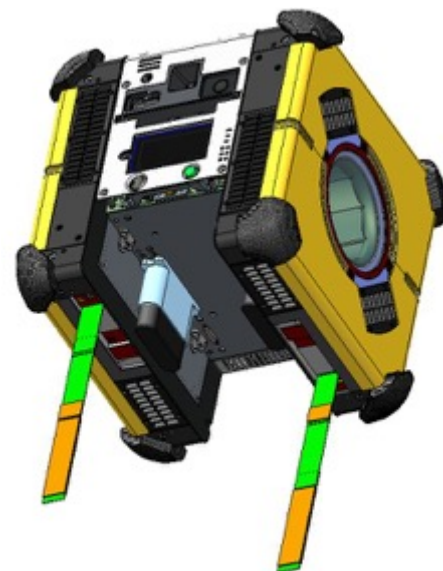

Fully Deployed
~ 10" Strap

Strap Material: Nomex with Velcro Hook and Loop patches

Full Length: ~10 inches

Design Strength: 10 lbf



Impact Bumpers & Surfaces



"Soft Layers" 1/16" thick foam

Soft Layers Defined (Layer A and Layer B)





Prop Covering X-Sec

8X Corner Bumpers

Soft layer B
(Peel Ply / TT / Bisco / TT / Nomex)


All other Covering X-Sec

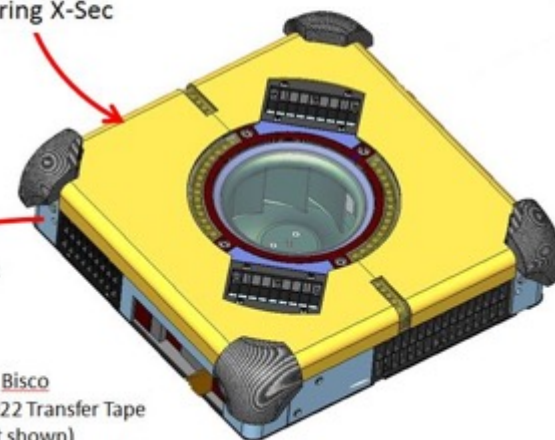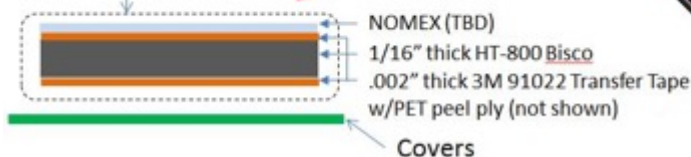



Impact Bumpers

Max operational resultant force < 125 lbf, Max force < 1000 lbf

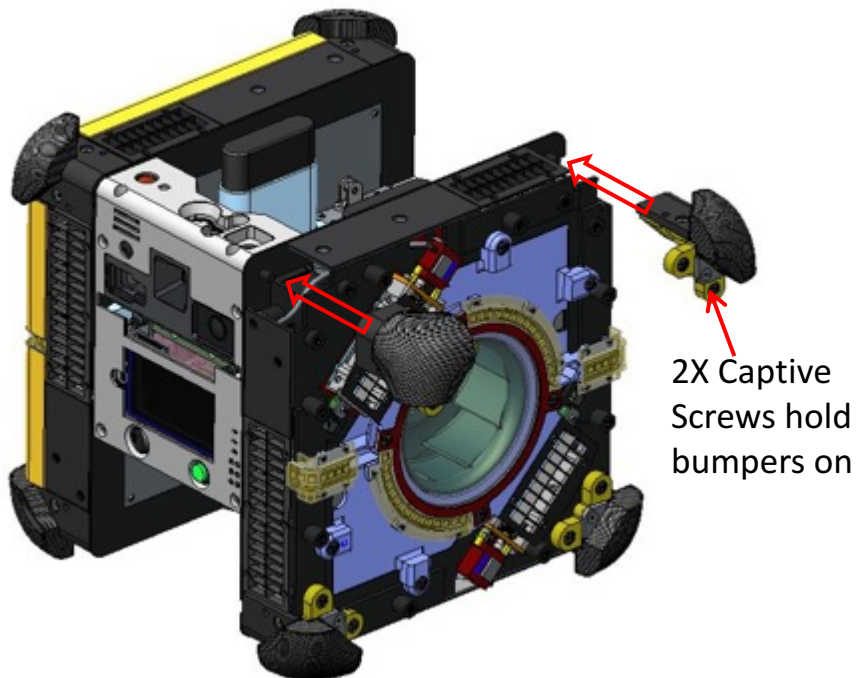

2X Captive
Screws hold
bumpers on


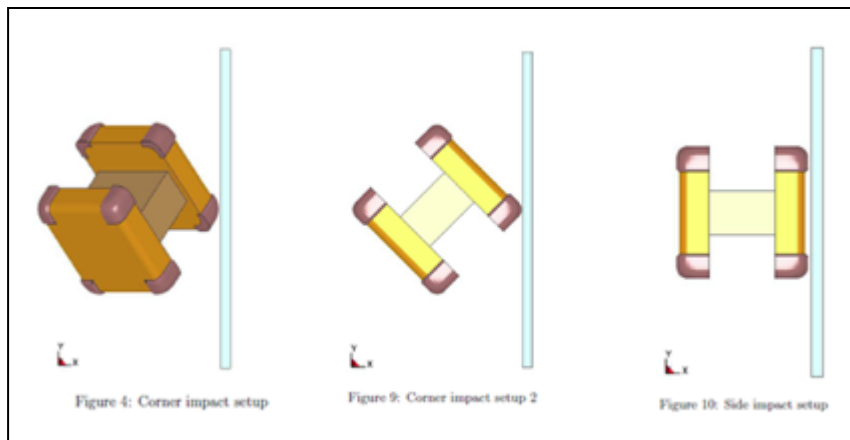




Figure 4: Corner impact setup

Figure 9: Corner impact setup 2

Figure 10: Side impact setup

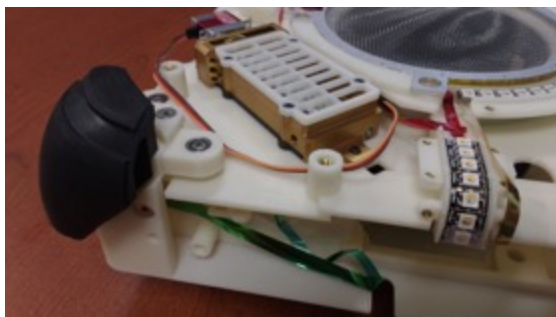

Bumper Material:
Arti-lage SH28 PU
energy absorbing
foam w/ Nomex
cover

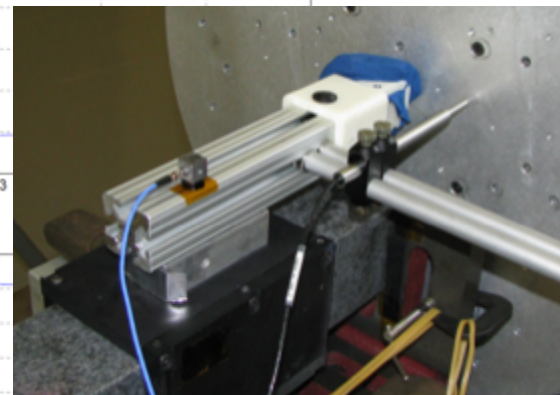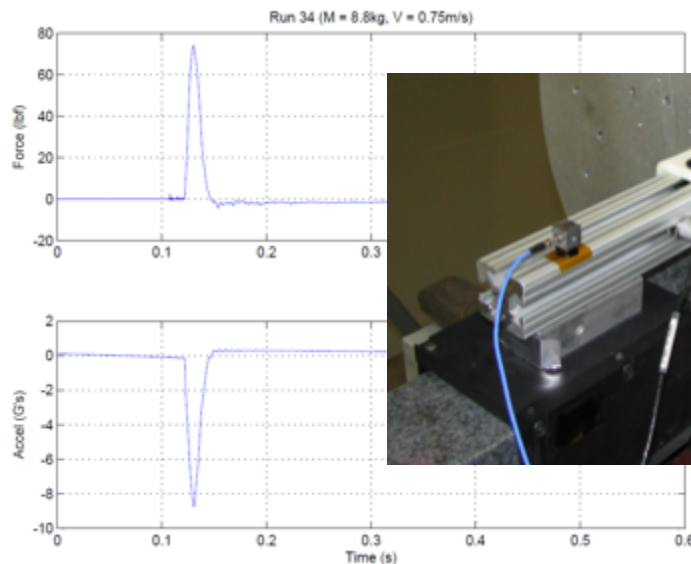



Impact Bumper Testing




Nozzle Subassembly



Nozzle Isolation Testing

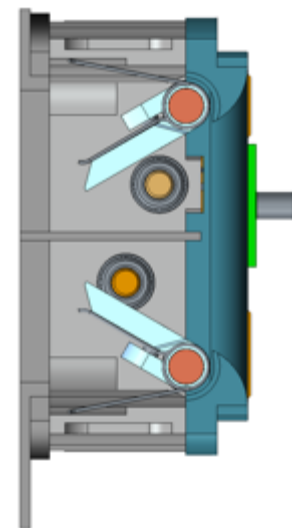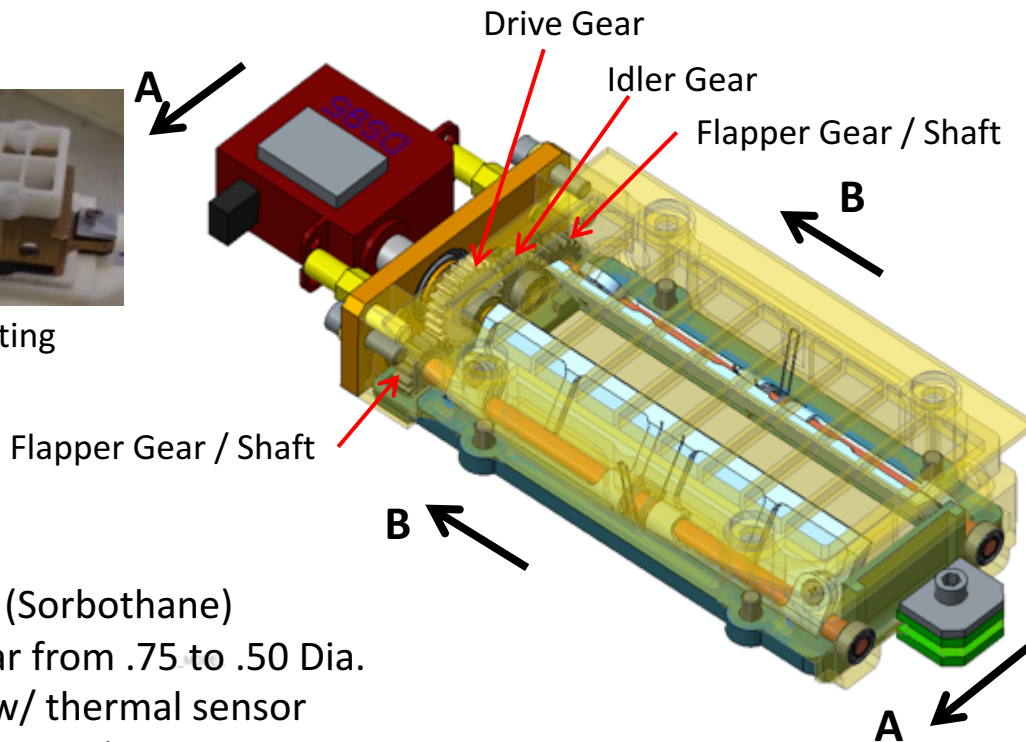

Sec B-B

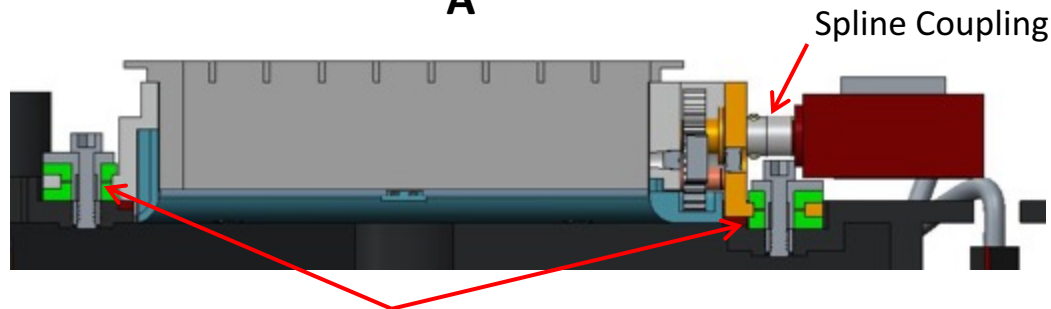

Vibration Isolators

Sec A-A

- Vibration Isolation (Sorbothane)
- Reduced Drive Gear from .75 to .50 Dia.
- COTS MKS Servos w/ thermal sensor
- Splined drive shaft (Cert/Flight)

Astrobee Propulsion Subsystem Avionics and Software



Delta-PTR3 Design Overview



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.


Component	Maturity / Risk	Forward Work
Prop Avionics Hardware	High/Low	Board layout updates required before Cert build
PMC SW	High/Low	



Summary of Changes from PTR3


Component	New / Changes
Nozzle Servos	Replaced MKS DS92 with DS95
PMC Board	Added PWM chip for nozzle servo control
PMC Board	Added LED processor (Independent circuit from prop control)
Temp Sensors	Temperature sensors (AD590) added to all servos and impeller motor

Propulsion Module: Impeller Design

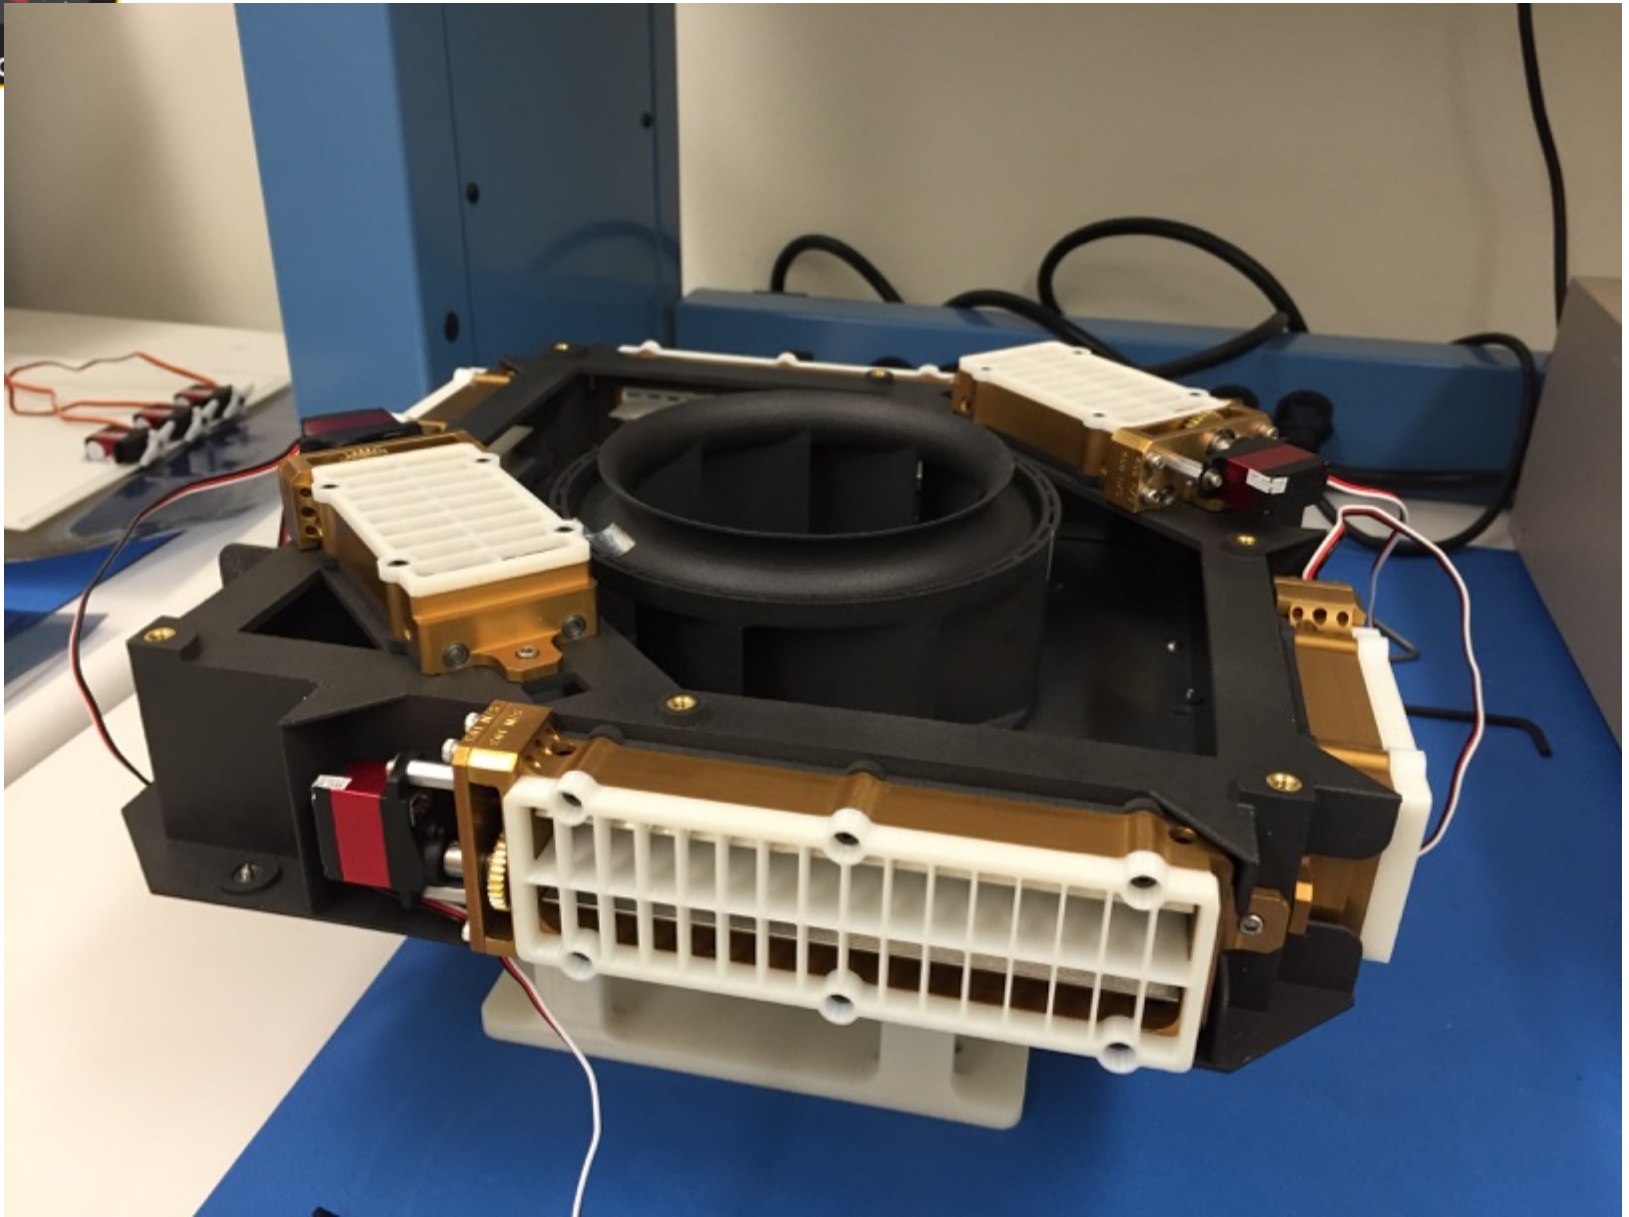




Propulsion Electronic Components

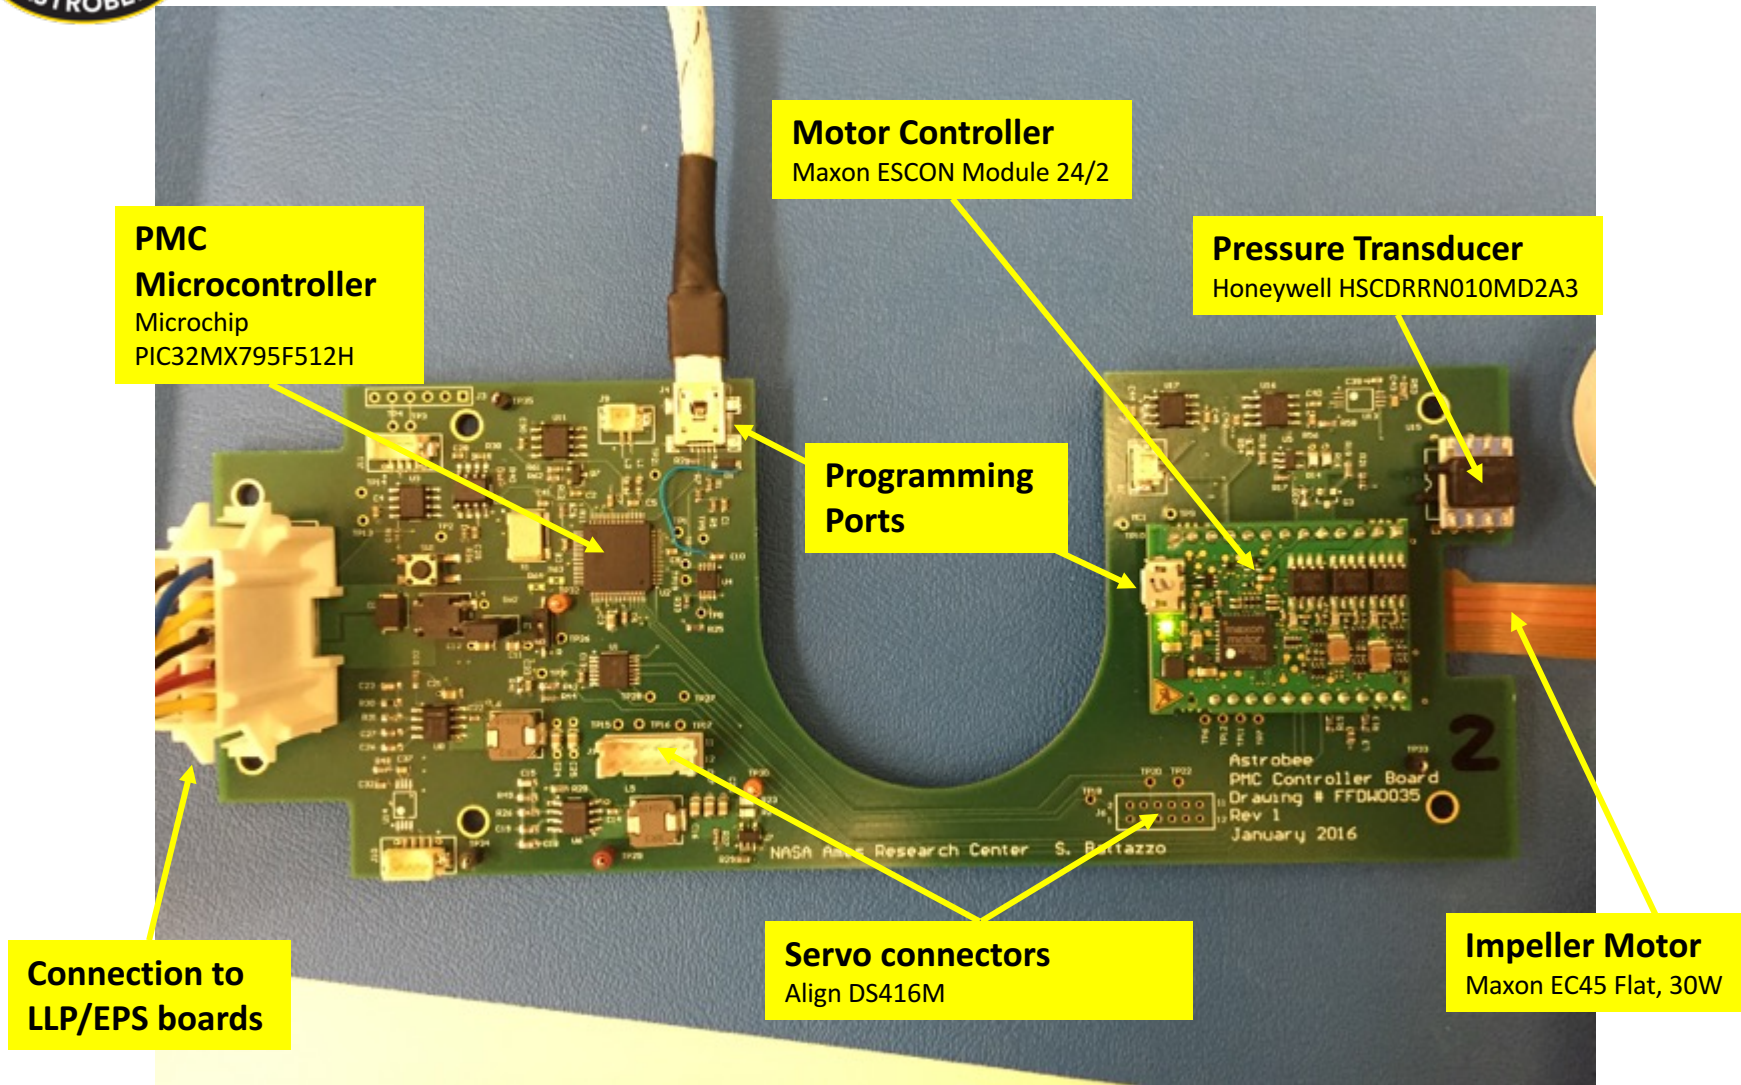



PMC Architecture Diagram

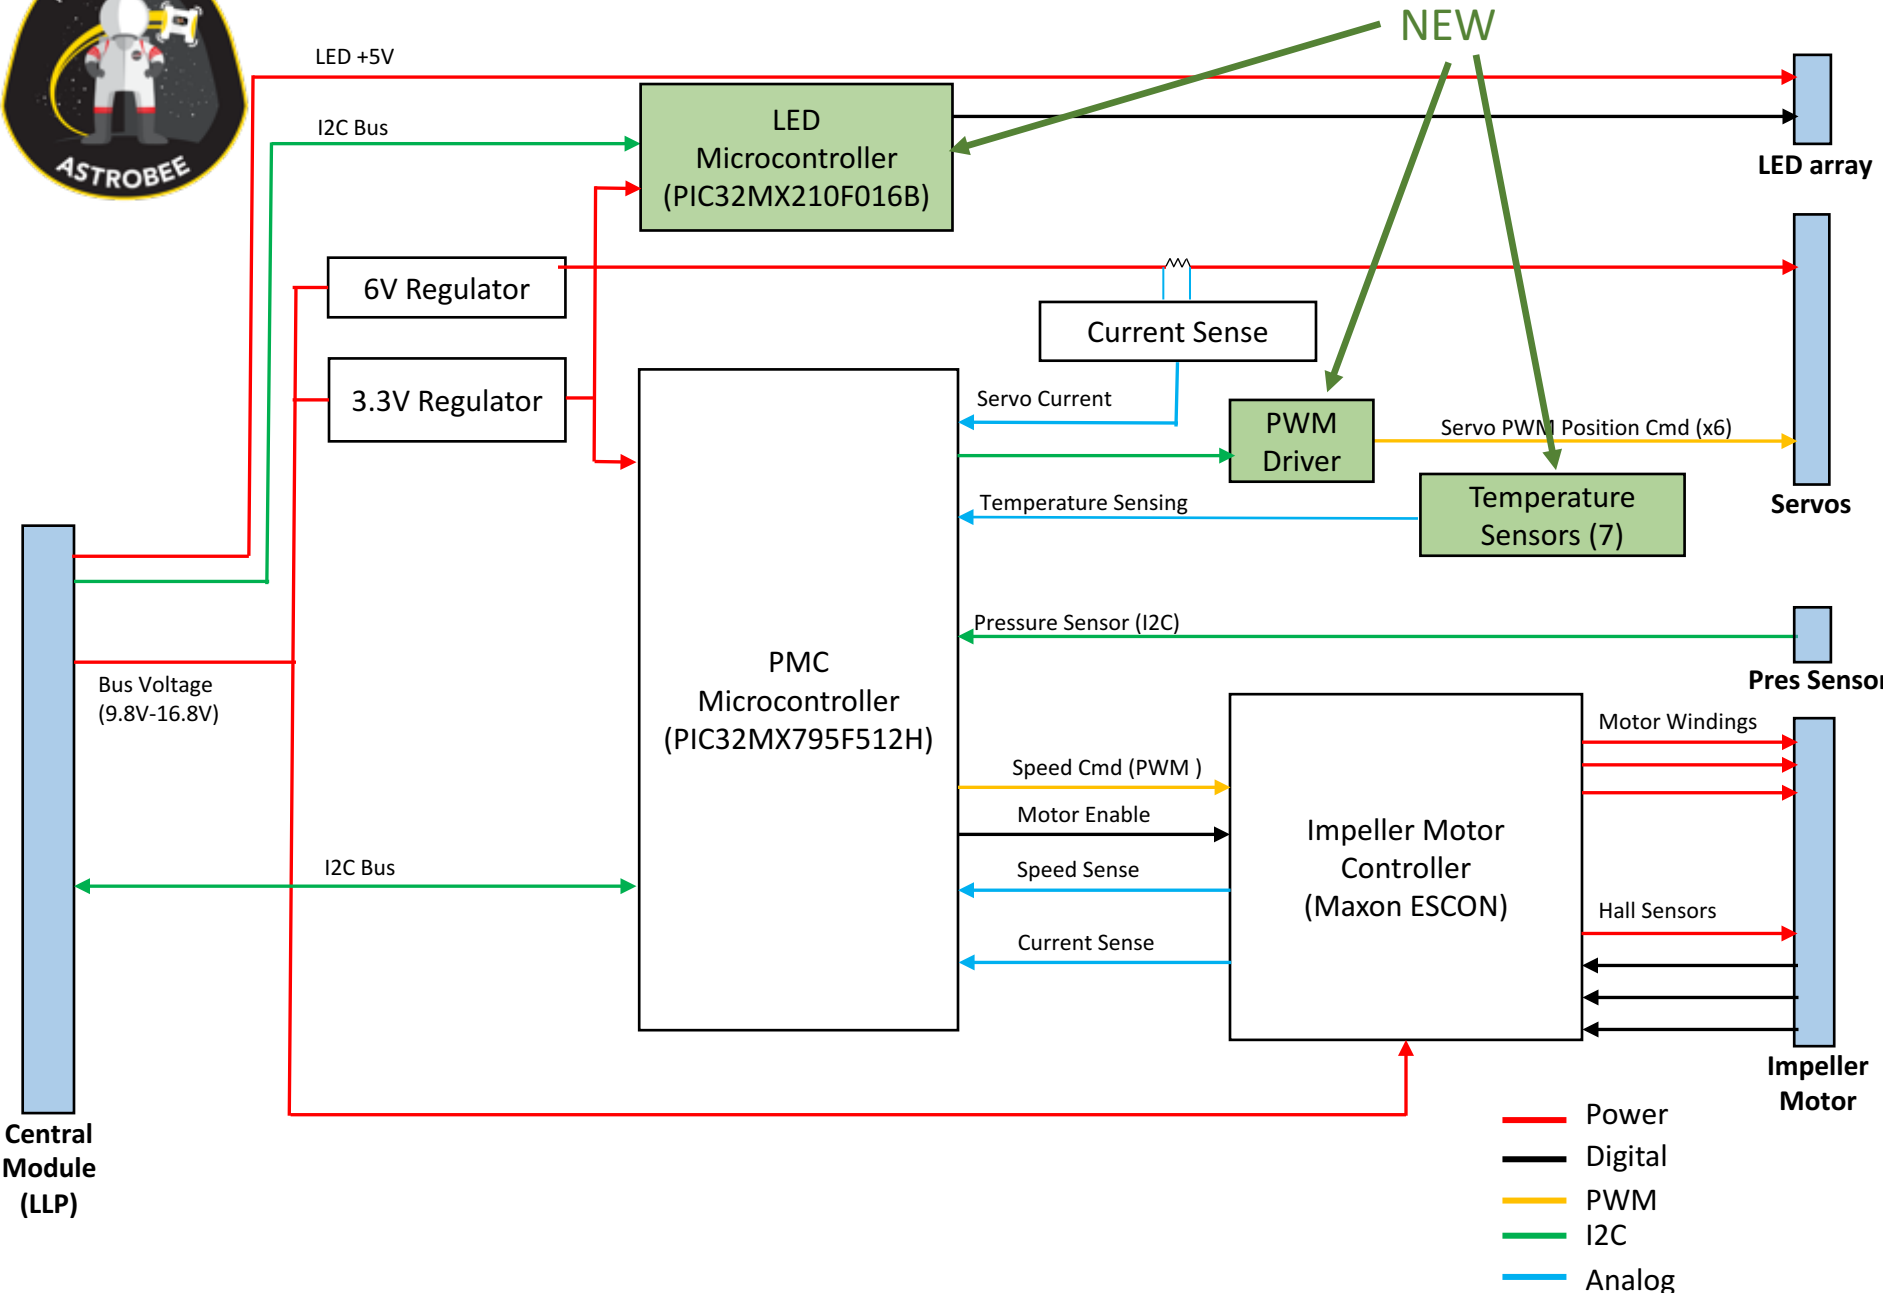



Propulsion

Software: PMC Functions

PMC Board Functions

1. Control impeller motor speed
2. Control nozzle servo motor positions
3. Mode management
4. Receive and execute commands from the LLP
5. Return telemetry to LLP
6. Read plenum pressure sensor
7. Read motor speed from motor controller
8. Read motor current from motor controller
9. (New) Read temps from 6 servos + impeller motor
10. Perform propulsion FM activities
11. (New) Control LED signal array




Propulsion Software

- Development environment
 - MPLAB X (v3.45)
 - XC32 Compiler (v1.42)
 - Harmony Configurator (v1.09)
- Programming
 - PMC/LED SW upload capability from ground
 - Updated via I2C Comm path
 - Directly to the PMC board via a mini-USB port
 - Motor controller firmware not to be updated on orbit



Performance

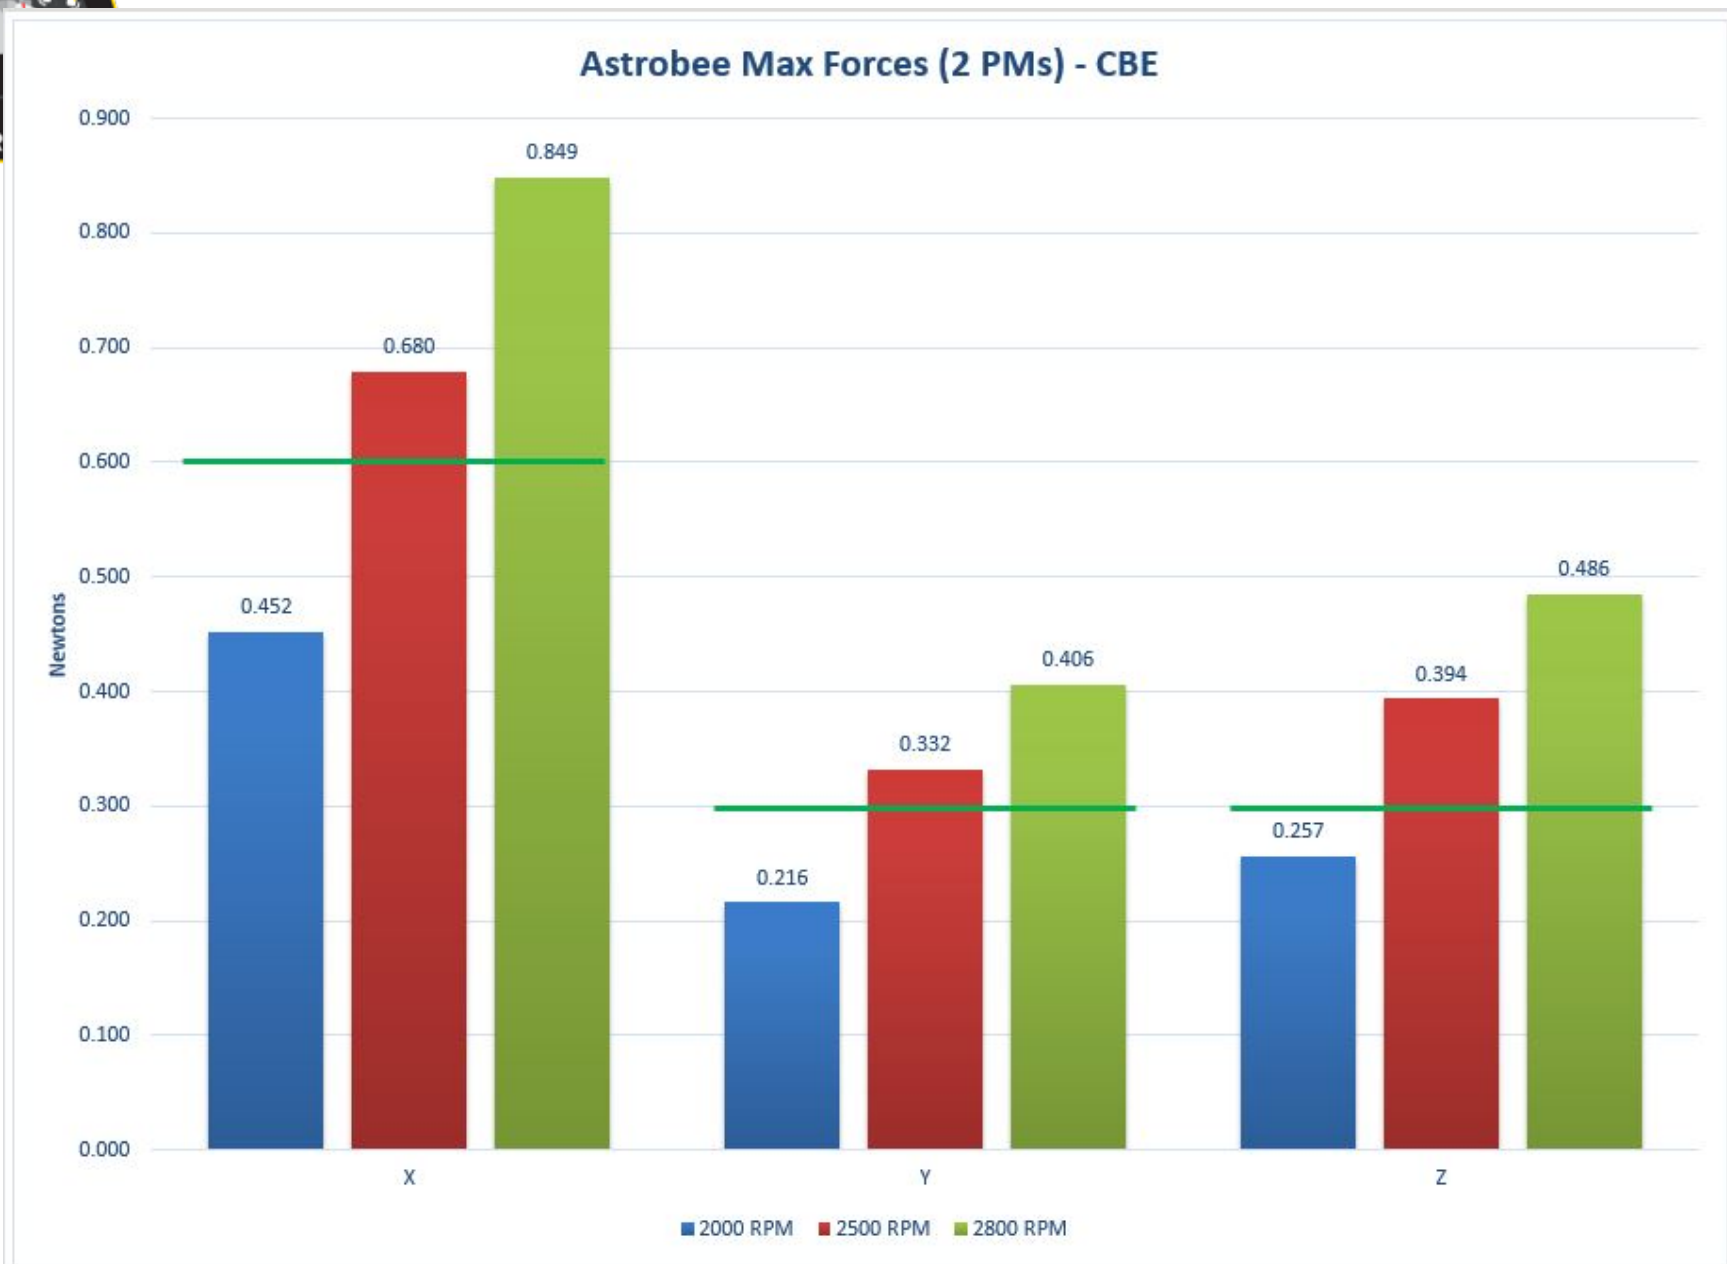

Astrobee CDH, EPS, & Sensors Subsystem



Design Overview



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

Component	Maturity / Risk	Forward Work
Backplane board	High / Low	HW payload over current
Data bus	High / Low	
Low level processor	High / Low	USB OTG support
Mid/High level processor	High / Low	Speaker+Mic, USB OTG support
Touchscreen	High / Med	Ribbon cable routing
Flashlights	High / Low	
Payload connector	High / Low	
Buttons/switches/LEDs	High / Low	
EPS	High / Low	HW over current, HW over temp
SpeedCam	Med / Low	More testing




New/Changes from PTR3

Component	New / Changes
EPS	<ul style="list-style-type: none">- HW current limit for payload power- HW over temperature protection- Improved battery charging
Backplane	<ul style="list-style-type: none">- HW current limit for payload power
MLP/HLP	<ul style="list-style-type: none">- Speaker and Microphone fix- Added Fastboot support- SMA connector for WiFi antenna- Additional mounting holes for heat sink
LLP	<ul style="list-style-type: none">- GPIO line to MLP & HLP volume for Fastboot
SpeedCam	<ul style="list-style-type: none">- Big redesign




Avionics Stack

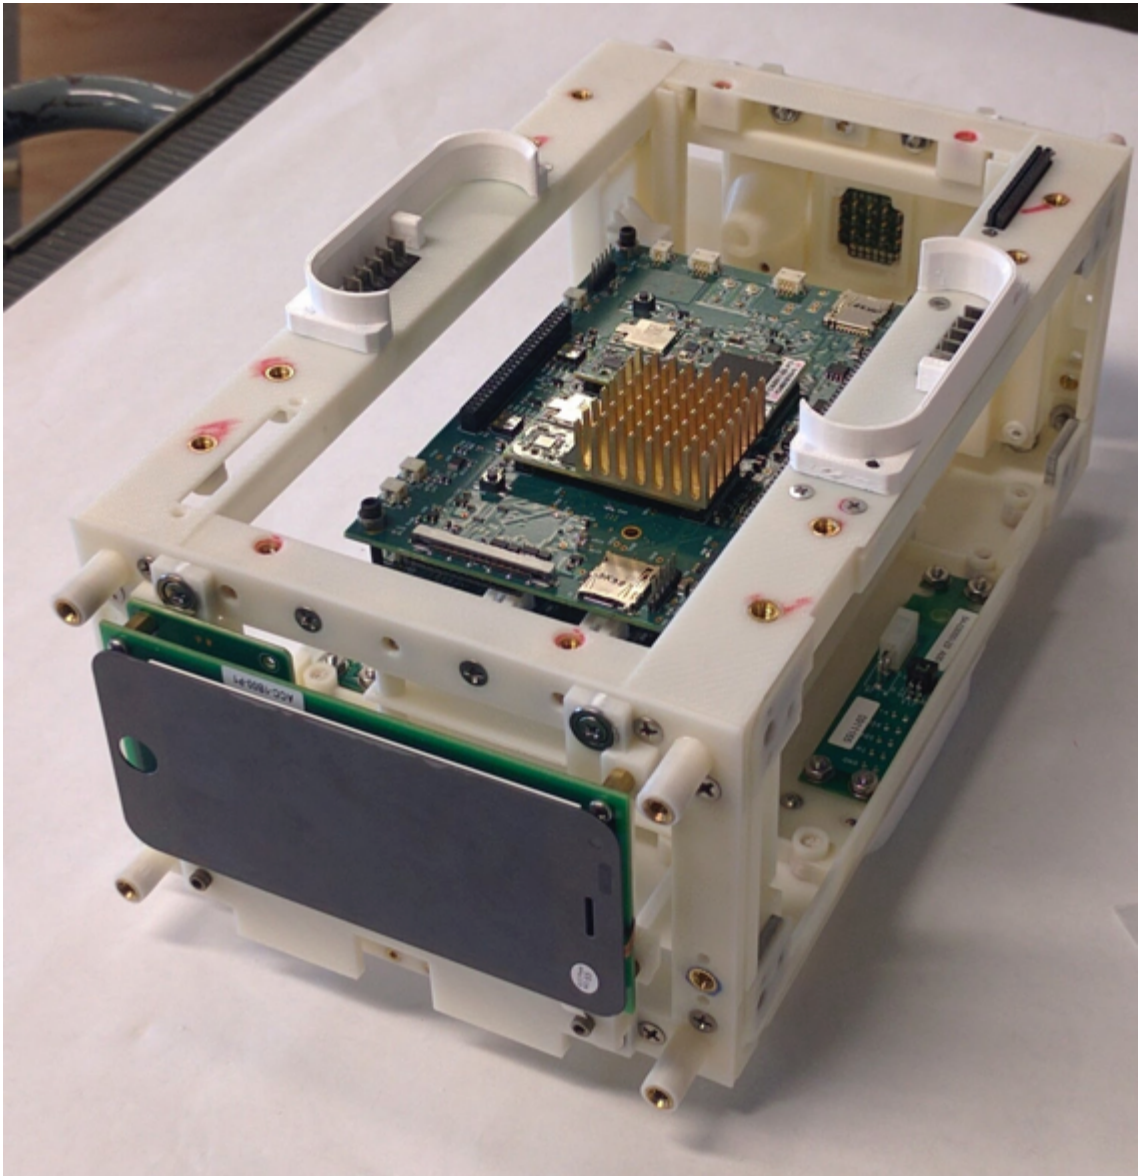




Avionics Stack

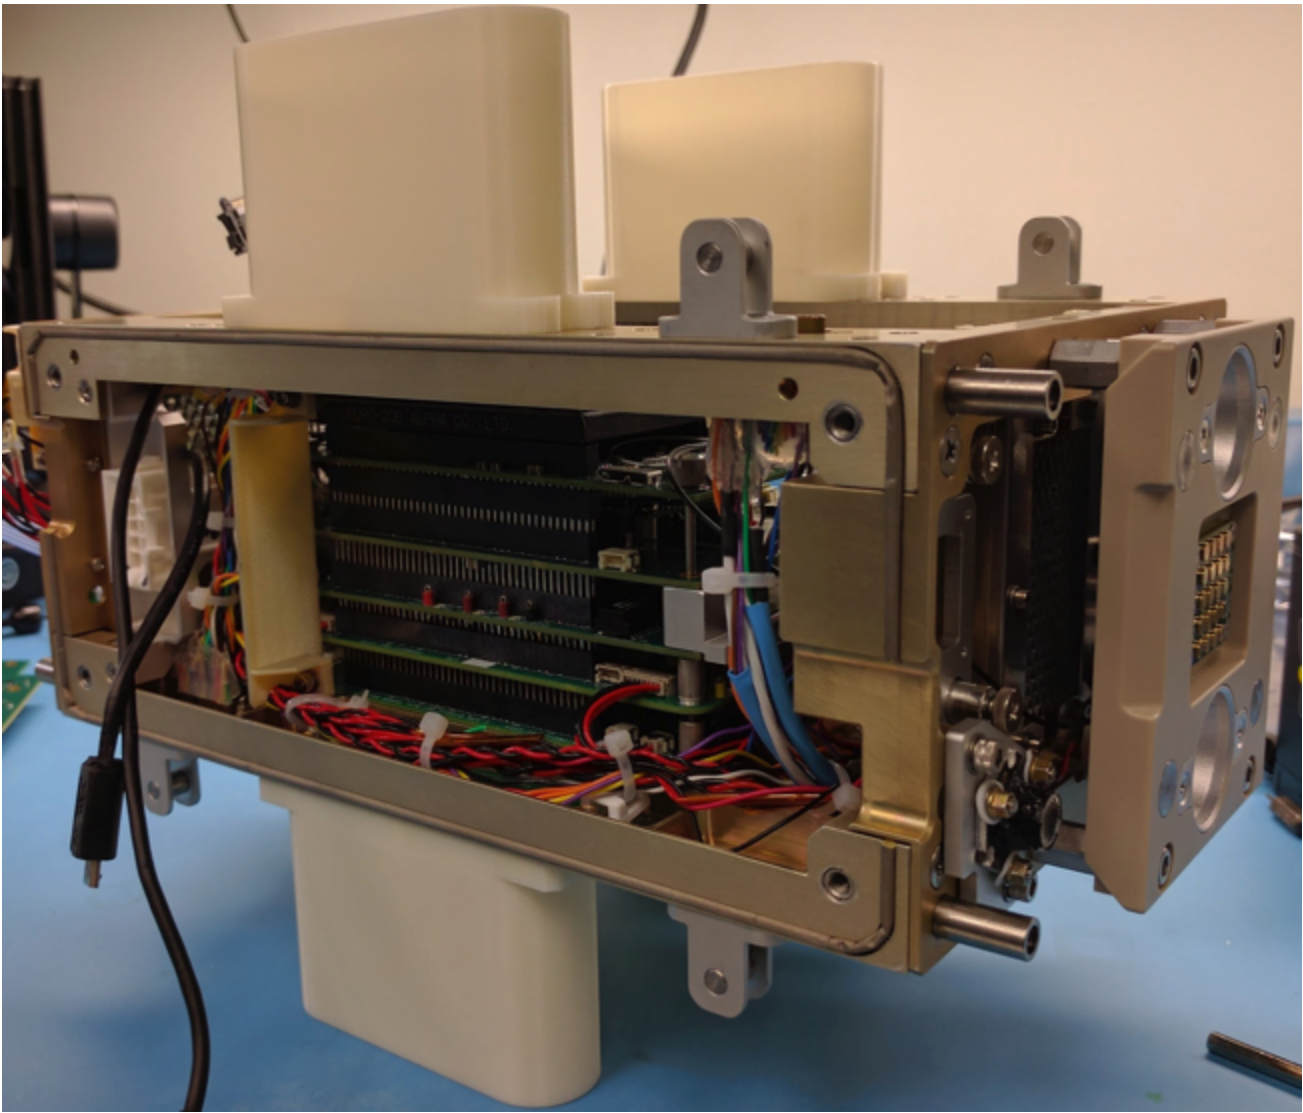



EPS Diagram

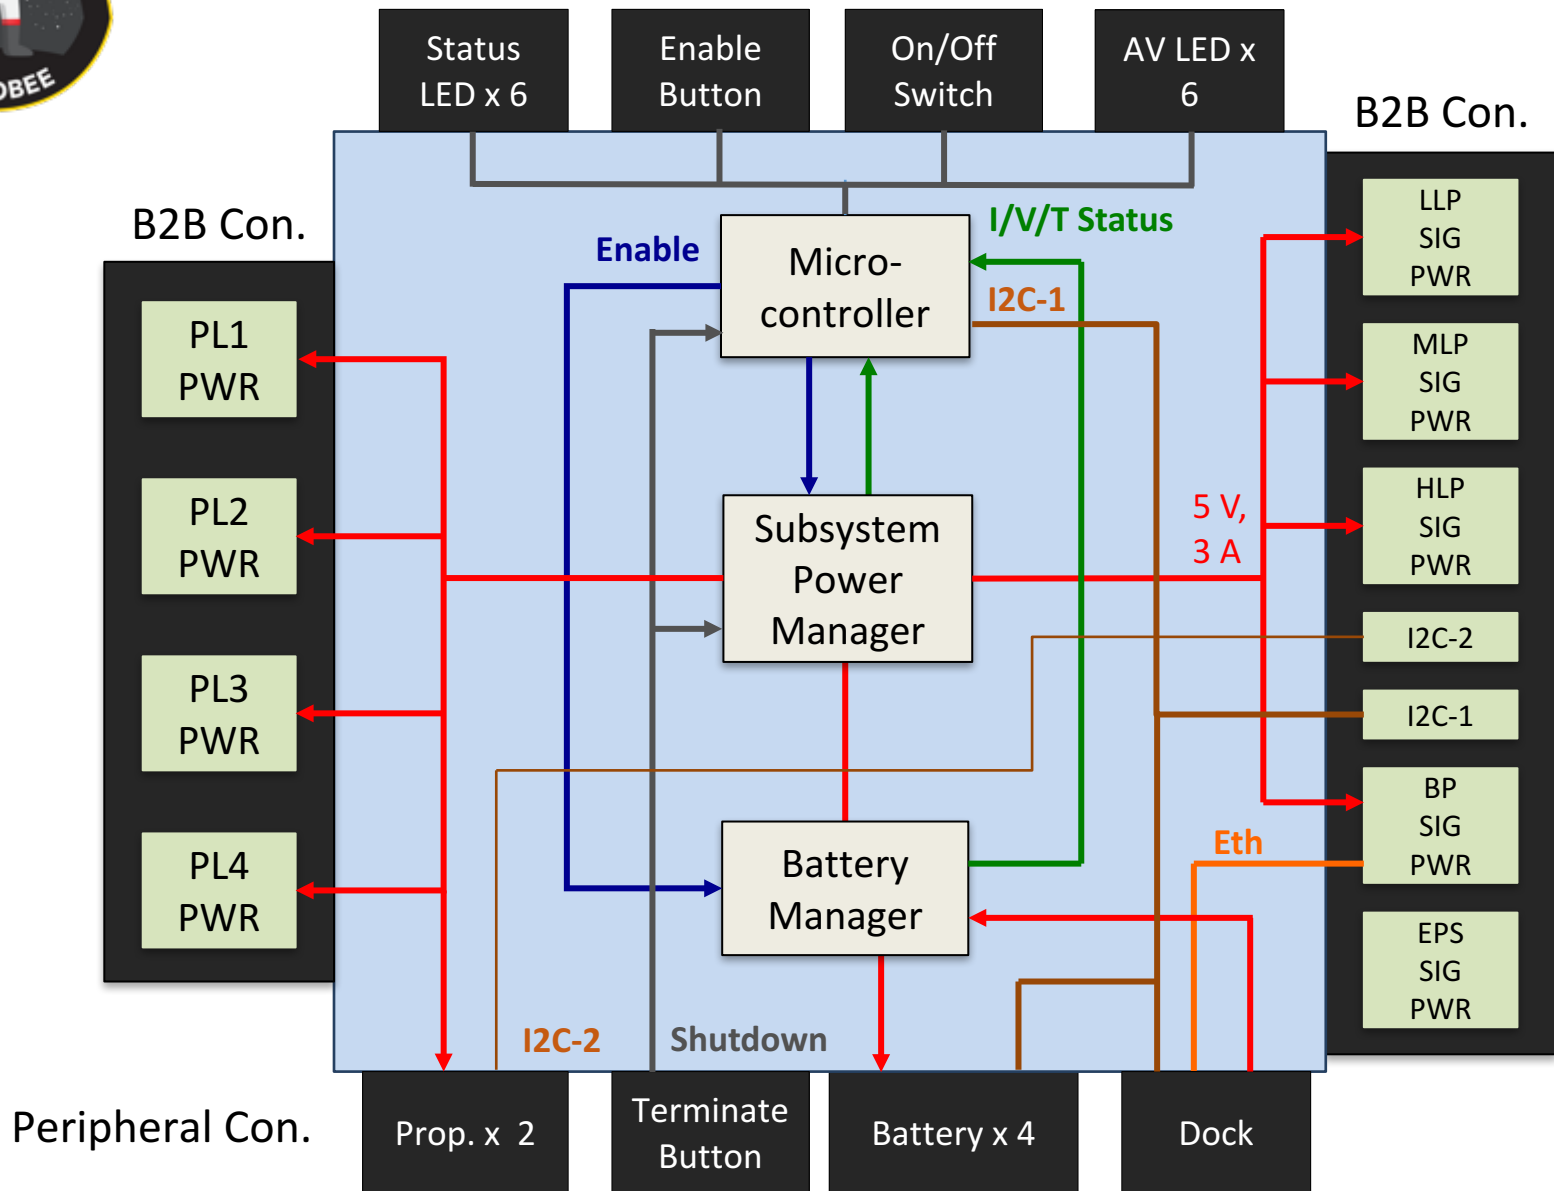




EPS

- HW over current protection
 - 4 Payloads
- HW over temperature protection
 - LLP
 - MLP
 - HLP
 - Flashlights
 - System
- Improved battery charging




EPS HW over current

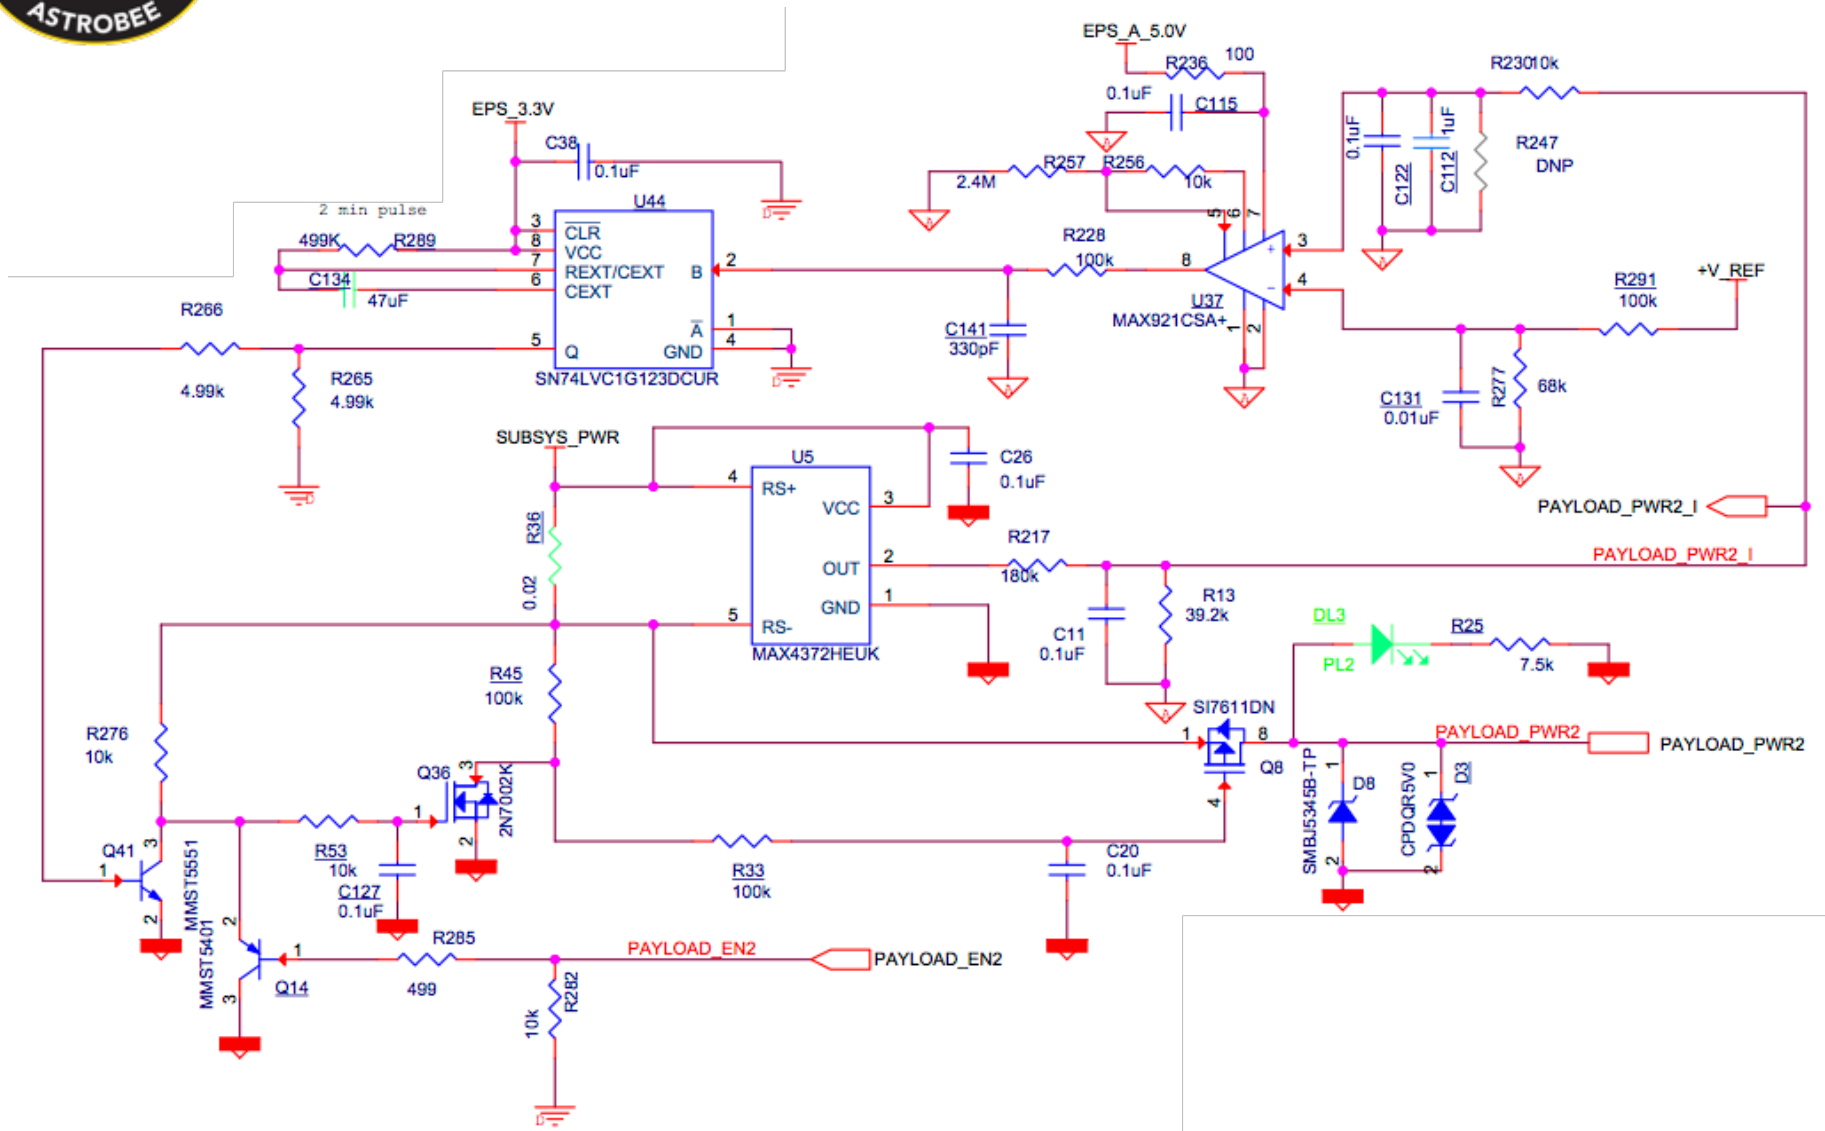




EPS HW over temperature

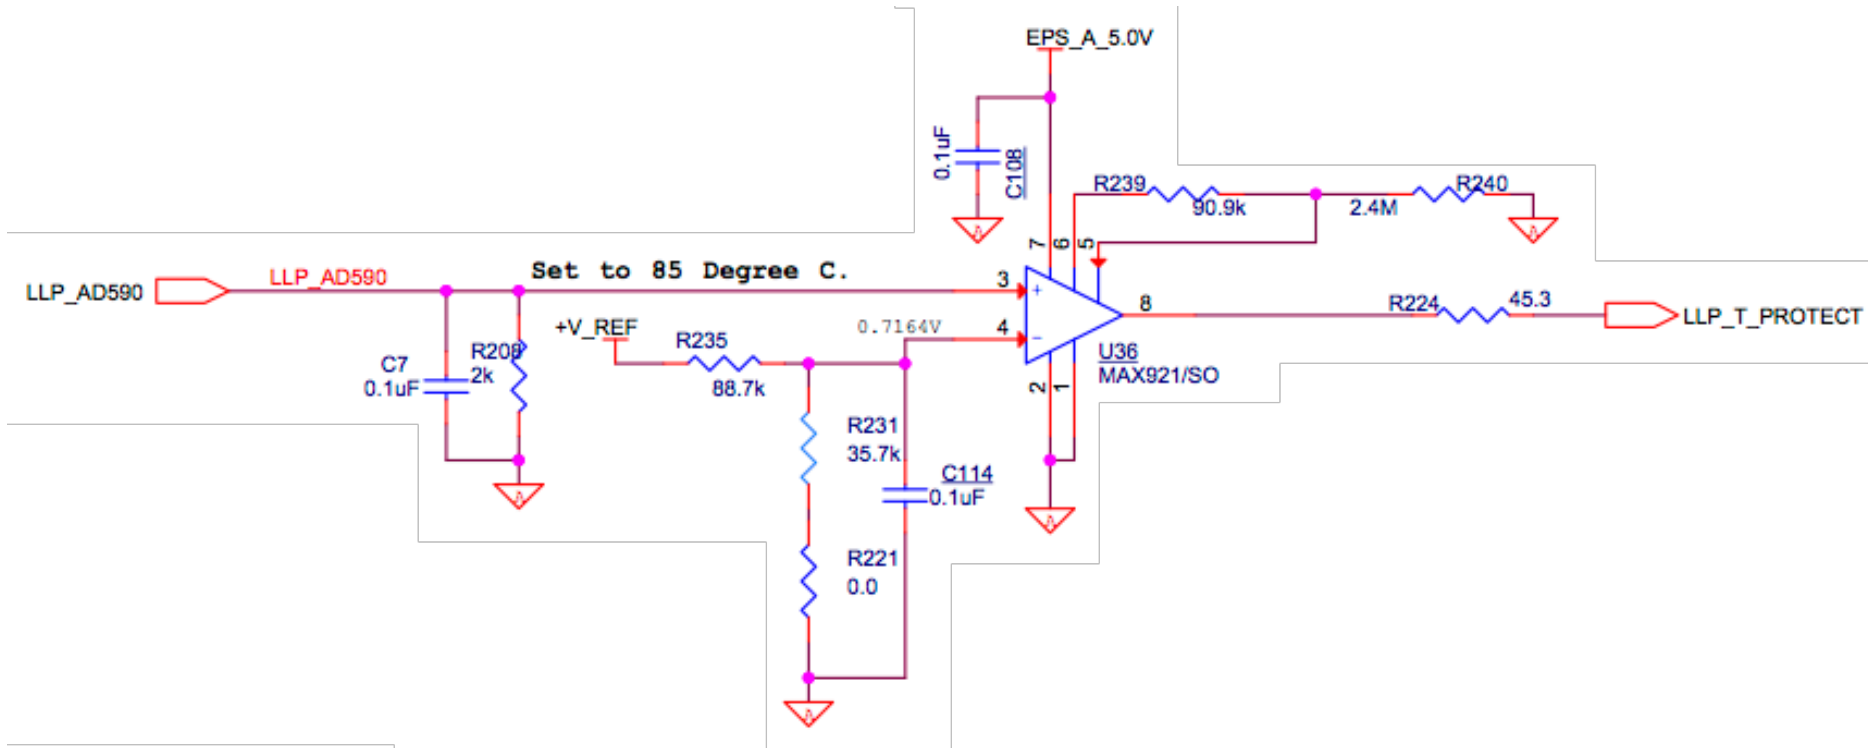




Avionics Diagram

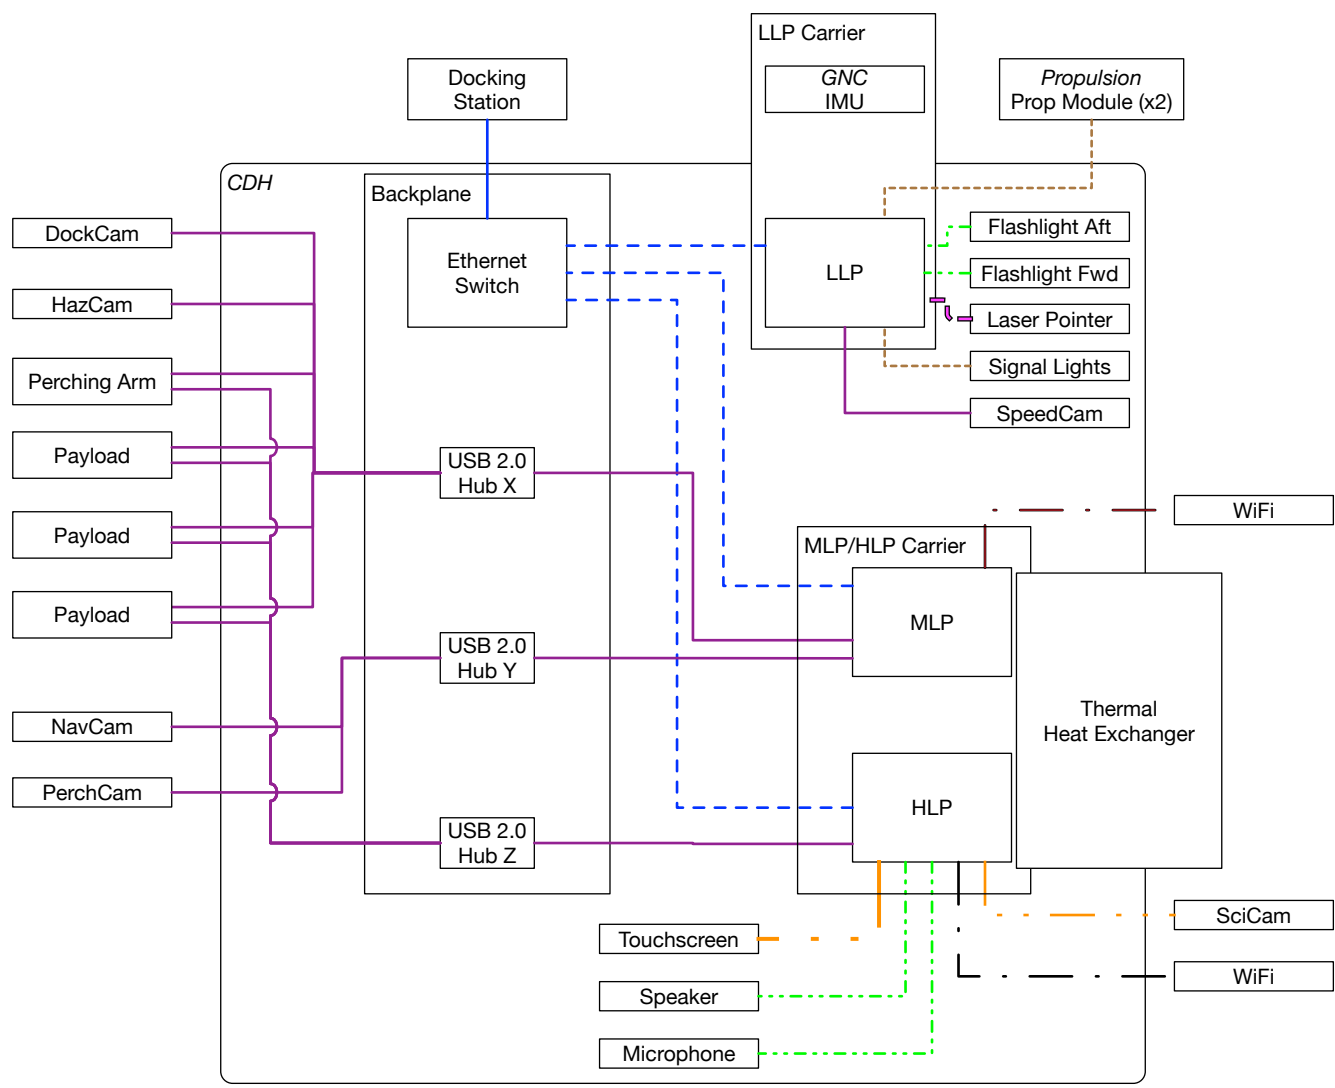




Backplane

- HW over current protection
- 4 Payloads

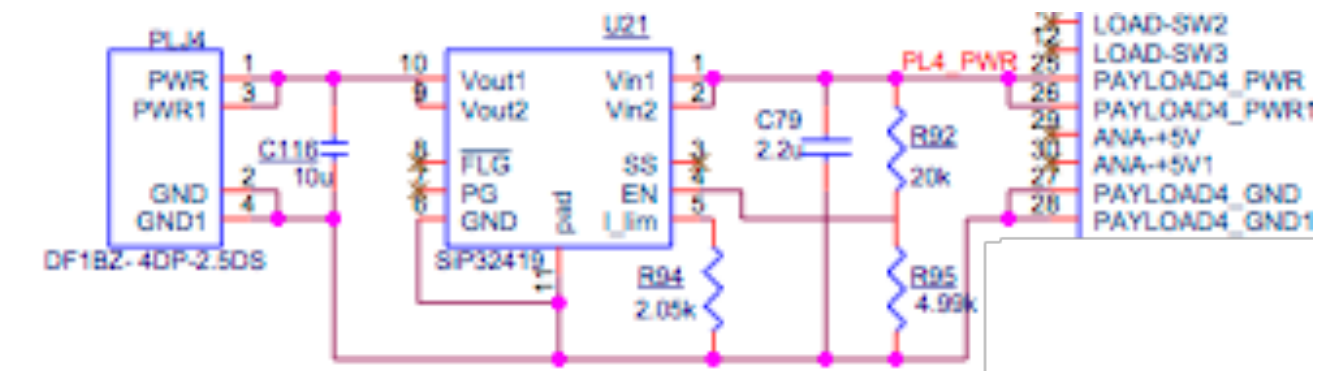

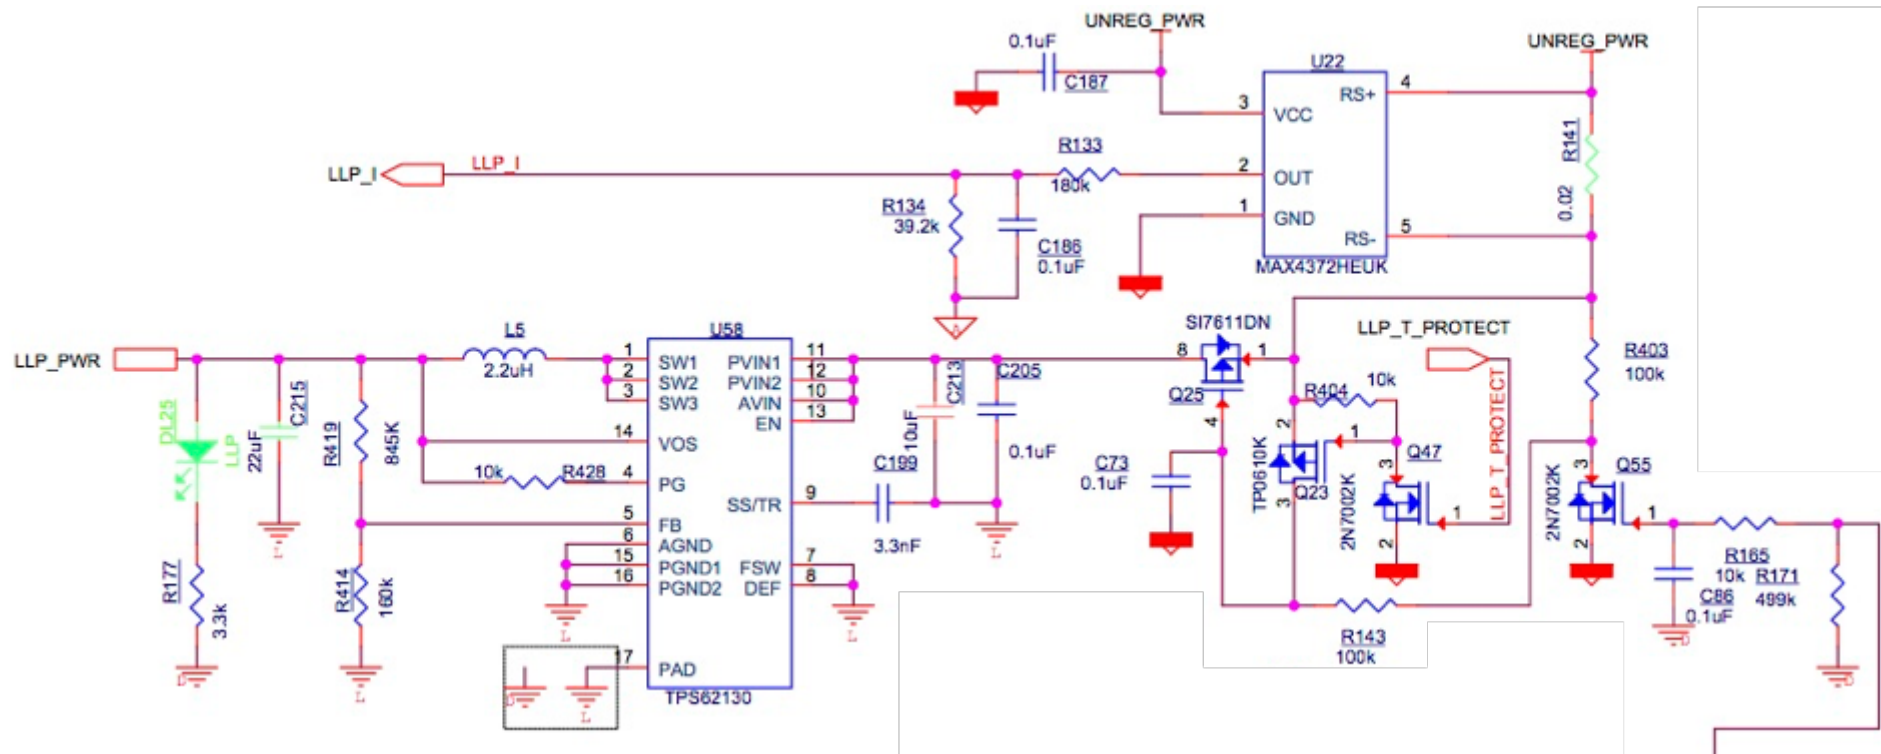




MLP+HLP Carrier

- Fix speaker and mic issues
- Added Fastboot support for MLP and HLP
- Changed Wifi antenna connector
- Added more mounting holes for heat sink



MLP+HLP Carrier

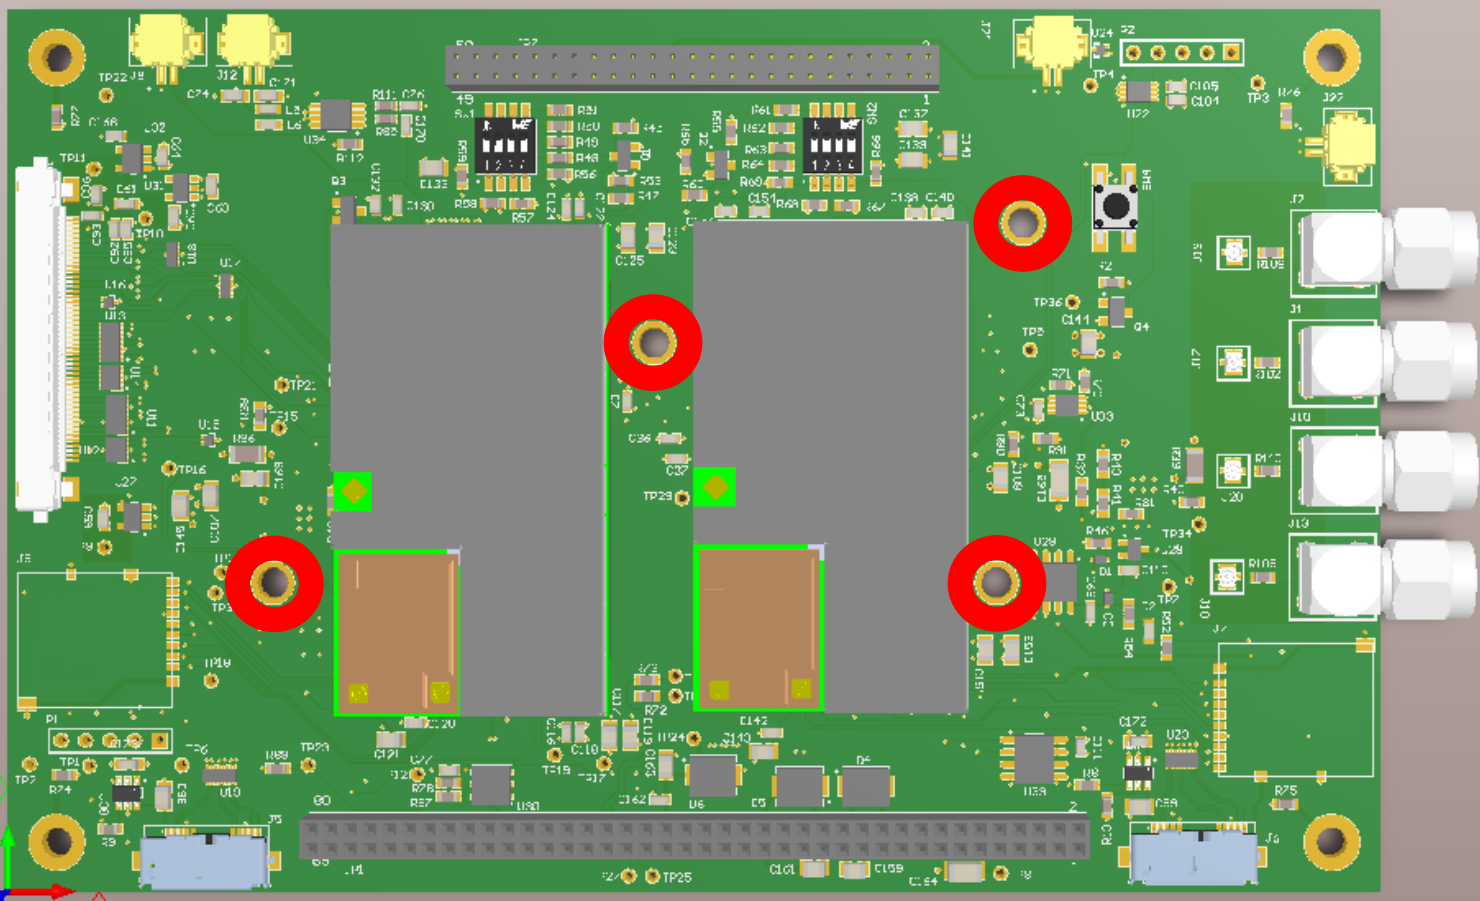




Payload Bay Connector



- 31 pin D-sub connector
- V_{batt} , GND
- USB 2.0
- More robust
- Premade harness
- Male side on Astrobee



Payload Bay Connector

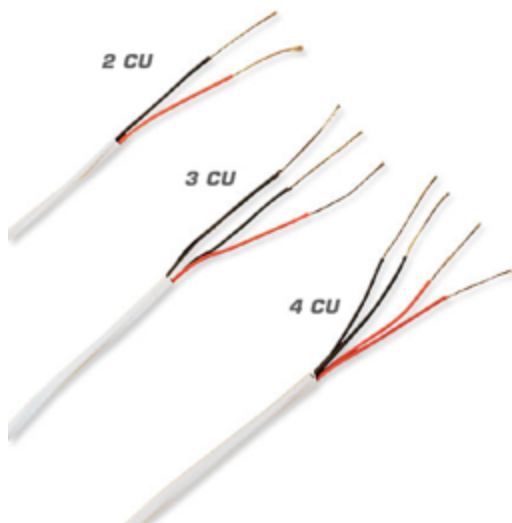

- Pre-twisted pair cable for:
 - USB data
 - Ethernet
 - Power
- Reduces wire bundle size



SpeedCam

PX4Flow



30 deg FoV lens



Accelerometer





TeraRanger



New Firmware





Astrobee SpeedCam!

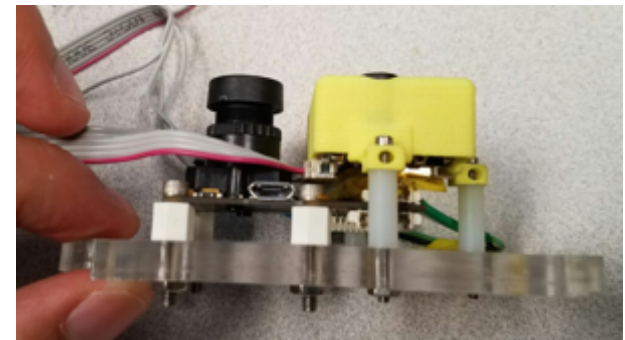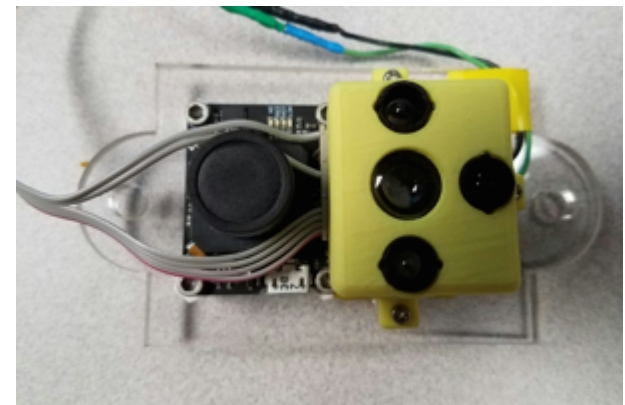



SpeedCam

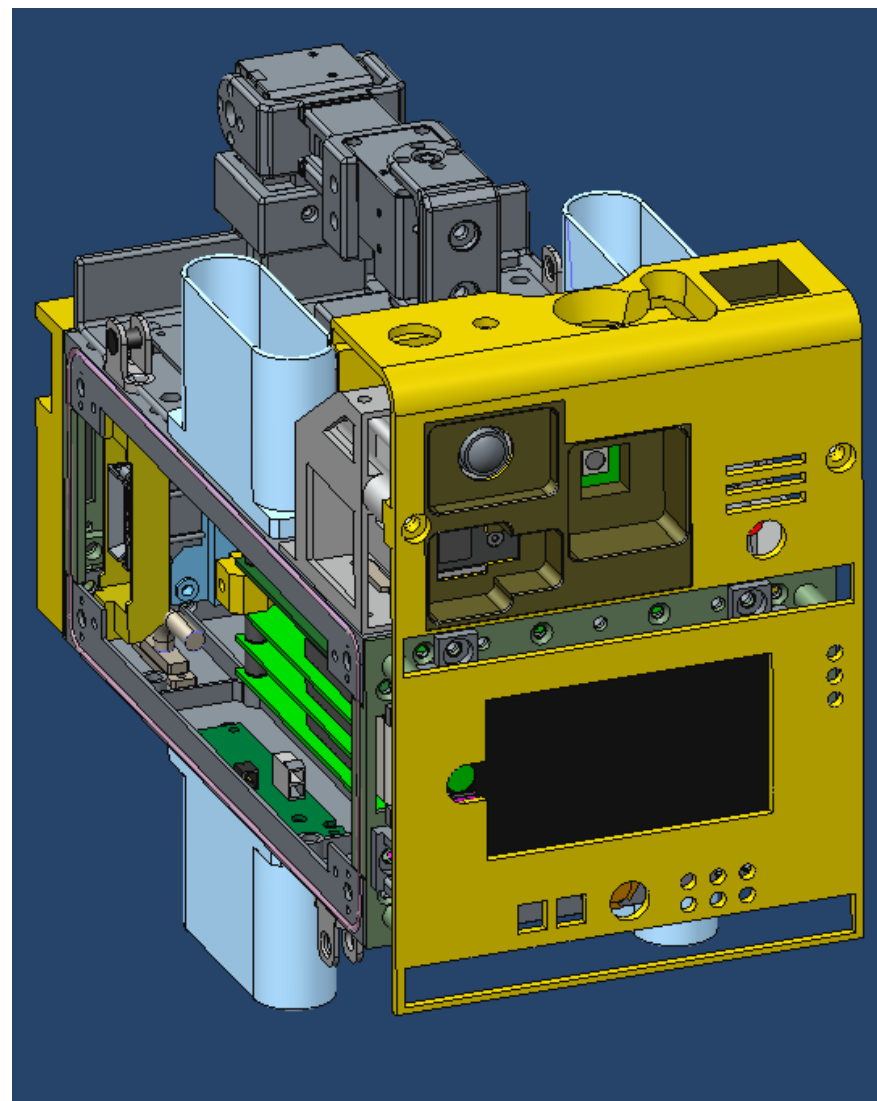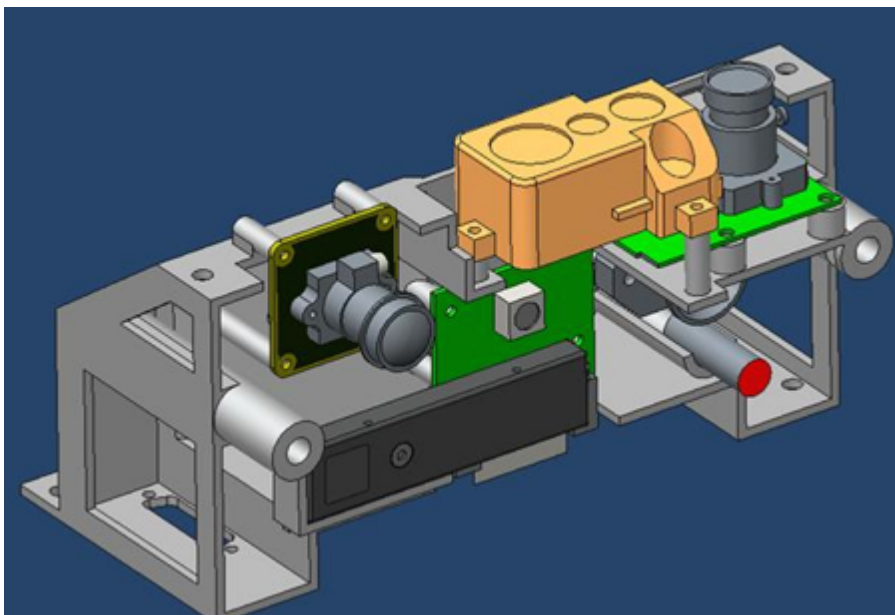





Test Setup I





Result I

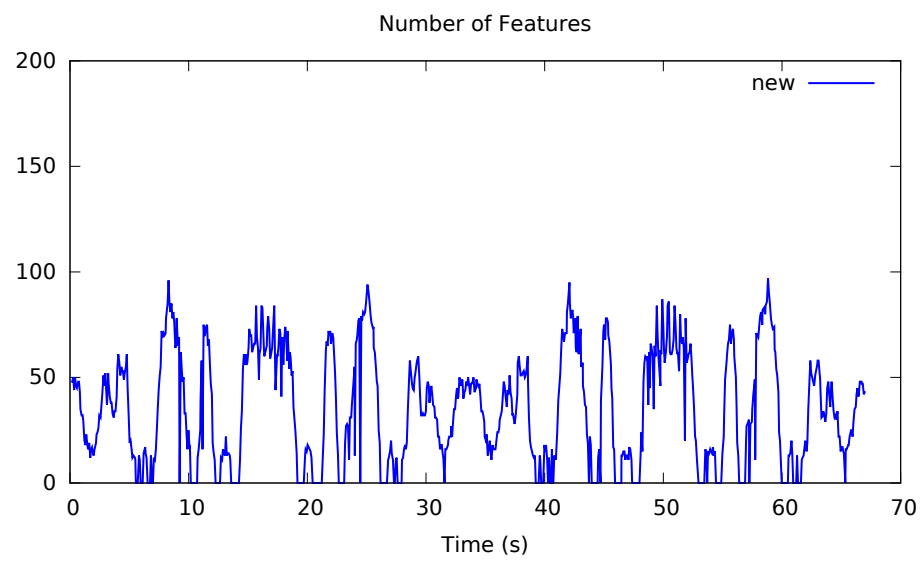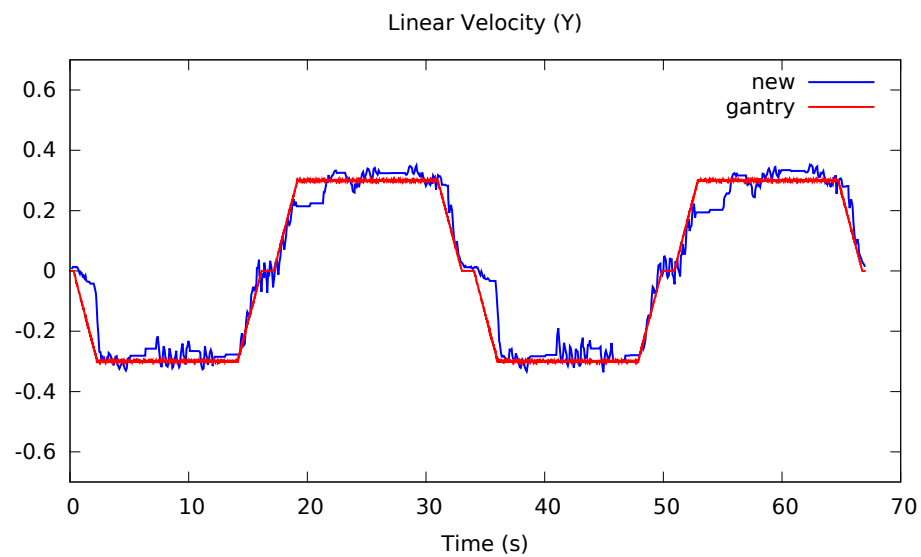



ISS is Messy







Test Setup II





Result II

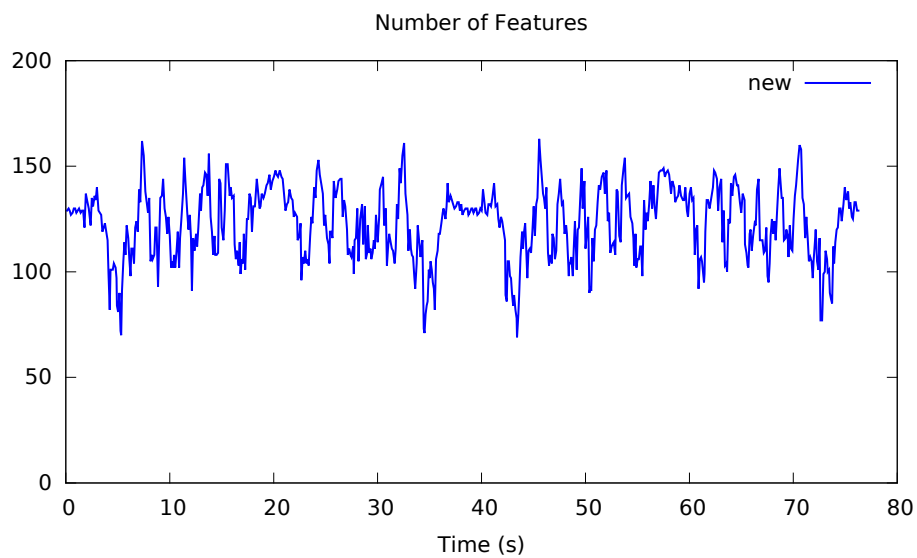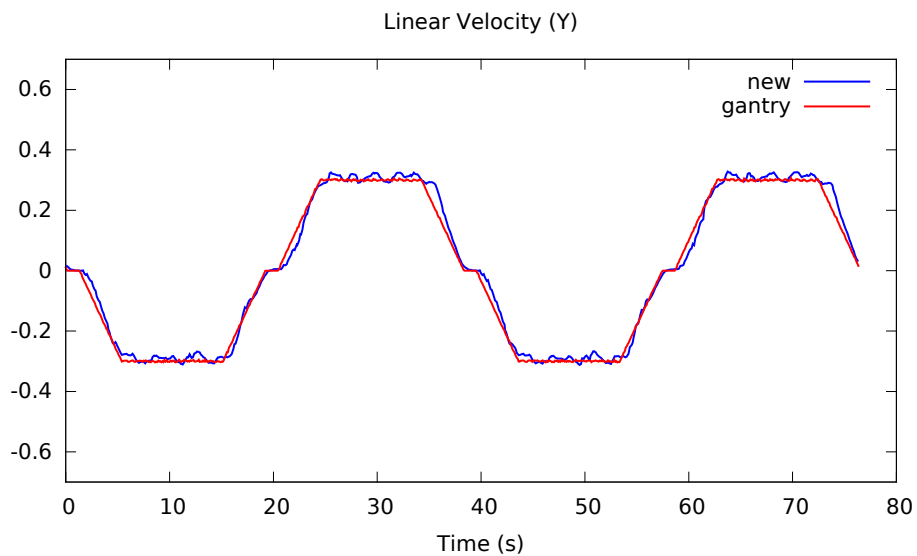

Astrobee Comms Subsystem



Design Overview



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.

Component	Maturity / Risk	Forward Work
Antenna	High / Low	
Network Configuration	High / Med	
Data Transfer	High / Med	
DDS Routing Service	High / Med	
Video Multicasting	Med / Med	



New/Changes from PTR3

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.


All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.

Component	New / Changes
Overall Design	Added Dock CPU. Add HOSC relay.
Antenna	Changed in-line connector. Changed location of antennas.
Telemetry/Video	Added data relay through the HOSC.
Engineering Tools	Updated diagram.
S/W Updates	Use Dock CPU instead of NAS for updates.



Block Diagram

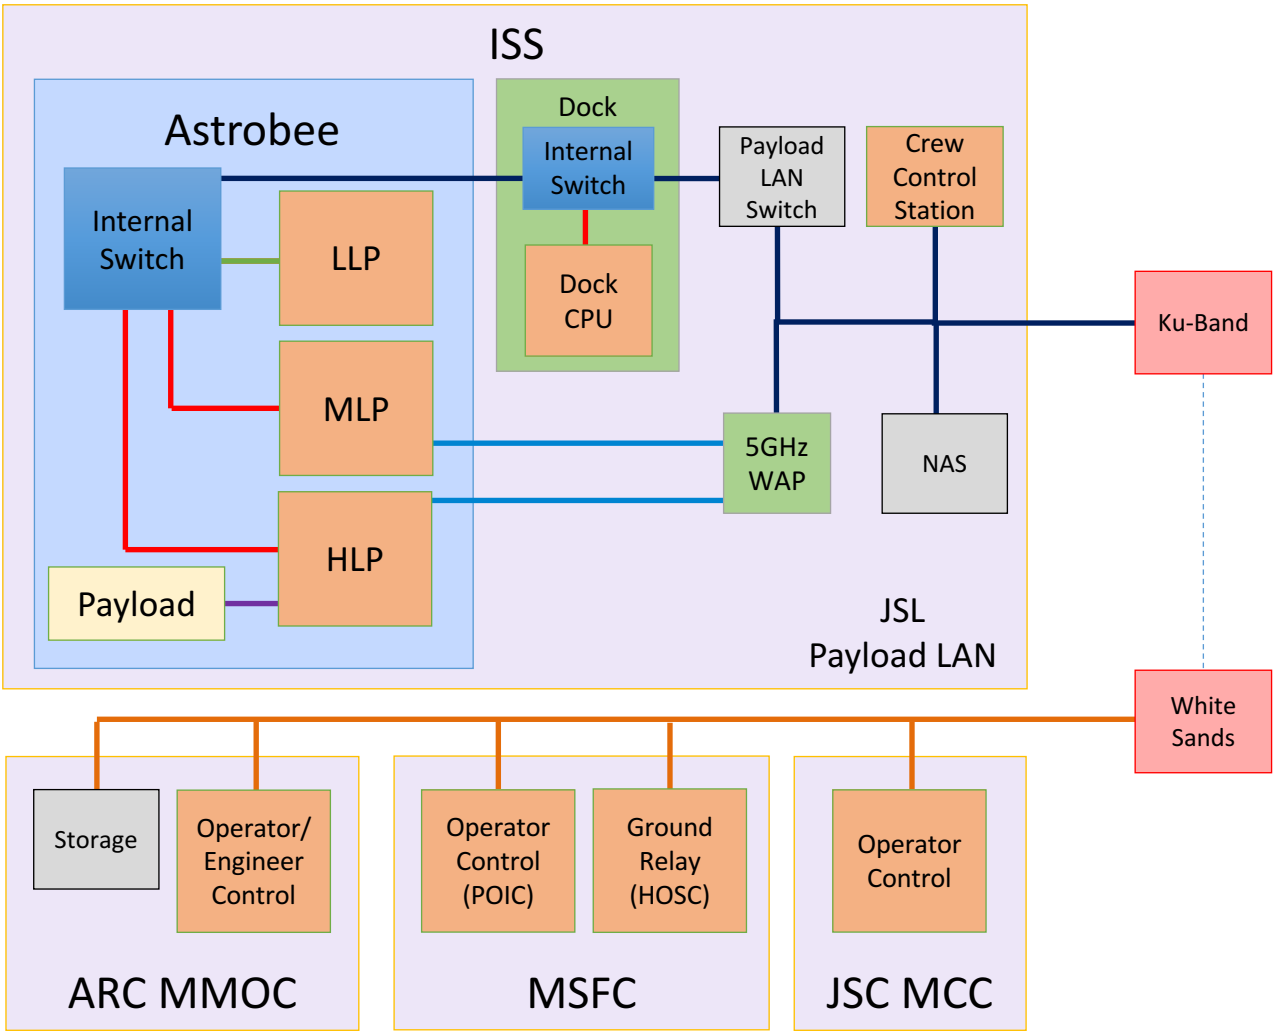

Link Legend

- Ethernet/LAN
- Ethernet: Internal IP
- Ethernet: Internal and Payload LAN
- WiFi: Payload LAN
- USB
- Other/LAN



Ground Data Relay

- For conserving bandwidth, only one stream of data & video will flow to the ground per robot. Data is relayed to multiple ground stations via a “relay” at MSFC HOSC.
- A computer at the HOSC routes DDS and streaming video traffic from ISS KUIP to interested ground nodes.
 - It will use COTS software, with custom configuration files. The configuration files will be under version control at Ames.
 - The DDS data relay has been tested at Ames.




Data Paths Overview

- All data paths to the ground make use of KU-IP Services and TReK.
 - TReK HPEG: Allows us to control our payload outside of the HOSC via “proxy” IP addresses.
 - TReK CFDP: File delivery protocol based on CCSDS.




Data Path: Telemetry & Video

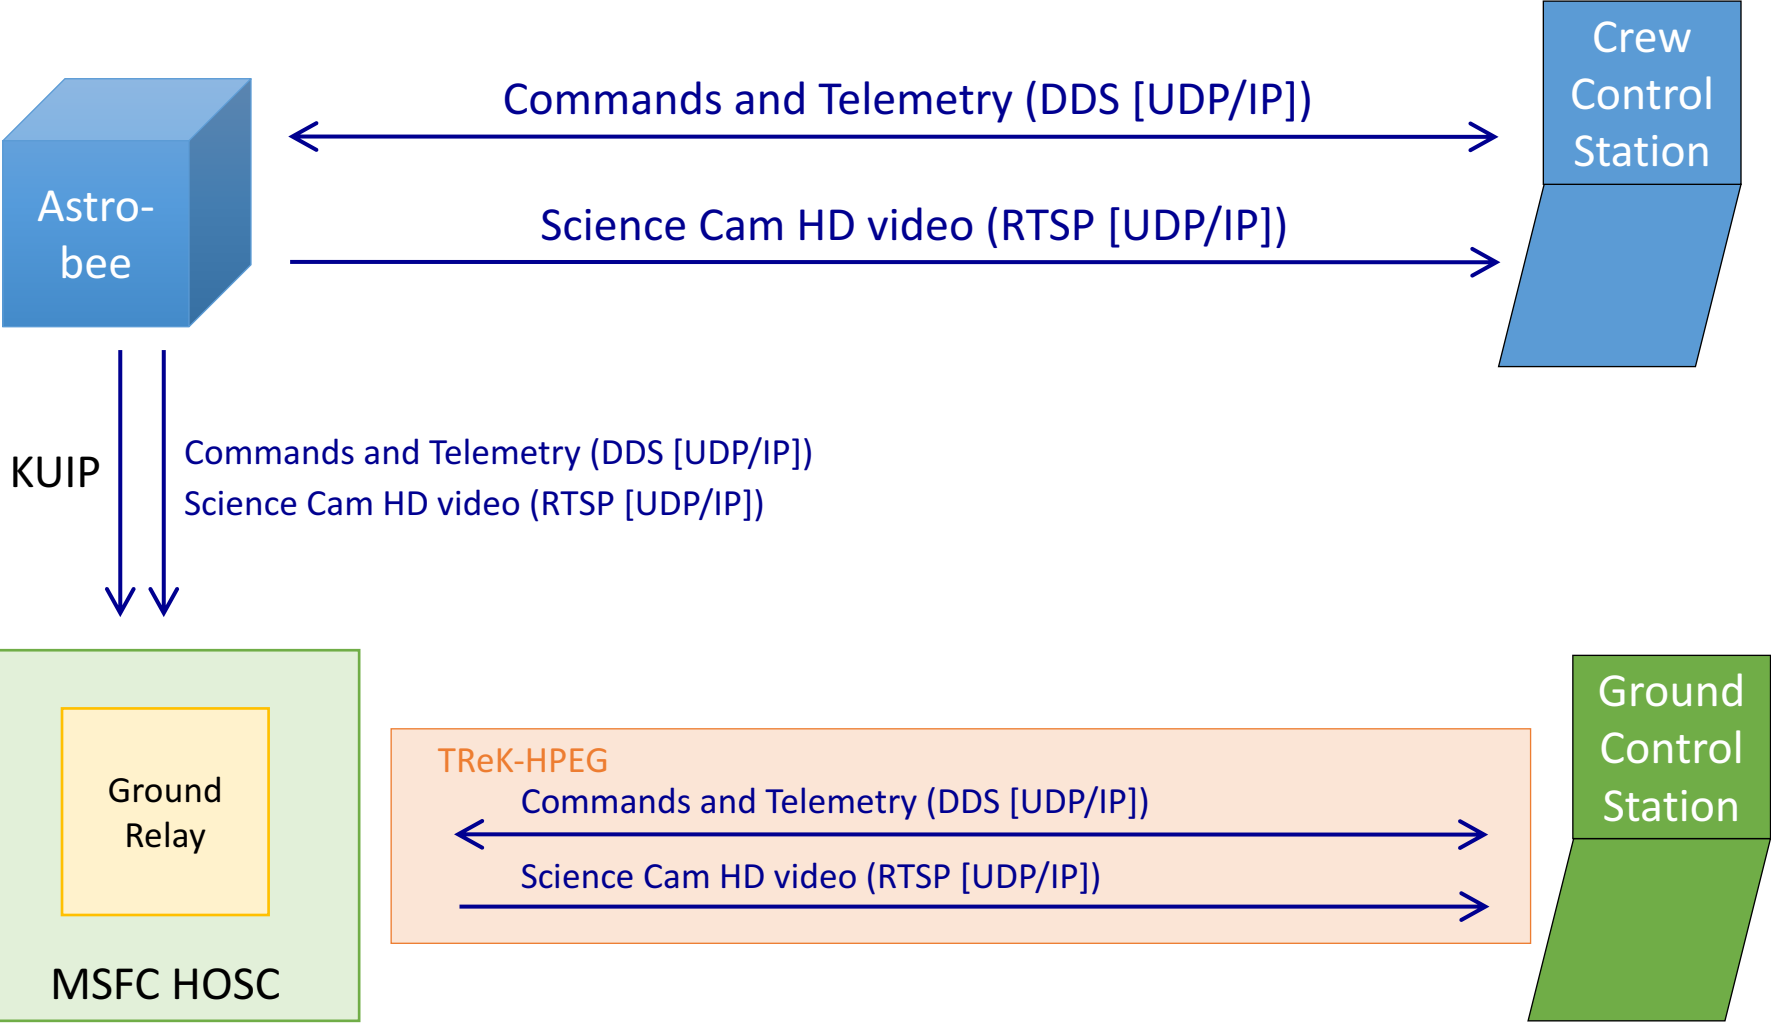





Data Path: Video/Data Distribution

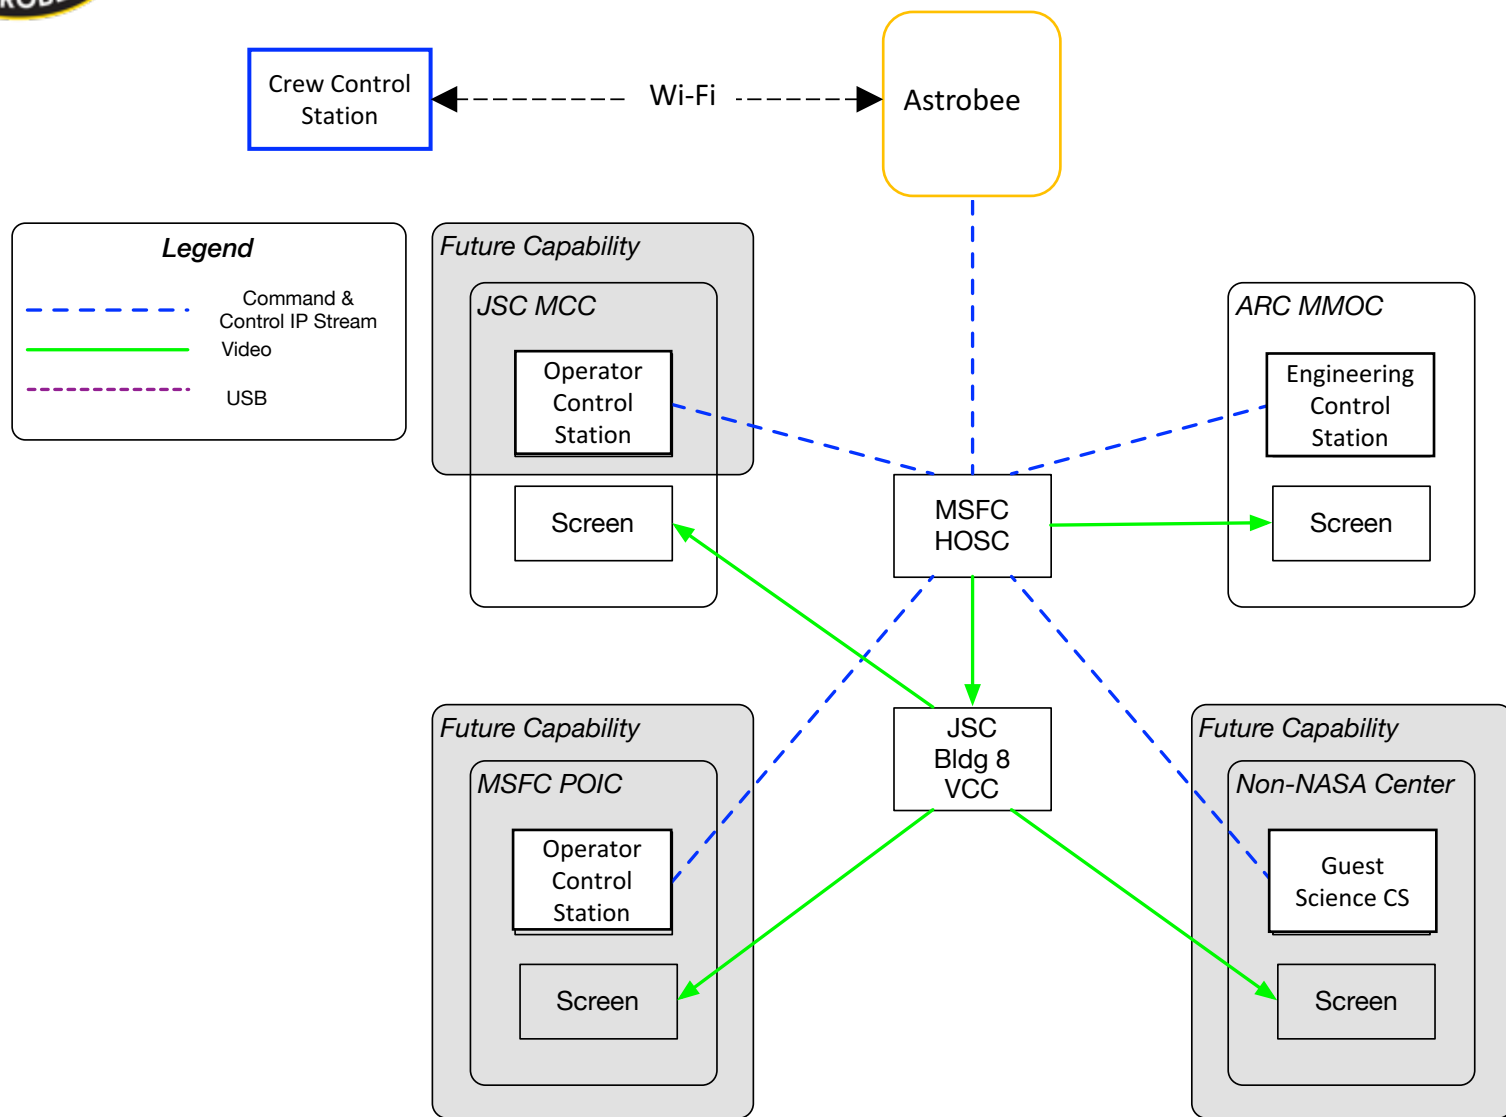




Data Path: Engineering Tools

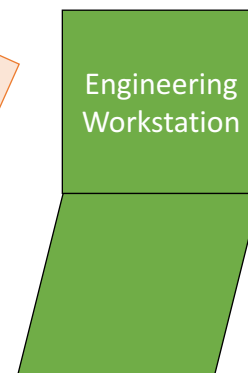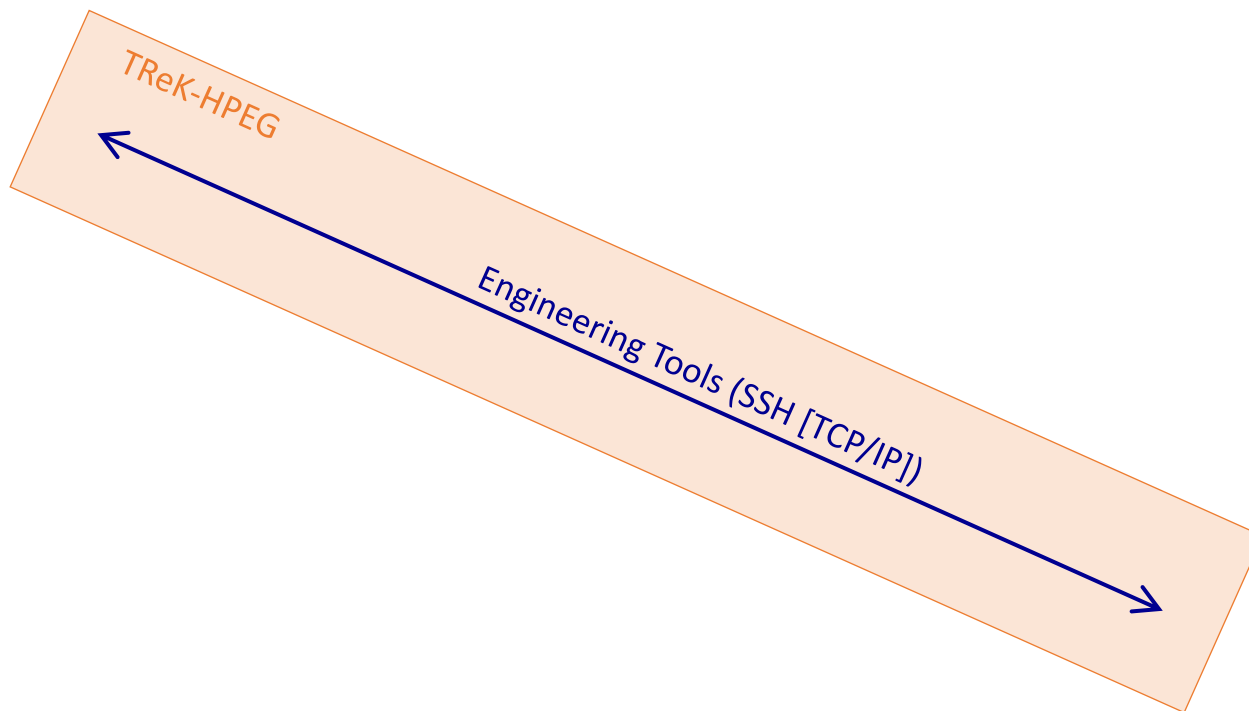



Data Flow: SW Updates, etc

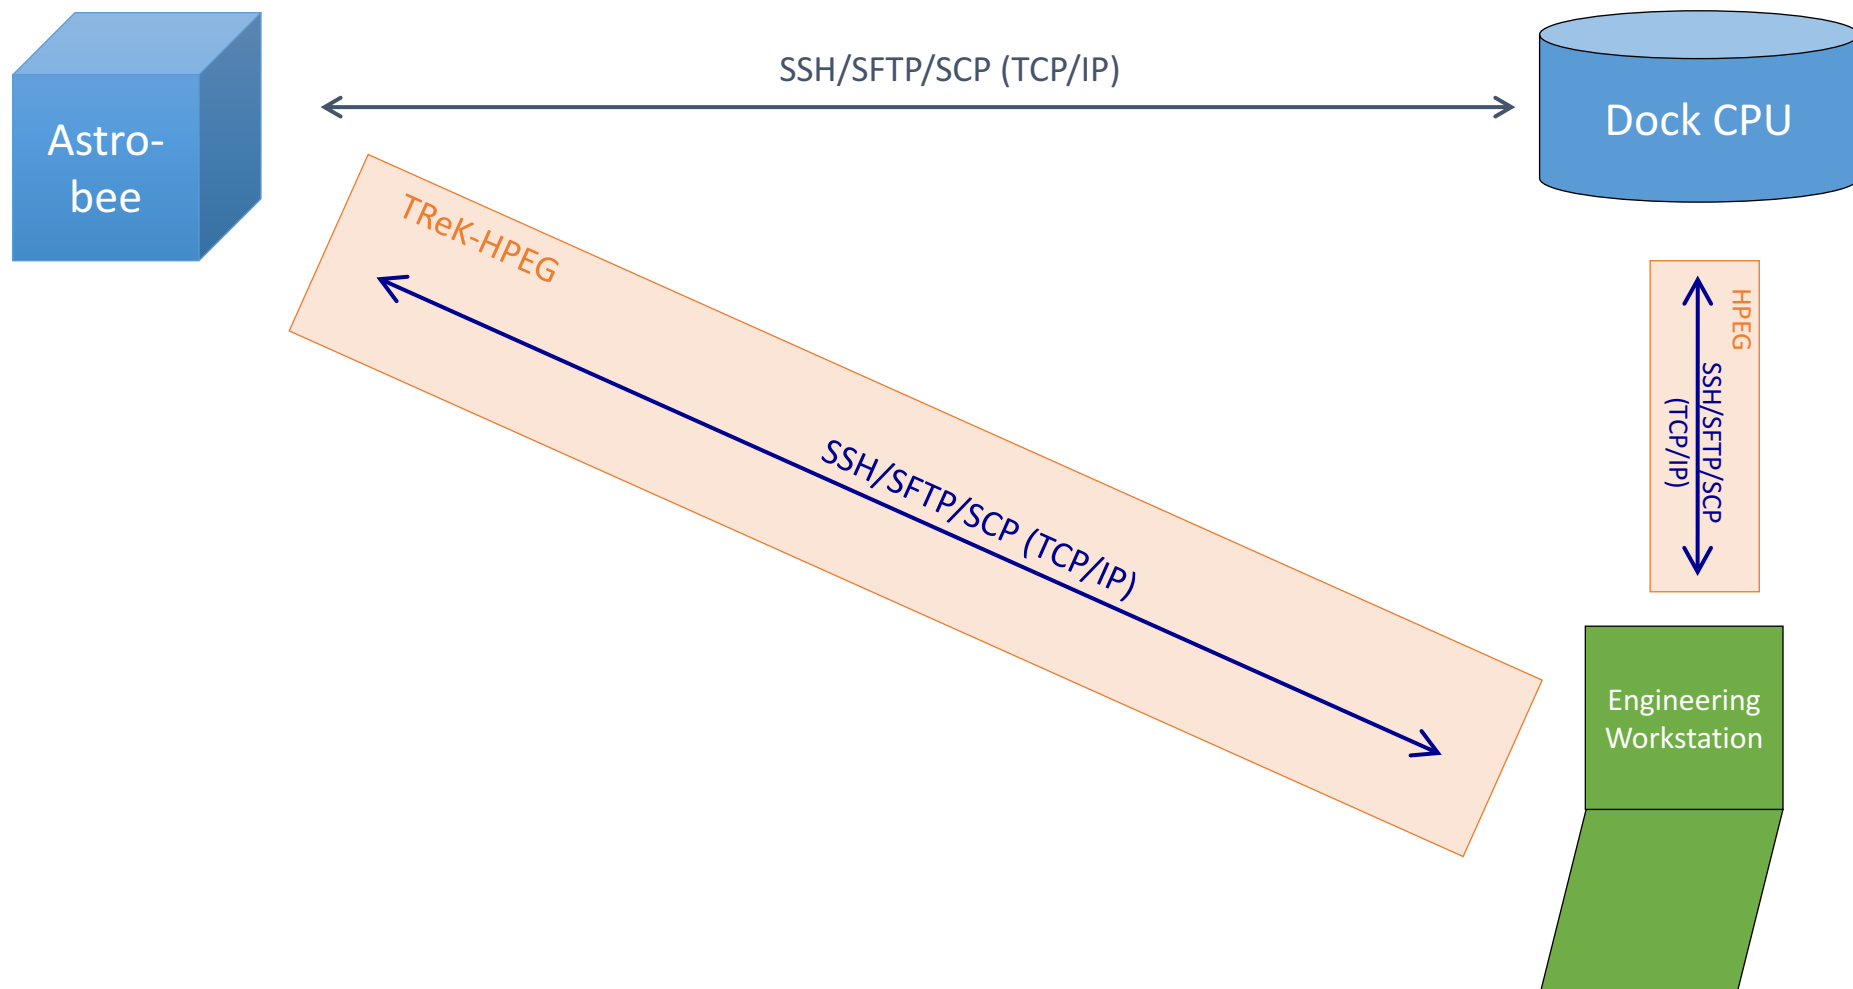





WiFi Antenna



- 2.4 GHz/5.8 GHz Wifi antenna
- ~3dBi/5dBi gain
- Omnidirectional
- Adhesive tape mounting
 - Additional tape will be applied to ensure launch survival
- Paper thin
- Mass: 0.477g







Antenna Placement - Front

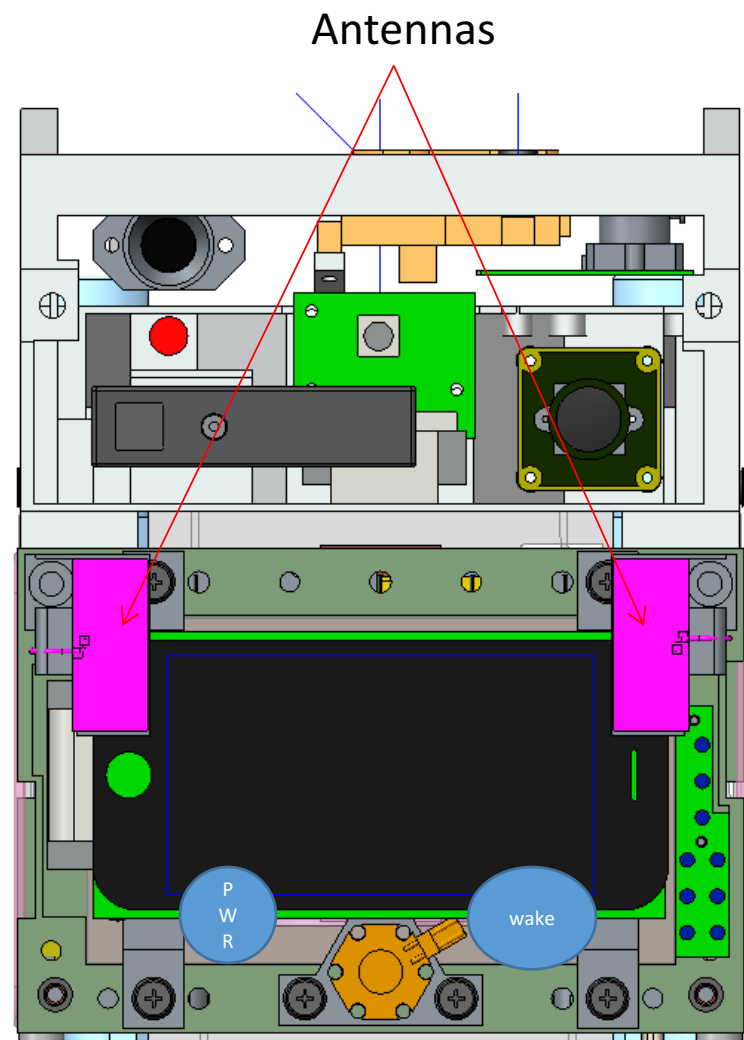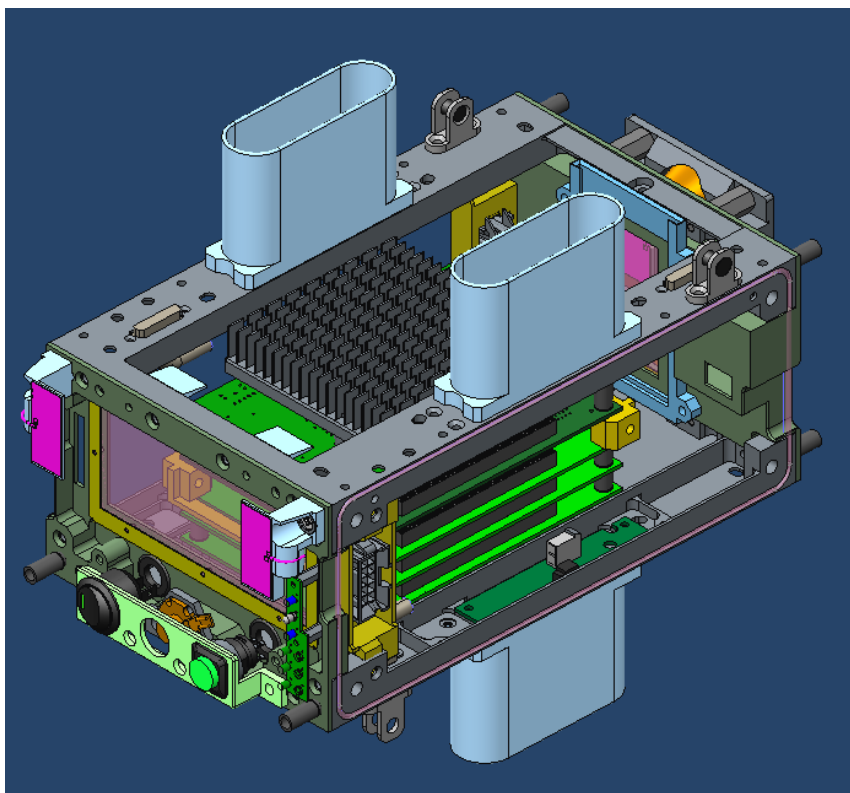



Antenna Placement - Aft

Antennas are on backside of Dock Adapter

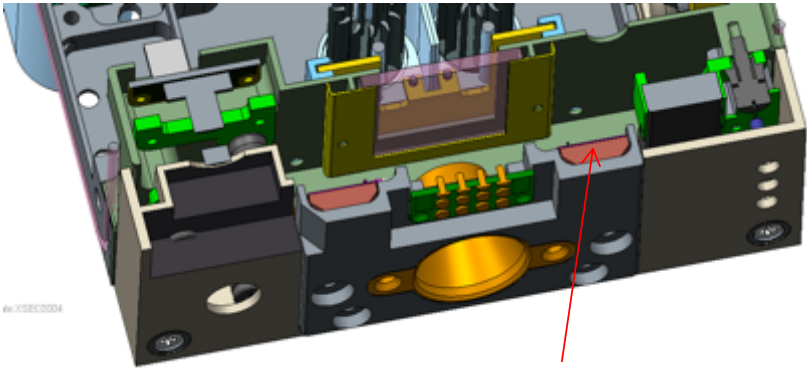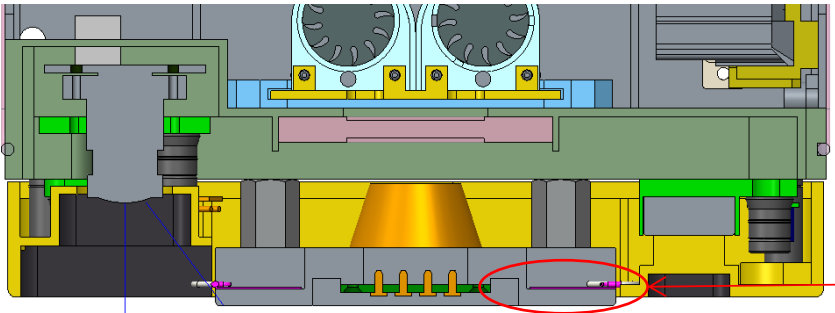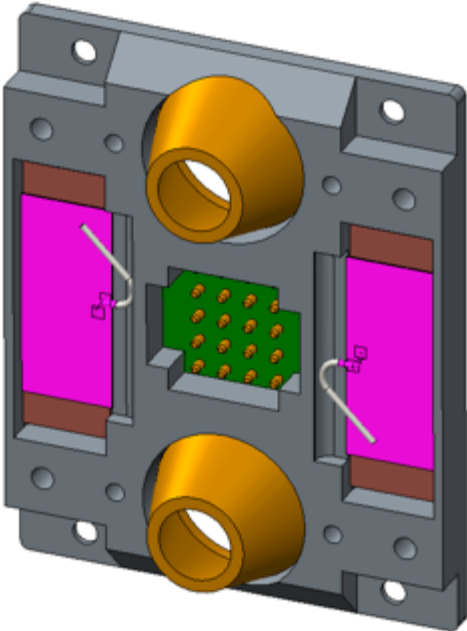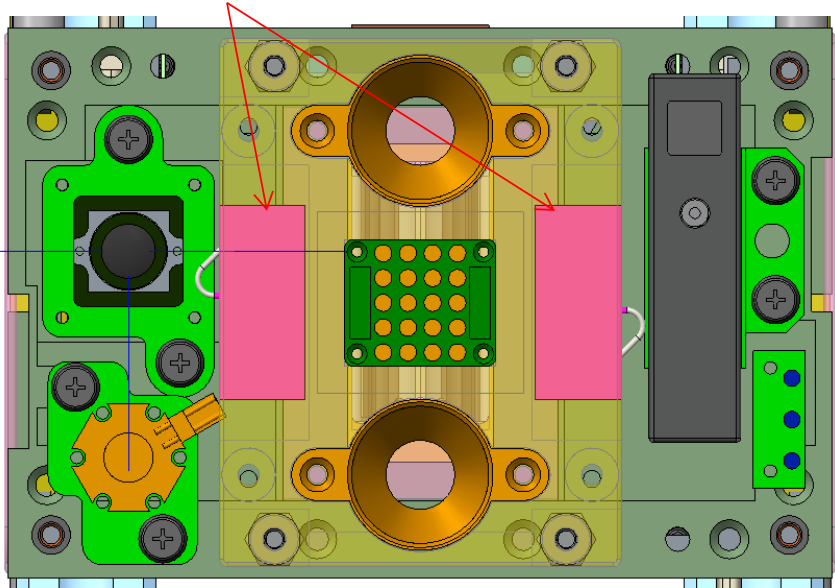

Antenna location

Low adsorbent
filler



Antenna Modularity

- An SMA/U.FL adapter has been added to ease installation and replacement.
- This adapter is in-line.



Astrobee FSW Subsystem



Design Overview



Astrobee FSW Features

- Manage Astrobee sensing and actuation
- Navigate and localize within the ISS
- Perform autonomous docking (+ return to dock)
- Perform autonomous perching
- Manage multisensory interaction with the crew
- Support “Guest Science” operations
- Support plan based automated tasks
- Support remote control from ground
- Support communication between Astrobees



FSW Components and Design Maturity @ PTR-3

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity. Software builds are expected to continue through on-orbit testing.

- OS (Communication Framework)
- Localization
 - Marker less Flying
 - Docking
 - Perching
- Offline mapping for localization
- *Pose Estimation + Propulsion Control (GNC)*

Mature

High Risk Components have been mitigated early

- Executive
 - Mode Management
 - Sequencer (Plan Execution)
- Mobility
 - Generates and validates trajectories
 - Performs collision detection
- Fault Management

Evolving design

Current main effort : low risk but critical components for the overall system

- Guest Science
- User Interfaces
- Platform Management

Draft only

Low Risk Components will be addressed in future Builds



FSW Components and Design Maturity @ PTR-3 delta

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity. Software builds are expected to continue through on-orbit testing.

- OS (Communication Framework)
- Localization
 - Marker less Flying
 - Docking
 - Perching
- Offline mapping for localization
- *Pose Estimation + Propulsion Control (GNC)*

Mature

High Risk Components have been mitigated early

- Executive
 - Mode Management
 - Sequencer (Plan Execution)
- Mobility
 - Generates and validates trajectories
 - Performs collision detection
- Fault Management

Mature

Low risk but critical Components for the overall system

- Guest Science
- User Interfaces
- Platform Management

Mostly designed

Low Risk Components are addressed in future build



Fault management



Fault Management Overview

- Fault detection is performed by the subsystems
- Subsystems use configurable limits to identify faults
- Subsystems are be responsible for executing basic responses for a fault.
 - This allows for non-critical faults to be handled at a subsystem level rather than at the system level
- Subsystems communicate faults to the System Monitor
- The System Monitor can trigger system wide responses to faults and heartbeats
- ~100 faults already documented in IRG-FF042-01-Astrobee-FMECA.xlsx. Fault table automatically generated from the spreadsheet.
- Reserve for “Recovery” mechanism (not implemented)



System Manager


- System Manager module is responsible for
 - Keeping track of which faults are enabled or triggered
 - Reporting subsystem warnings and triggered faults to the ground
 - Monitoring subsystem heartbeats
- Responses type (can be extended):
 - **No-op** (advisory only, subsystem may provide response)
 - **Fault** (Mobility not affected, current command completes but system does not accept new commands)
 - **Stop** (Vehicle stops and maintain position)
 - **Idle Propulsion** (Vehicle propulsion disabled)



Mobility



Mobility Subsystem

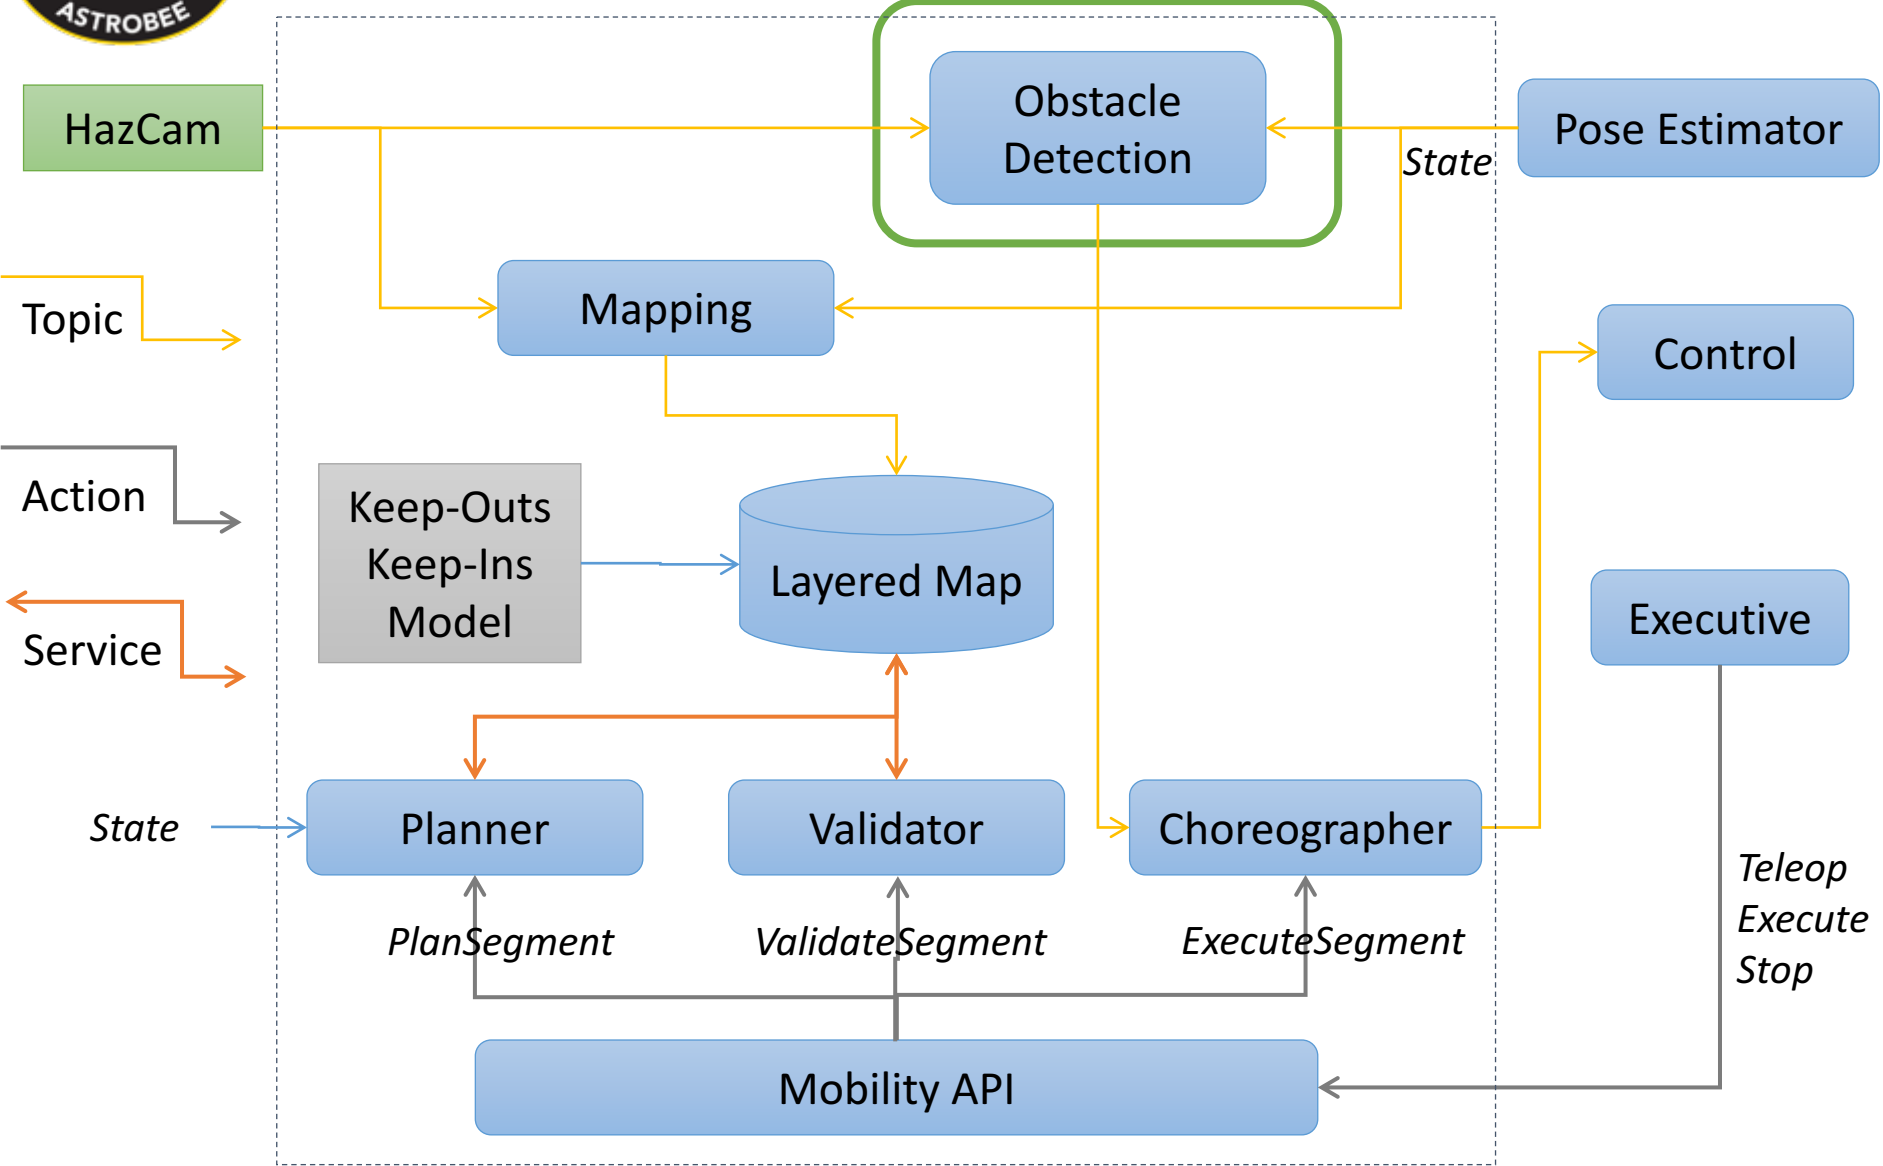




Collision Detection: Problem

- Use depth images / point clouds to forecast upcoming collisions
 - Assumption: not interested in classifying or modelling obstacles, only detecting collisions.
 - Assumption: each measurement is discarded after checking, and so no map is built.

Picoflexx Sensor

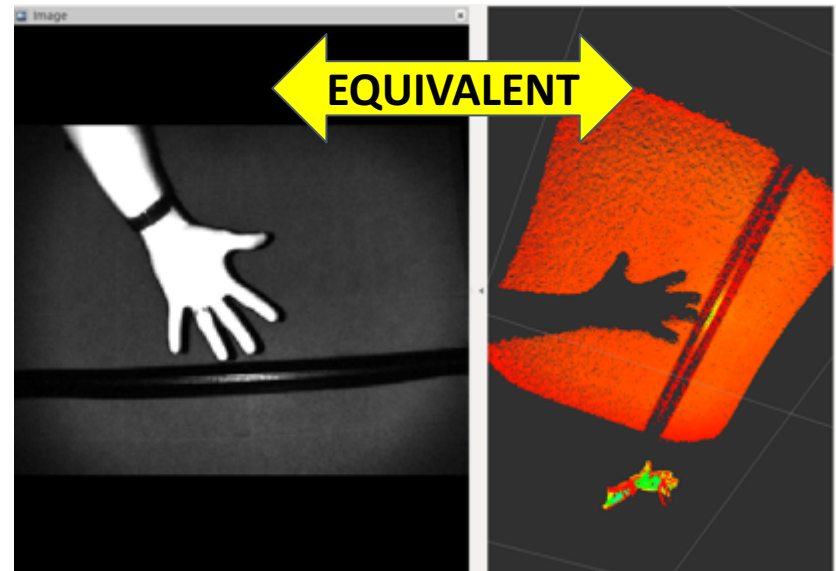



Depth image (224 x 171 px) Point cloud



Collision Detection: Algorithmic Complexity

- Reduce complexity of depth data by discretizing space into $K \times K \times K$ regions
- Safe radius from geometric center of freeflyer given by R (size of FF + tolerance)
- Collision checking reduces to evaluating if the squared distance between the curve $x(t)$ defined by the setpoint over $t=[0:T]$ and the obstacle is $\leq (R+K)^2$
 - Can be done by just checking boundary conditions and turning points.
 - Equivalent to solving for a cubic root: closed form.
 - Complexity linear in $(\#obstacles) * (\#setpoints)$

Squared distance between the freeflyer geometric center and the origin of the obstacle sphere

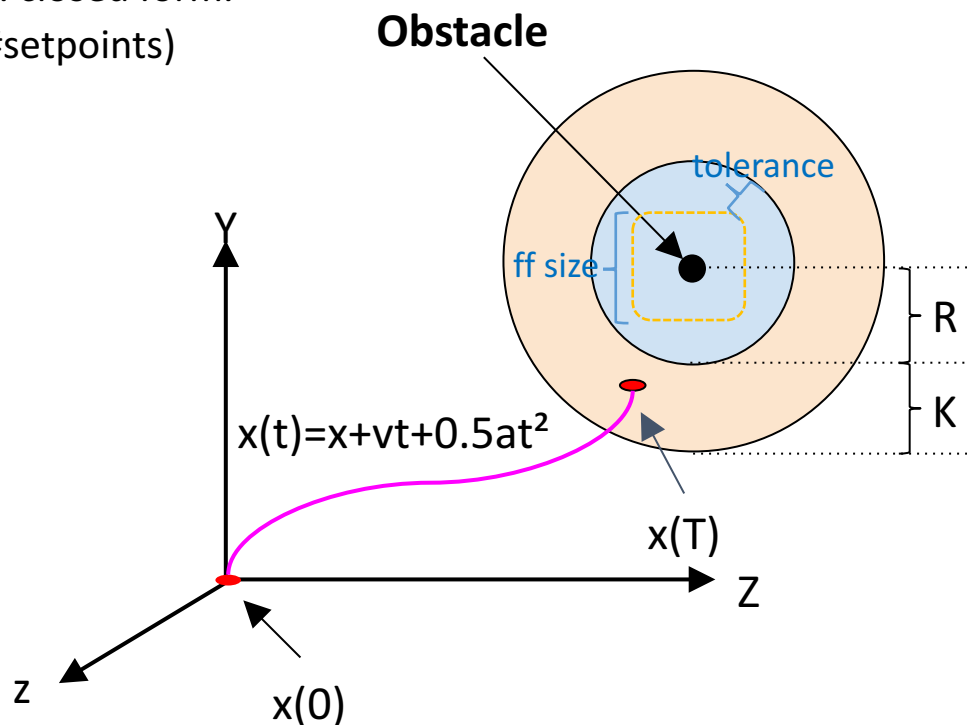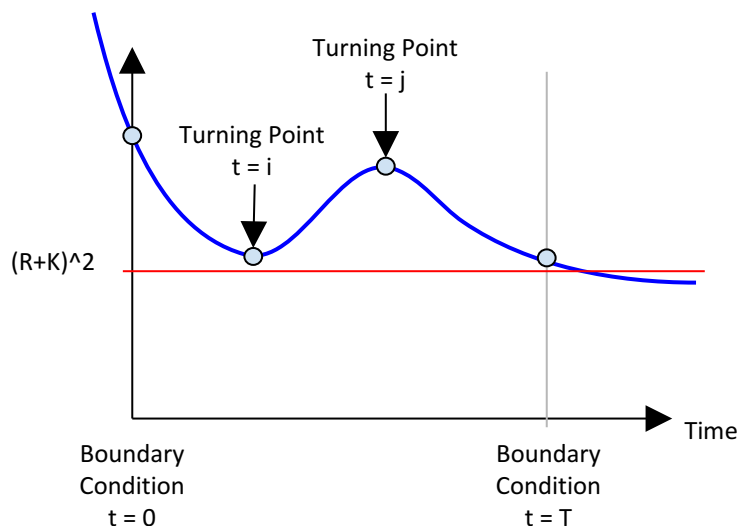



Guest Science




FSW APIs Overview

- FSW uses ROS within Astrobee: Messages, Services and Actions define the internal API
- Astrobee & Ground communication uses DDS and the RAPID framework for command and telemetry
- Commands:
 - Commands are defined using XP-JSON schema, tools auto-generates RAPID command dictionary
 - FSW defined a "ROS Command" mirroring the DDS command structure
 - Onboard Astrobee Guest Science or Ground Applications **share** the **same command dictionary** (some commands unique to one client) with either DDS or ROS transport
- Telemetry:
 - Internal uses ROS Messages (using ROS messages when possible)
 - External uses DDS Messages (subset only, re-using RAPID messages)



FSW APIs Access

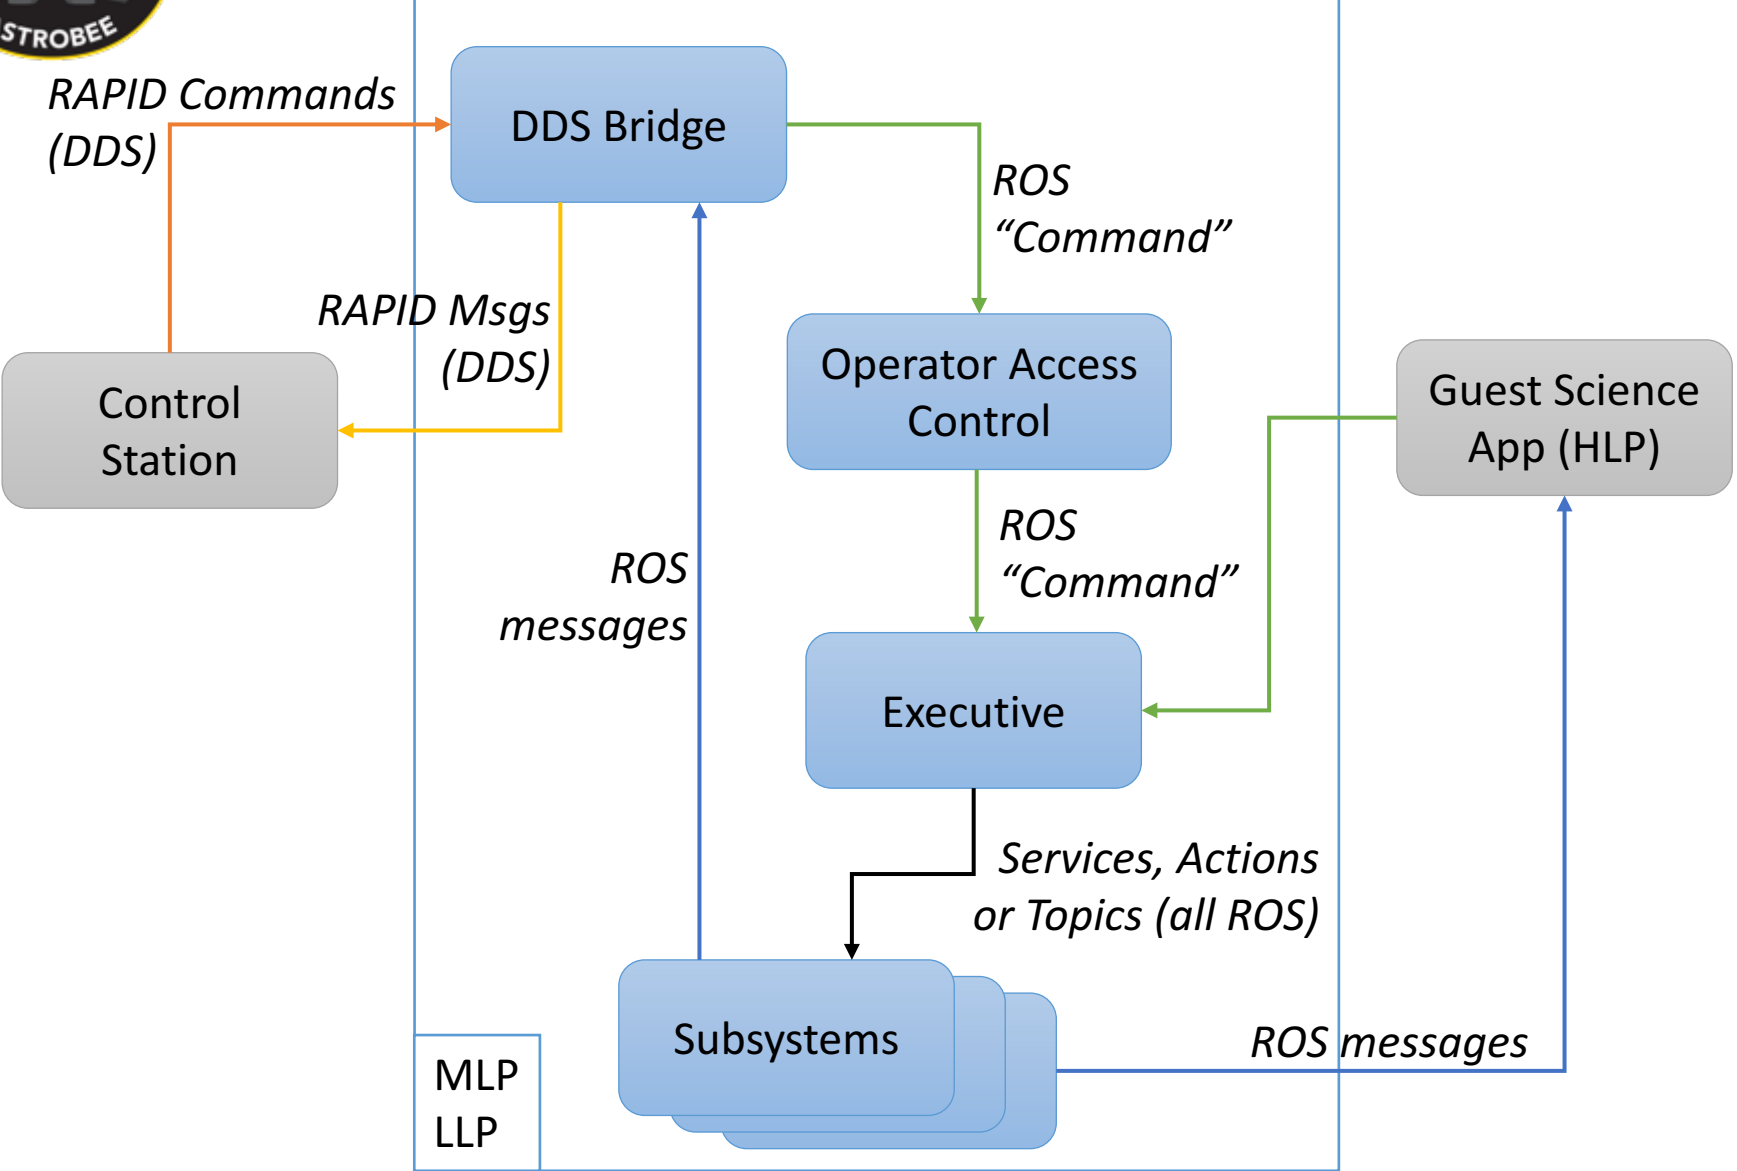



Onboard Guest Science

- Guest science benefits from a quad-core processor running Android
- Interface with guest science hardware through USB (possible to have special USB gadgets)
- Guest science runs as an Android app on the high level processor.
- Guest science apps communicate to/from outside a Freeflyer using the DDS protocol
- Guest science API consists of the ROS telemetry topics and the generic FSW “ROS Command”



Platform Management



Software Update Overview

- FSW is deployed on 4 computers (Astrobee + Dock) running Linux and Android
- Astrobee contains 7 distinct microprocessors with custom firmware + several microprocessors with COTS firmware
- All paths for on orbit updates have been identified
- P4D provides all the physical connections to implement these updates
- Software deliverables includes:
 - Custom firmware(s)
 - Adapted Kernels
 - Linux and Android Operating Systems
 - FSW Dependencies
 - FSW code



Astrobee Custom Firmware List

Firmware	Board Type	Update Path
Dock control firmware	PIC32MX795F512H	Dock Processor via I2C
EPS firmware	PIC32MX795F512H	LLP via I2C
PMC firmware	PIC32MX795F512H	LLP via I2C
Speedcam laser firmware	unknown	ground harness only
Speedcam velocity firmware	ARM Cortex M4	LLP via USB
Signal lights firmware	PIC32MX795F512H	LLP via I2C
PerchArm firmware	dsPIC33EP512MC806	MLP via Serial over USB



Astrobee Software Categories

Software	Board Type	Update Path
Wandboard Kernel	Wandboard Dual, Dual core i.MX6	Ethernet from Dock using Recovery
Inforce Kernel	Inforce, Quad core Snapdragon 805	fastboot over USB from LLP
Linux Base OS	['Wandboard', 'Inforce']	fastboot (Inforce) or recovery (Wandboard)
Android Base OS	Inforce	fastboot using USB from LLP
FSW Linux Dependencies	['Wandboard', 'Inforce']	apt using Ethernet from Dock
FSW for Linux	['Wandboard', 'Inforce']	apt using Ethernet from Dock
FSW for Android	Inforce	adb over Ethernet from MLP
dock software repository	Wandboard	rsync over Ethernet from ground



Software Update Methods

- Base system (Kernel + OS) are flashed using:
 - Uboot (Wandboard boards, Linux)
 - fastboot (Inforce boards, Linux and Android)
- FSW dependencies are delivered as Debian packages
- FSW itself also delivered as Debian package
- Dock computer act as Debian repository
 - Only one copy from ground to ISS
 - Benefit from Debian “apt” toolset for safe upgrade
- Filesystem uses OverlayFS
 - Permanence of a valid OS and software
 - Allow temporary configuration changes while running



Localization



Vision Algorithms

- Four MLP vision nodes send observations to the Pose Estimator:
 - Sparse Mapping : runs for regular navigation, provides absolute position within the ISS map
 - **Visual Odometry: velocity and maintain pose when no features are available**
 - Handrail Detector : only runs for perching
 - AR Tags : only runs for docking





Optical Flow to Visual Odometry

- EKF update is same as than with optical flow
- 16 frames are retained instead of 4
- Selected observations are used rather than last 4 frames, and always keep oldest visible feature frame
- Benefits:
 - *More stable localization in nominal conditions*
 - *Resilience to loss of map features (unmapped, obstruction, light, ...)*
- Problem: covariance matrix size is $(21 + 6 * \text{augmentations})^2$, increase from 4 to 16 is 576% increase, EKF had to be optimized by a factor 6

“High-precision, consistent EKF-based visual-inertial odometry.” Mingyang Li and Anastasios Mourikis. International Journal of Robotics Research, 2013.



Visual Odometry Performance

- EKF is part of GNC, developed with Simulink. Despite optimizations, could not deliver the required performance.
- Computational intensive blocks have been re-written with C++ code using optimized libraries


Function	MathWorks “Optimized” Simulink-Generated C	FSW Hand Written C++ using Eigen	Improvement
of_residual_and_h	87.0 s	2.0 s	98% (43x)
delta_state_and_cov	22.5 s	3.5 s	84% (6x)
covariance_multiply	18 s	< 2 s	89% (~10x)



Video of Visual Odometry



Robustness to Lighting Condition

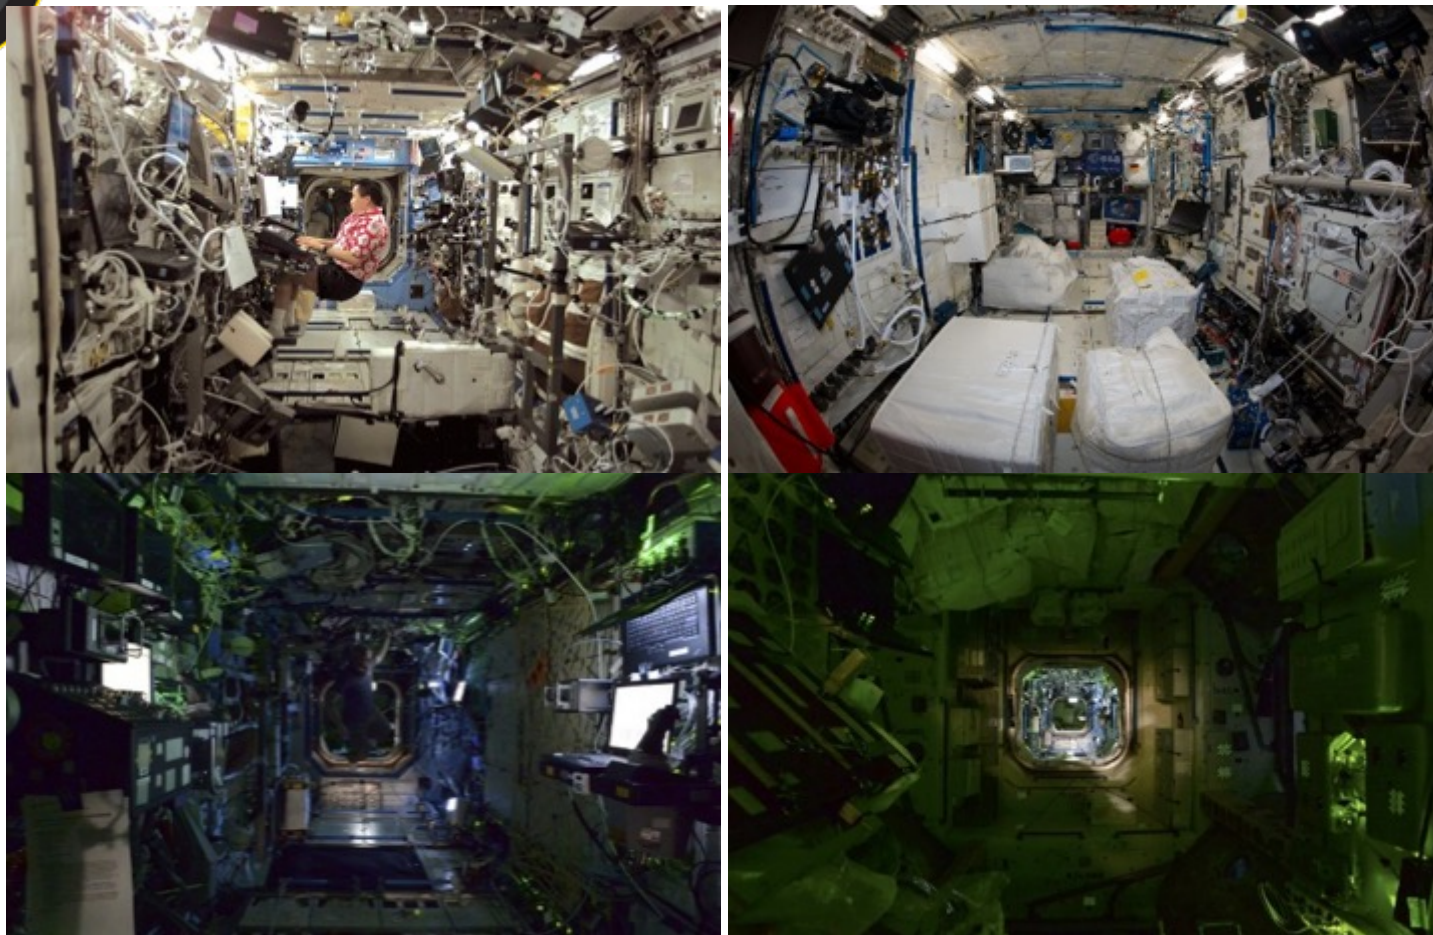


Lighting Conditions at the Day & Night Times on the ISS

“Robust Visual Localization in Changing Lighting Conditions.” Pyojin Kim, Brian Coltin, Oleg Alexandrov and H. Jin Kim. Under submission.

Pyojin's Algorithm


number of inlier points: 690
number of matched points: 119
estimated lighting condition: 120 lux
exposure time setting: x1

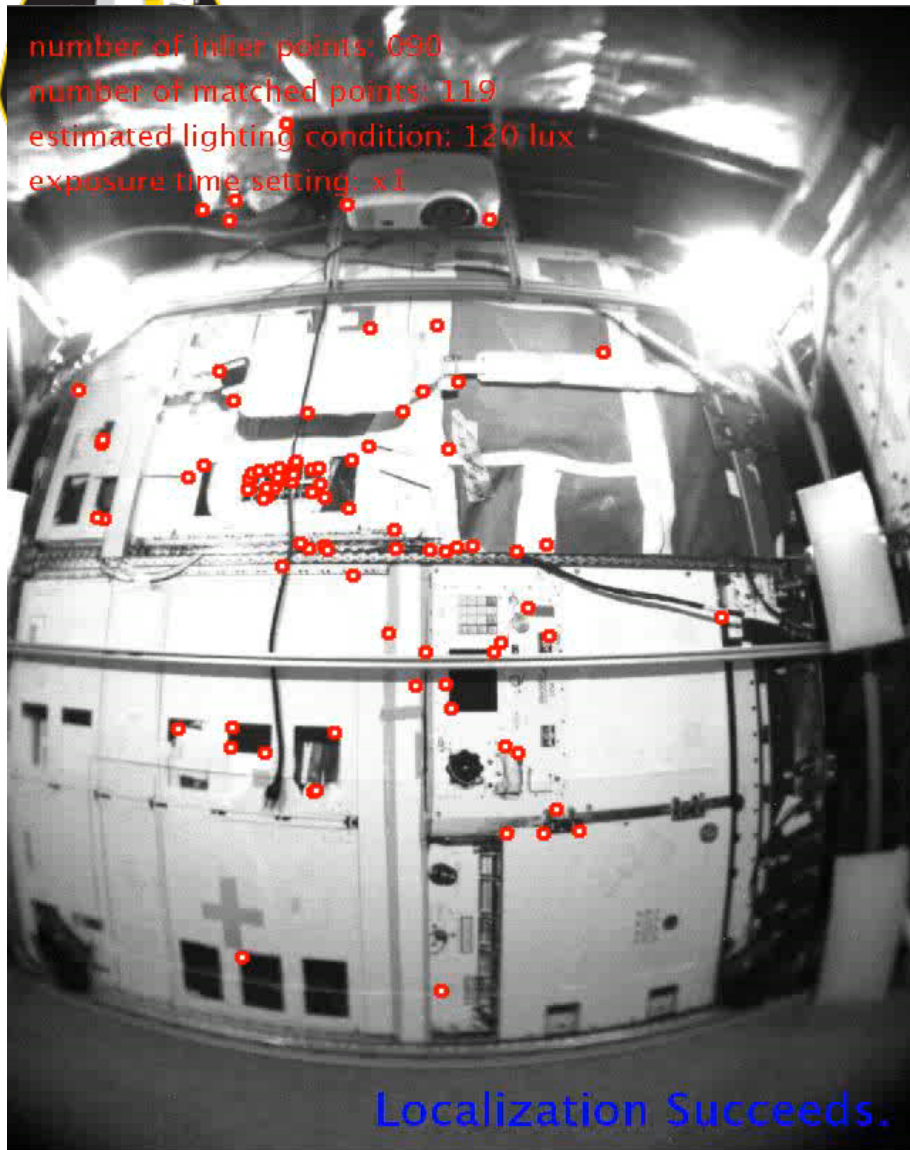

Localization Succeeds.

Original Algorithm

number of inlier points: 127
number of matched points: 183
estimated lighting condition: 999 lux
exposure time setting: x1

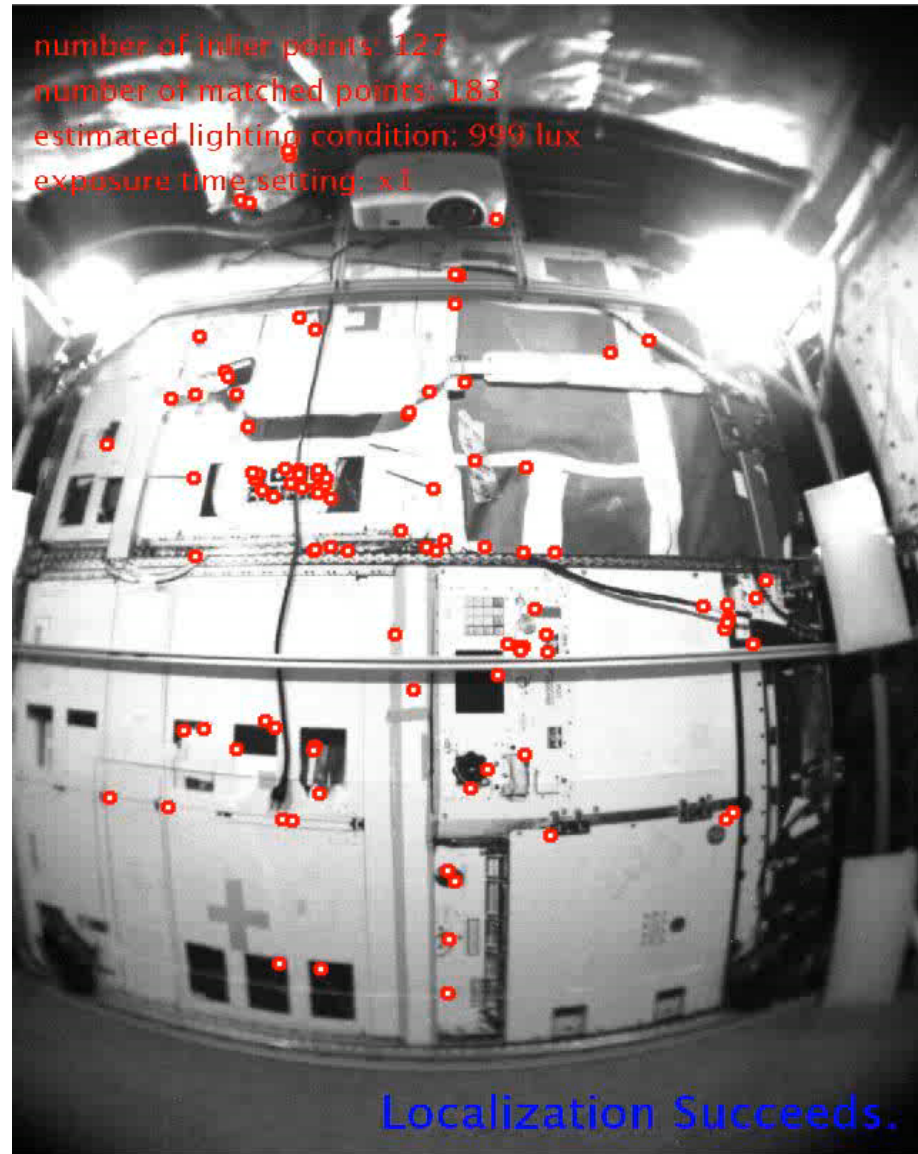

Localization Succeeds.



Forward Work

- Build 2 (CERT TR)
 - Software update (platform management)
 - Freeze DDS API for Crew Control Station
 - Refine Guest Science API
 - Mobility (obstacle detection and perching procedure)
 - Finalize all subsystems controlling hardware devices
 - Improve Infrastructure (including simulation tools)
- Build 3 (Flight TR)
 - Complete platform management (file mgt. and transfer, etc.)
 - Increase system reliability by extensive testing on Granite Lab and new Gantry (3D) facility
 - Adaptations to ISS specific environment
 - Implement UI



BACKUP SLIDES



Overall architecture




Selected HW Architecture

- *Three ARM processors to isolate guest code, vision based navigation and 100 Hz control loop*
- **Low Level Processor (LLP)** – Linux, Dual core
 - Runs high freq. EKF and propulsion control loop
- **Mid Level Processor (MLP)** – Linux, Quad core
 - Runs absolute localization algorithms, obstacle detection, sequencer, communications
 - Heavy processing power used by vision
- **High Level Processor (HLP)** – Android, Quad core
 - Interface with Science Camera and Display
 - Encodes video with dedicated hardware
 - Runs guest science code




System Architecture (MLP+LLP)

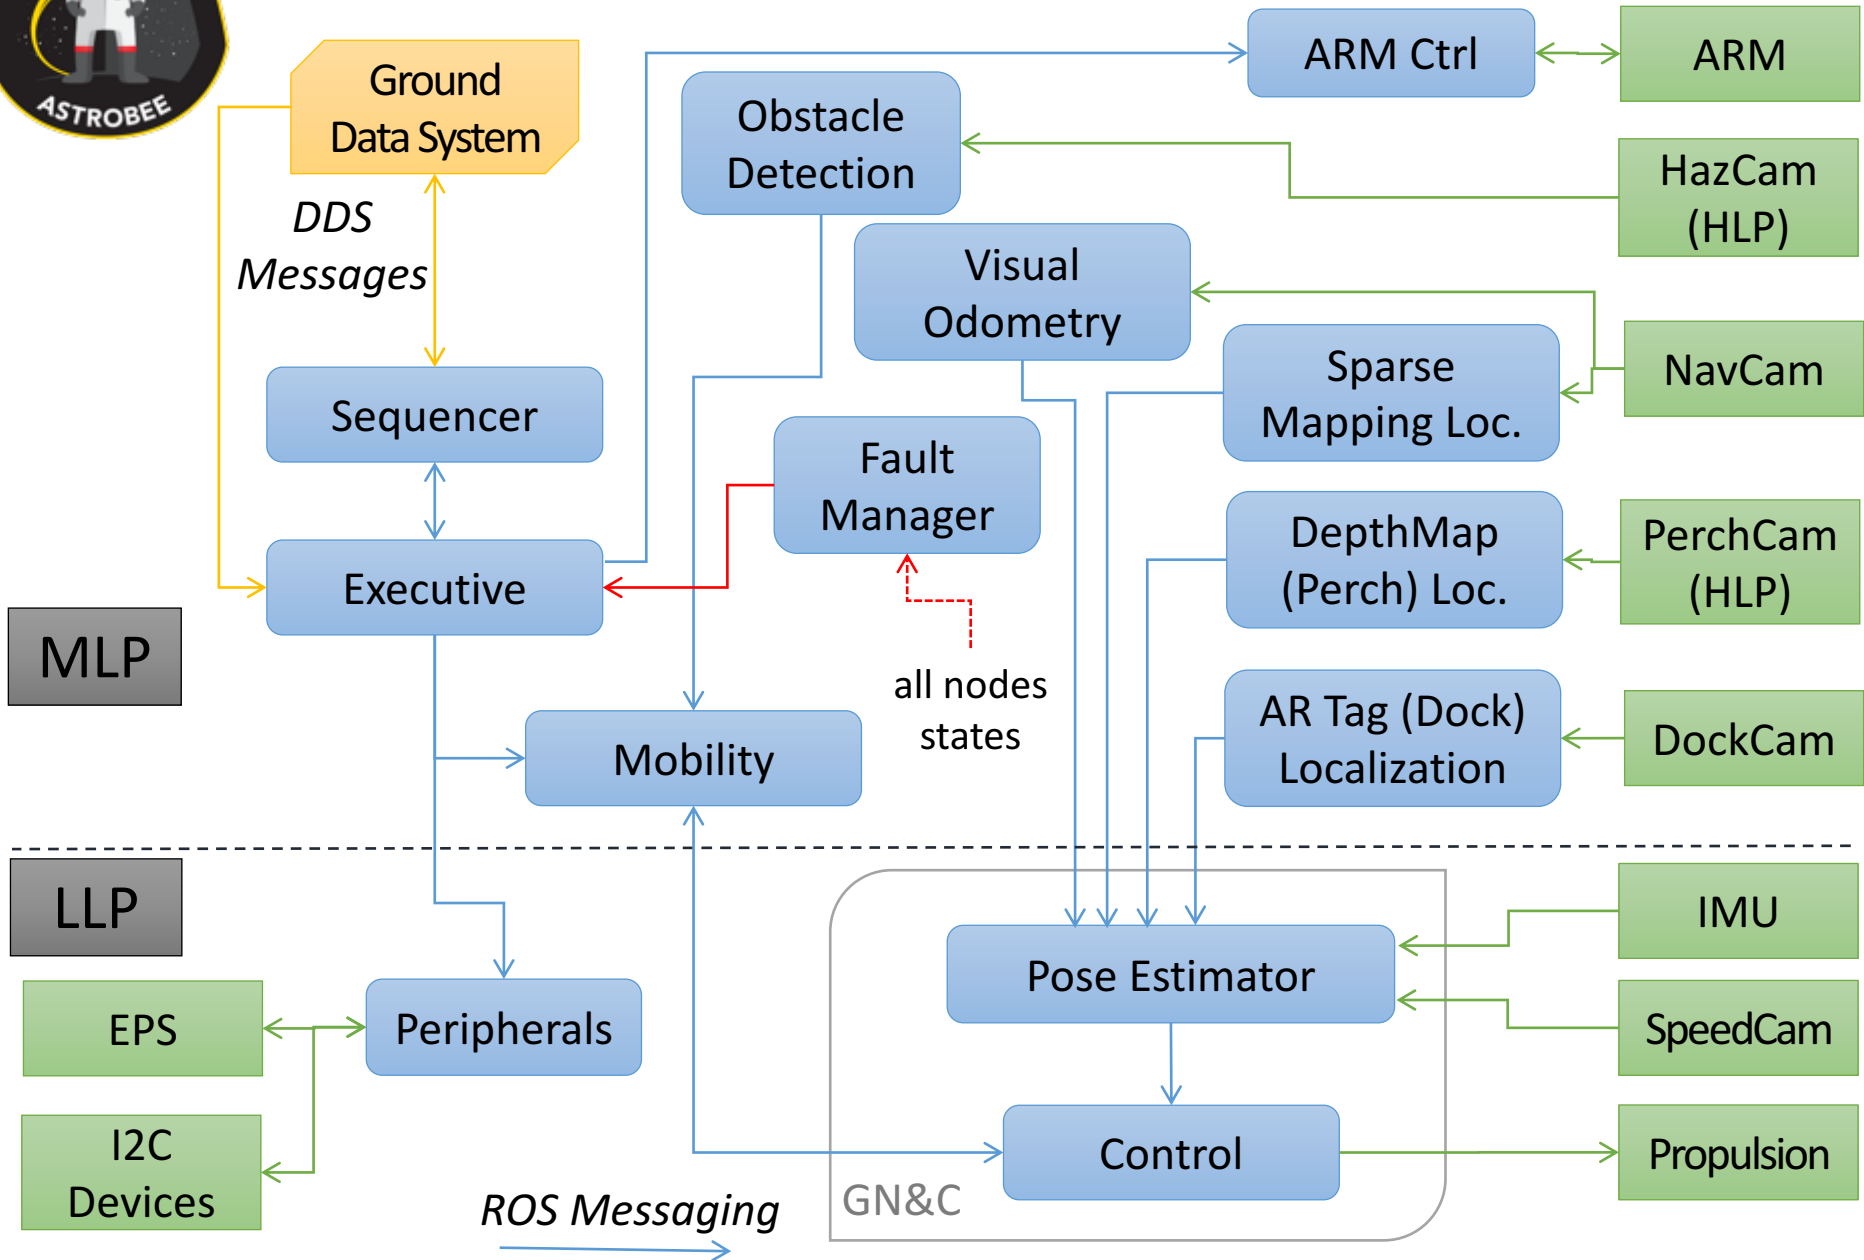



System Architecture (HLP)

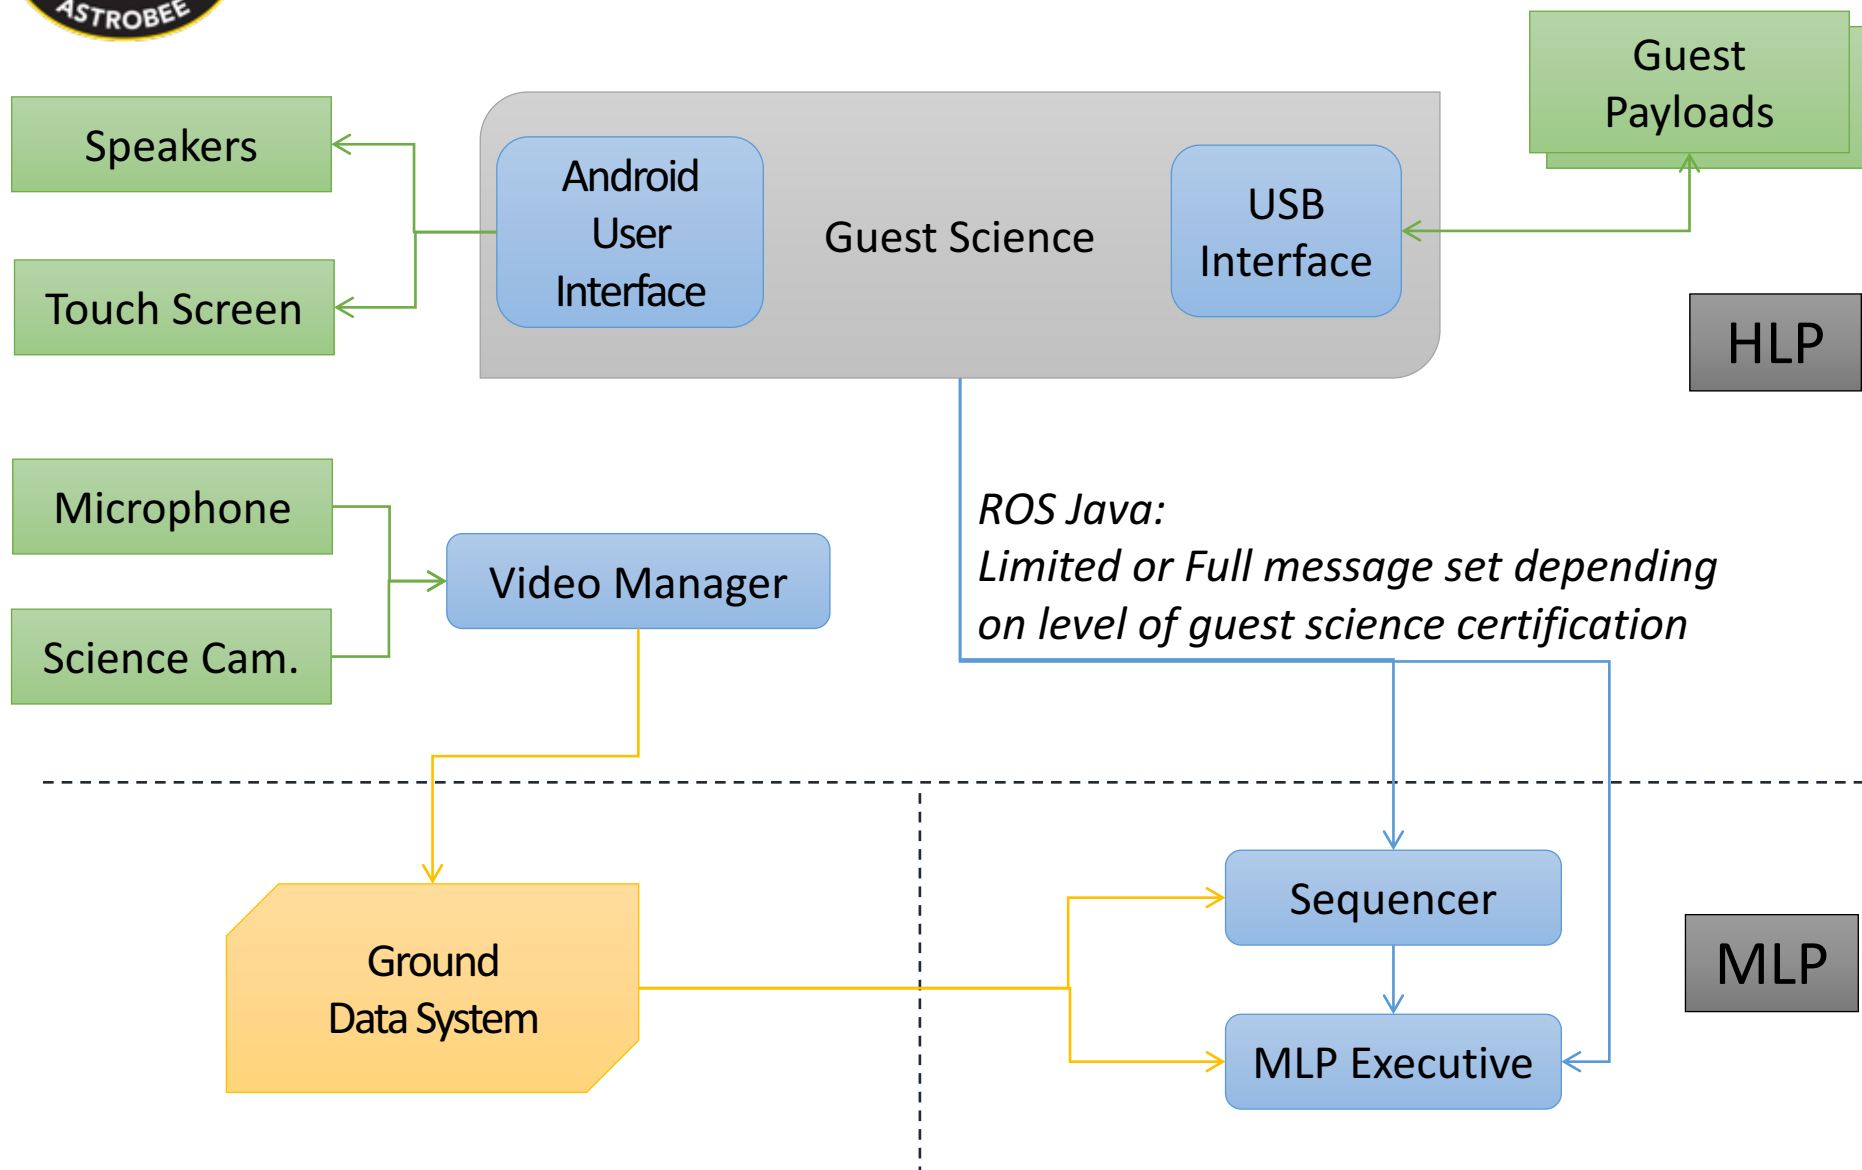



Communication Framework

Candidates

Common Flight Executive (CFE)

Robotic Operating System (ROS)

Mobile Robot Programing Toolkit (MRPT)

Joint Architecture for Unmanned Systems (JAUS)

IRG RoverSW (SORA + **RAPID**)

Data Distribution Service (DDS)

Selected solution is hybrid of:

- ROS for onboard messaging
- DDS for remote comm.

- Key factors for ROS selection (vs. CFE):
 - Messages definition and serialization support
 - Better service isolation
 - Documentation & Support
 - Library of Robotics Algorithms Available
- Key factors for DDS + RAPID
 - Multiple Configurable Quality Of Service (QoS)
 - ISS Tested + Heritage from SmartSpheres



Localization Design Drivers

	Localization Options	
Infrastructure + External Maps	ISS Wifi	Does not provide desired accuracy
	Beacons (passive/active)	Modifications to ISS / change dependent
Robot Builds Maps	Stereo Vision	“Metric” (shape) maps makes matching difficult
	3D sensors (LIDAR, ...)	
	Monocular Vision	“Features” maps efficient to filter

Requirements

Localize anywhere on ISS US segment

Minimize modifications to ISS


Cope with changing environment

Selected Solution (hybrid):

- Build and update maps offline
- Match visual features online
(3 modes) for localization




Granite Lab Map

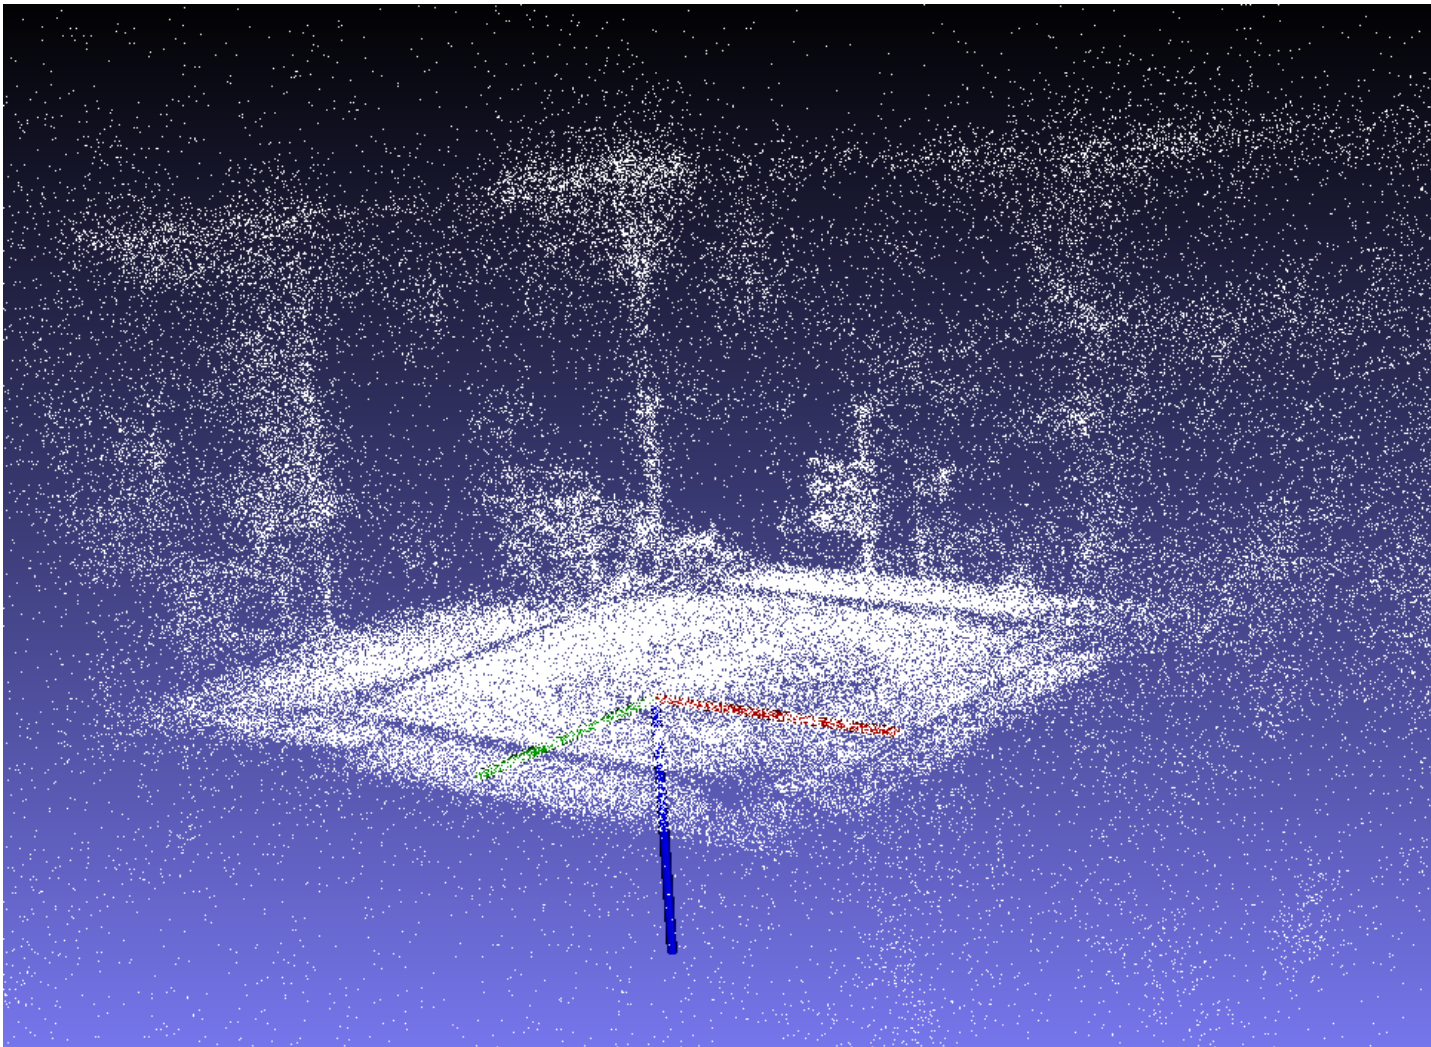



Map of connected ISS Modules (data from SmartSpheres project0

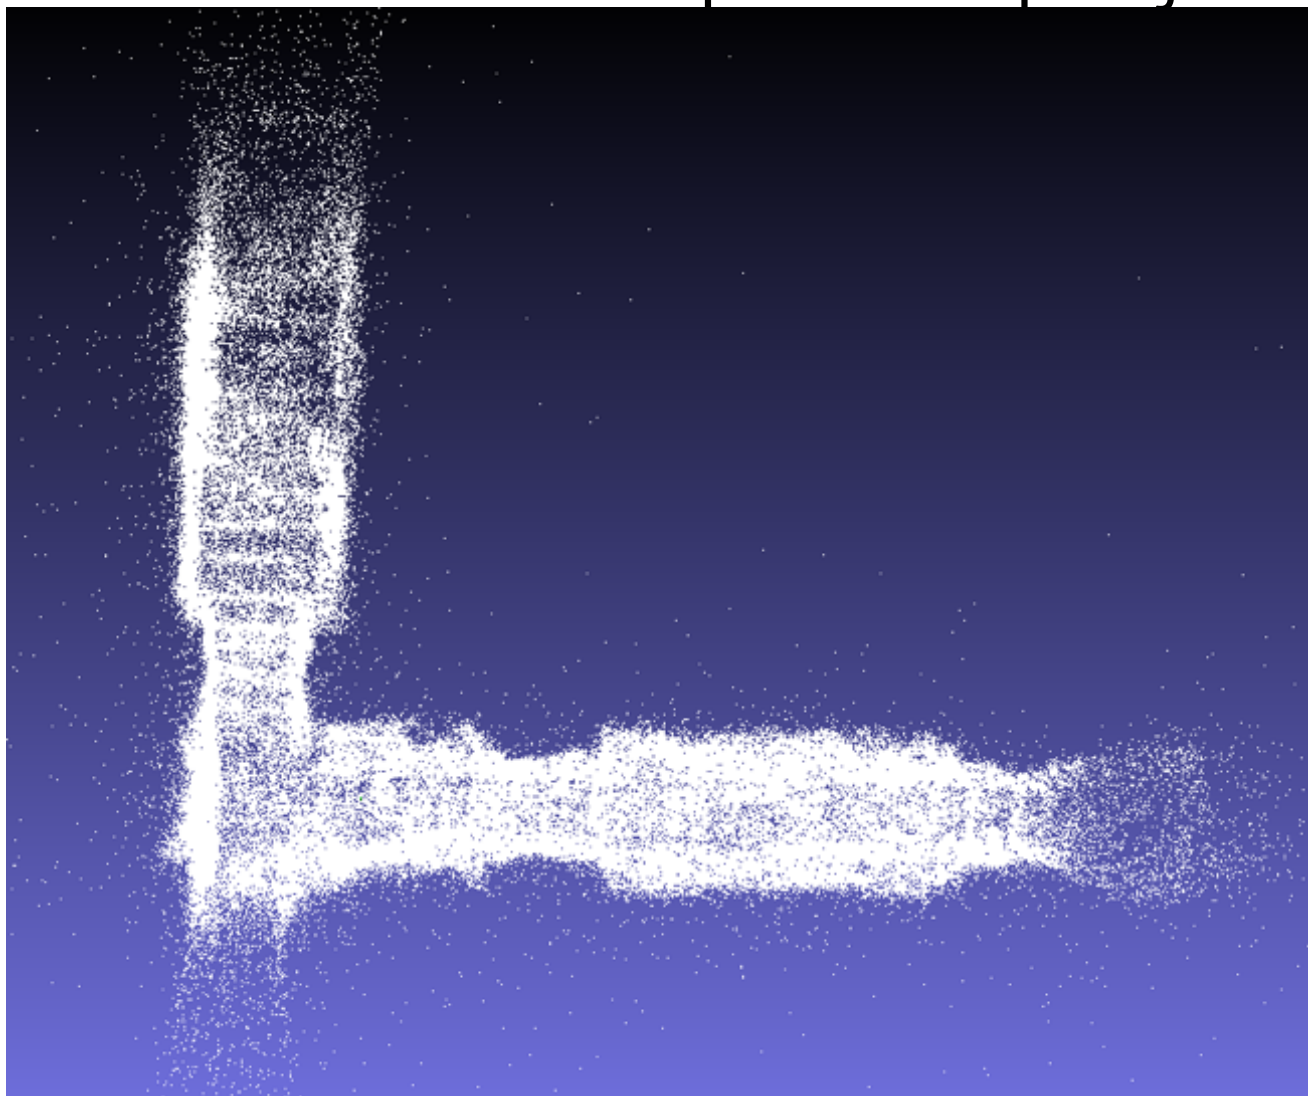



Platform architecture

Processors and communication links

Astrobee GN&C Subsystem



Delta PTR3 Design Overview



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.

Component	Maturity / Risk	Forward Work
IMU	High / Low	
Controller	High / Low	
Estimator	High / Low	
FAM	High / Low	
Simulator	High / Low	
Fault Management	High / Low	Implement faults from FMECA



New/Changes from PTR3

Component	New / Changes
Estimator	<ul style="list-style-type: none">- Re-worked optical flow augmentation process to decrease drift when operating in an area with no mapped features- Changes to allow for removing gravity from the IMU signals to allow for ground testing of 3 axis attitude control
Fault Management	<ul style="list-style-type: none">- Identified baseline GN&C faults



GN&C: Overview


Design Drivers

Parameter	Linear Requirement	Angular Requirement
Maintain Controllability	Up to 50 cm/s	Up to 45 deg/s
Max Acceleration	10 cm/s ²	10 deg/s ²
Pose Error (Nominal)	< 20 cm	< 20 deg
Pose Error (Assisted w/ AR tags, etc.)	< 2 cm	< 8 deg
Use Vision based navigation		




GN&C: Overview

Architecture Diagram

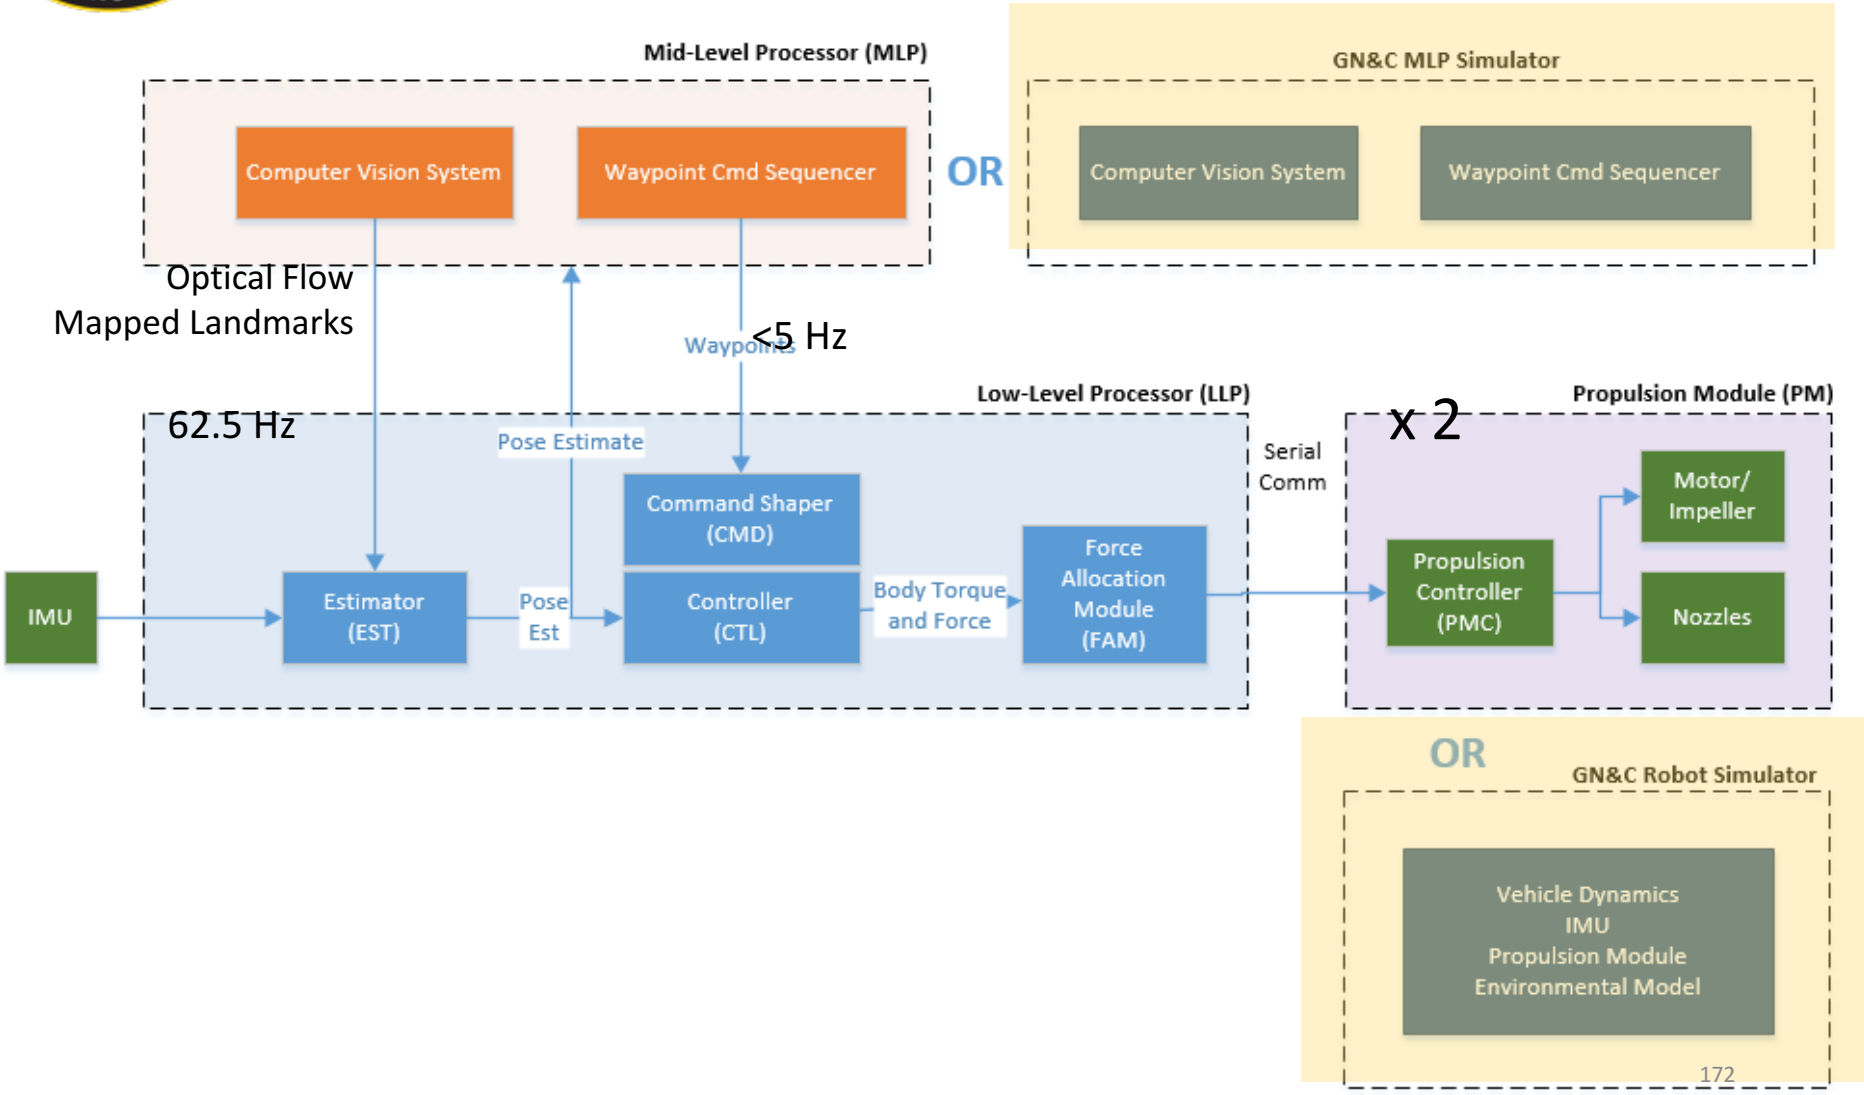




GN&C: Overview Architecture Diagram

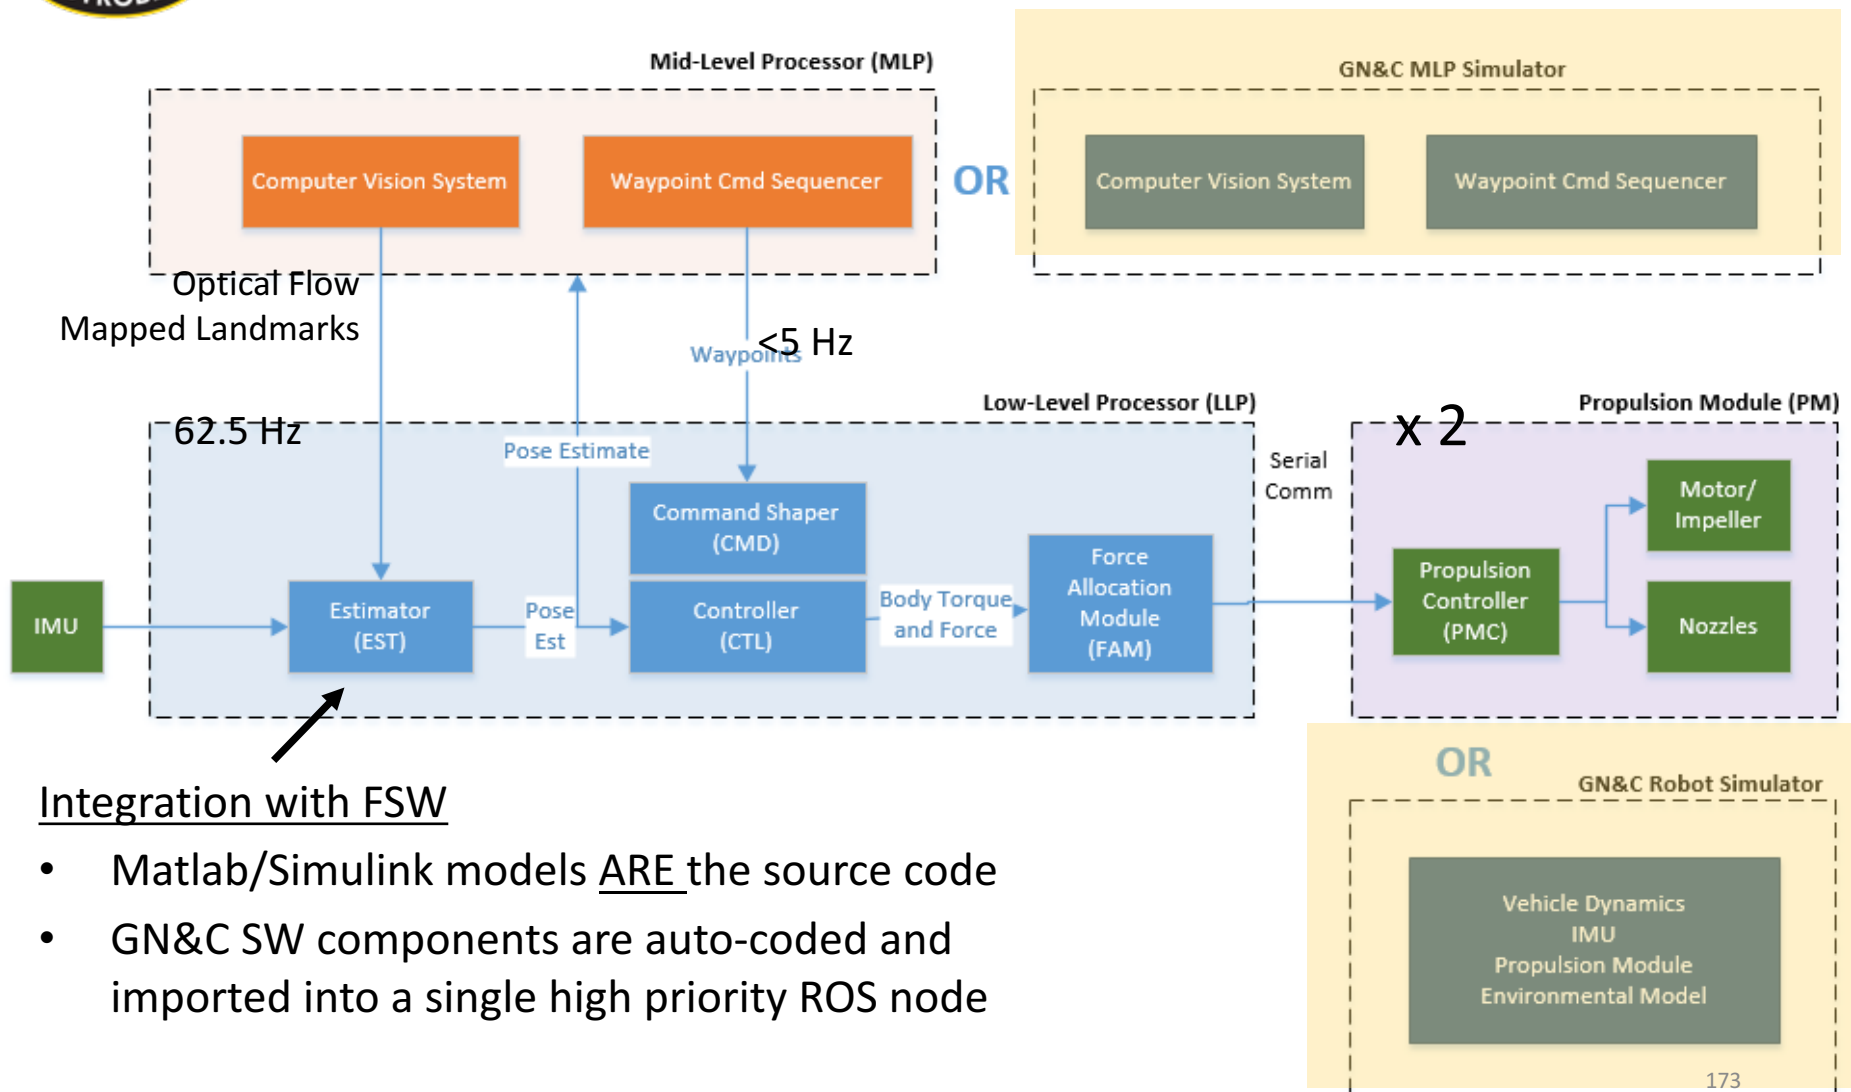



GN&C: Software Estimator (EST)

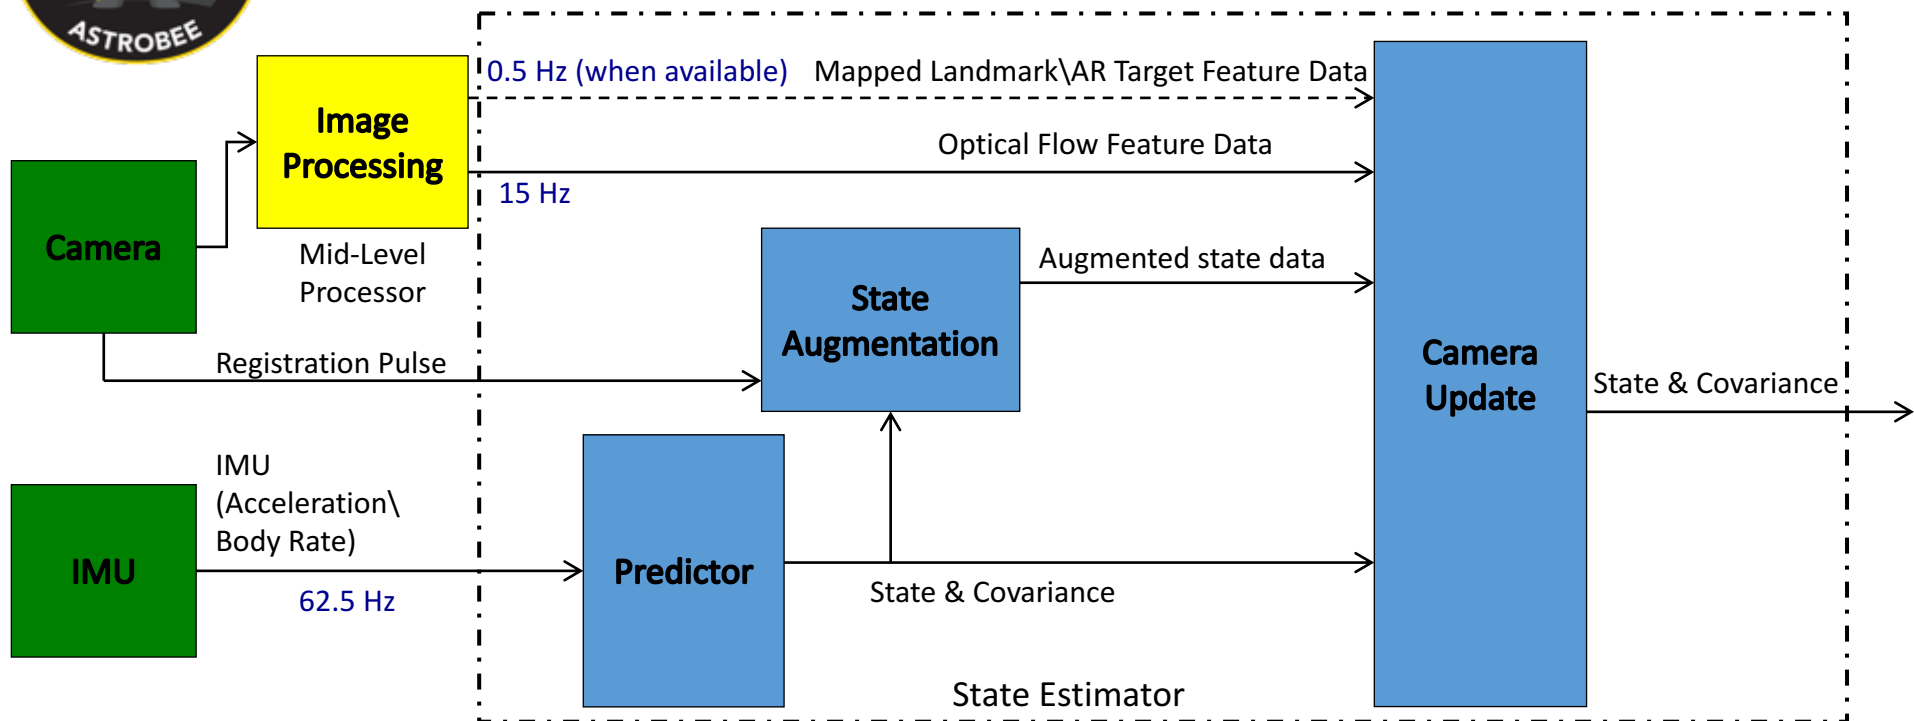


Total of 45 states: 15 core states, 6 mapped landmark, and 24 optical flow augmented states

$$x(t) = [\quad q \quad b_g \quad {}^{iss}V \quad b_a \quad {}^{iss}P \quad C_{\theta,ML} \quad {}^{iss}C_{p,ML} \quad C_{\theta,OF,1} \quad {}^{iss}C_{p,OF,1} \quad \cdots \quad C_{\theta,OF,5} \quad {}^{iss}C_{p,OF,5} \quad]$$



GNC: Software Estimator (EST)


- Optical flow augmentation management logic changed to retain the oldest augmentations that contain features that are still visible
- Retaining the oldest augmentations reduces drift and improves accuracy when operating in areas with poor map coverage

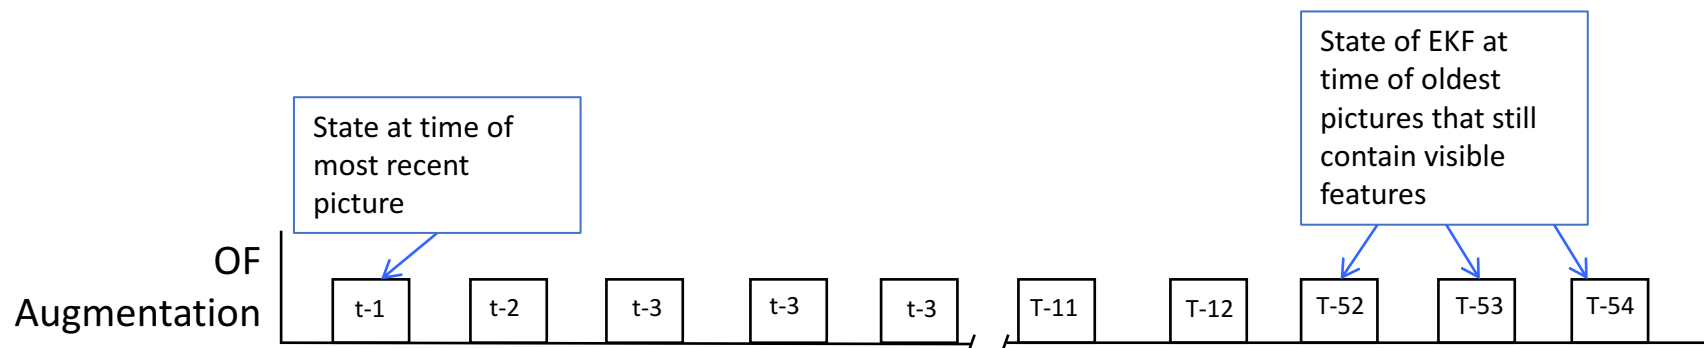



GN&C: Software Estimator (EST)

- Gravity removal done by using VisualEyes attitude estimate to calculate body frame gravity vector, then subtract from IMU measurement

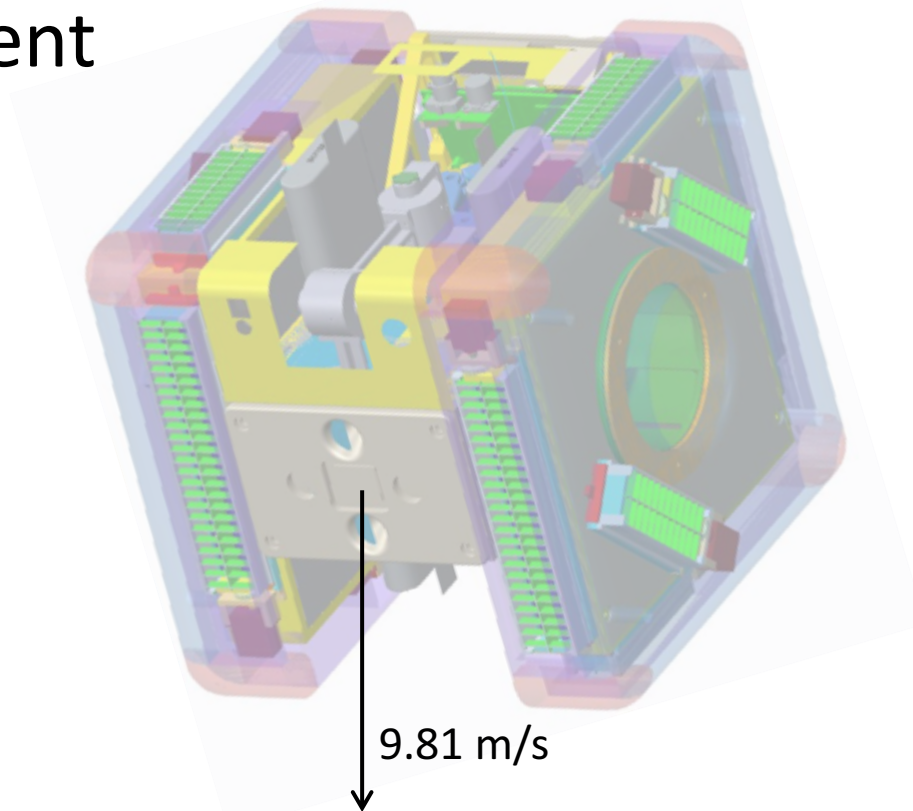



GN&C: Simulation

Current and Planned Uses

- Development of controller and estimator
- Software testing
- Control robustness analysis
(linear analysis and Monte Carlo testing)
- Trade study analysis tool
- Evaluation of sortie scenarios
 - power consumption evaluation
 - Sound level histogram
 - time to execute
 - Max required rates and accelerations
- Requirements verification
(where ground testing is not possible)





Planned Future Testing

- Granite table goniometer testing
 - Allows testing in different orientations
- Gantry testing
 - Allows testing 6-DOF system



Monte Carlo Analysis: Docking

Docking Scenario repeated 873 times varying noise parameters, noise seeds, alignments, and uncertainties.

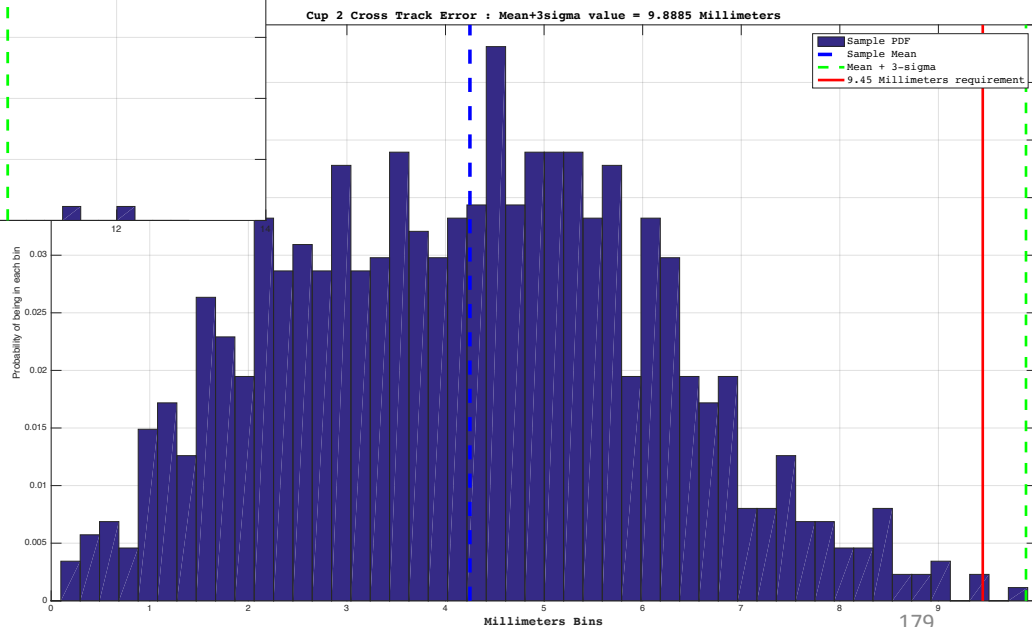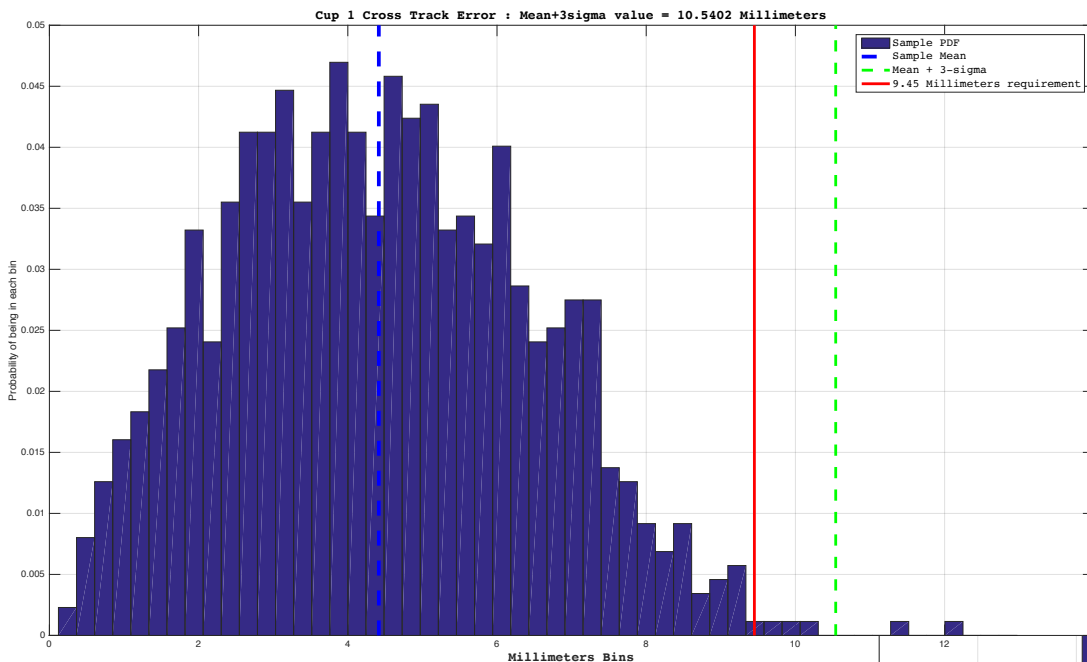


Scenario only showed errors large enough to fail docking in a handful of scenarios (mostly due to large position or alignment errors of the Dock Cam).



Testing: Ground Effect

Testing to ensure Astrobee could reject suction force from dock cooling fan and from propulsion system

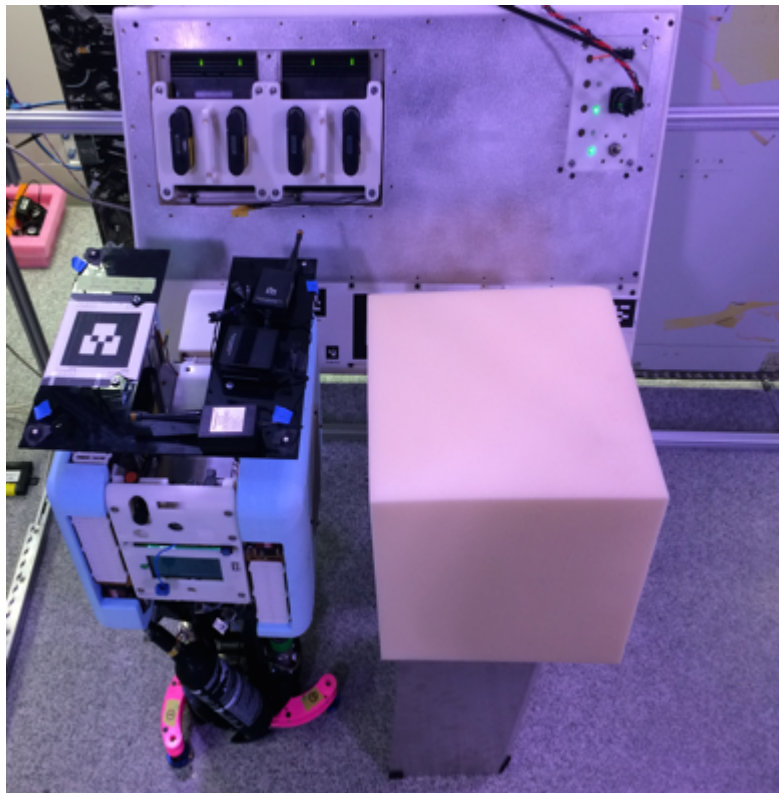

Astrobee Perching Arm



Design Overview



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.

Component	Maturity / Risk	Forward Work
Arm	High / Low	
Gripper	High / Low	
Controller board	High / Low	
Software	High / Low	
Payload Attachment Mechanism	High / Low	Minor design updates






New/Changes from PTR3

Component	New / Changes
Design	<ul style="list-style-type: none">- Aesthetic design updates for cable routing and appearance
Hardware	<ul style="list-style-type: none">- New motors for both arm joints and gripper- New torsional springs for gripper- New silicone rubber pad for gripper
Avionics	<ul style="list-style-type: none">- New load switch and current limiter for gripper motor- New level shifter to resolve impedance matching issue- New connector boards for arm distal link and gripper
Software	<ul style="list-style-type: none">- New firmware for arm motors- Update MLP-Perching Arm ICD




Snapshot of Hardware Progress

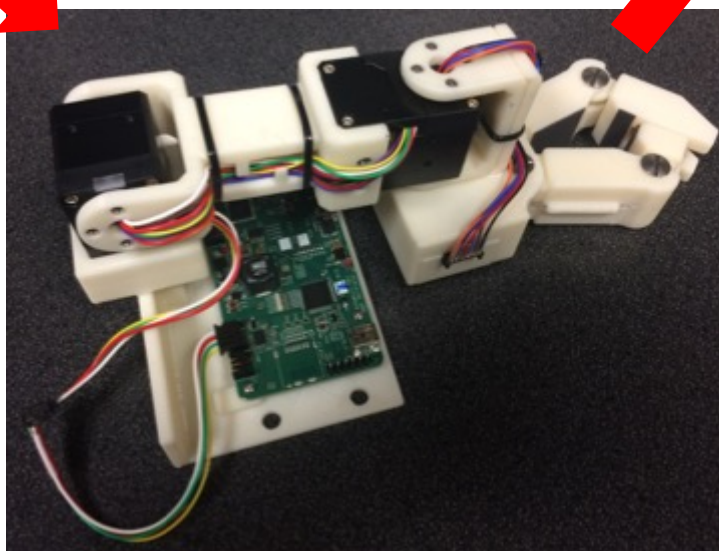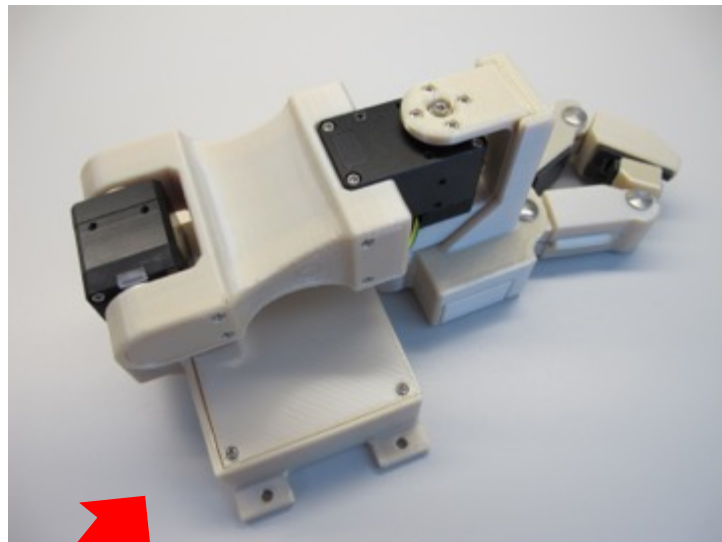
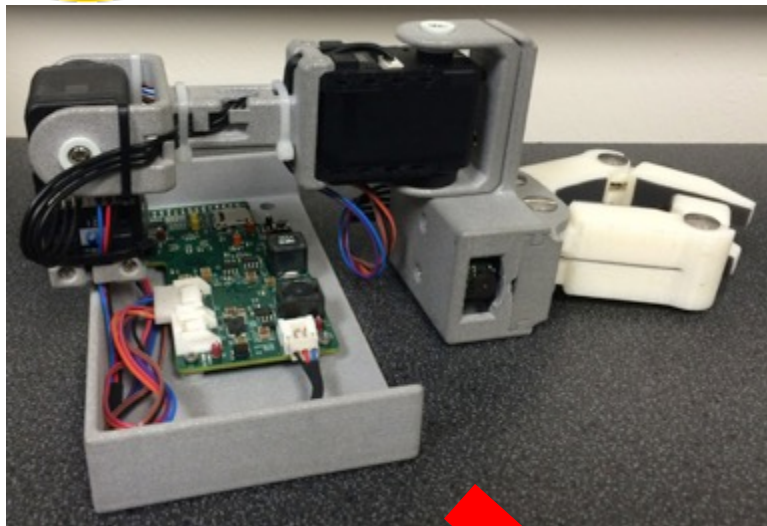




Design

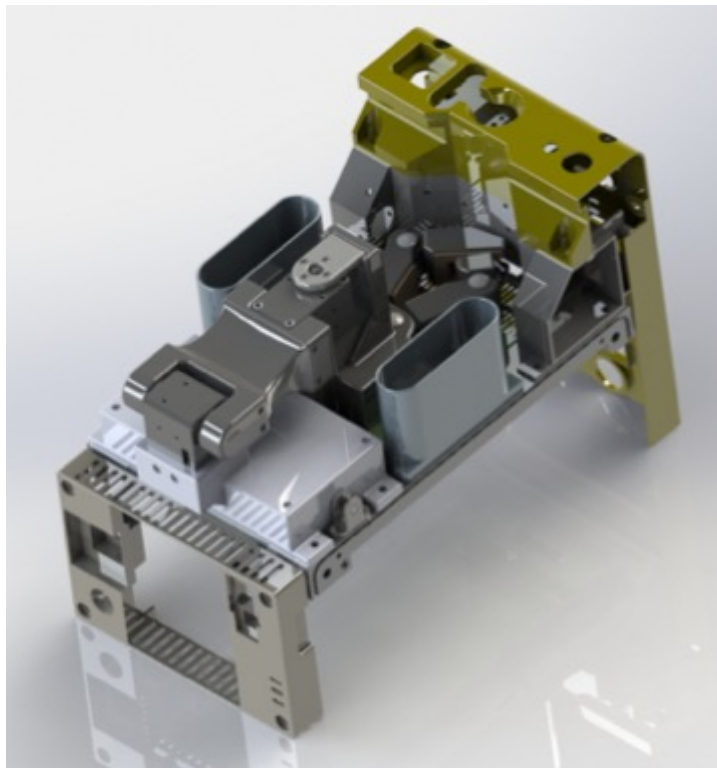

Stowed Configuration
(diagonal view)

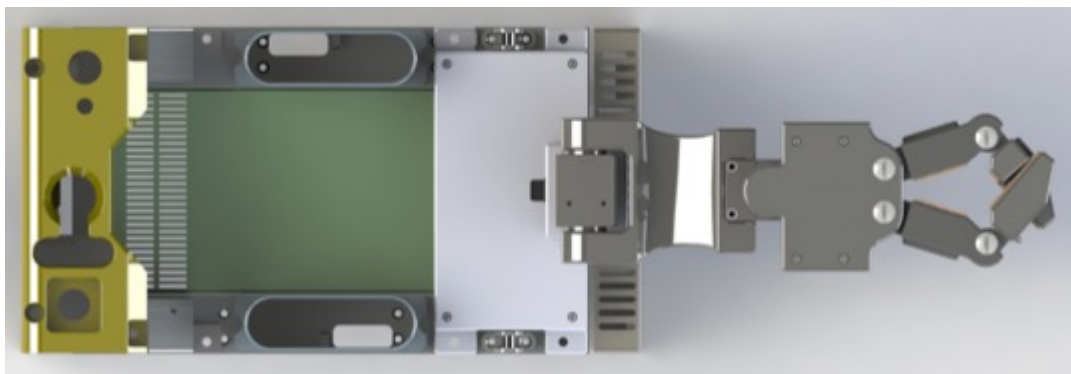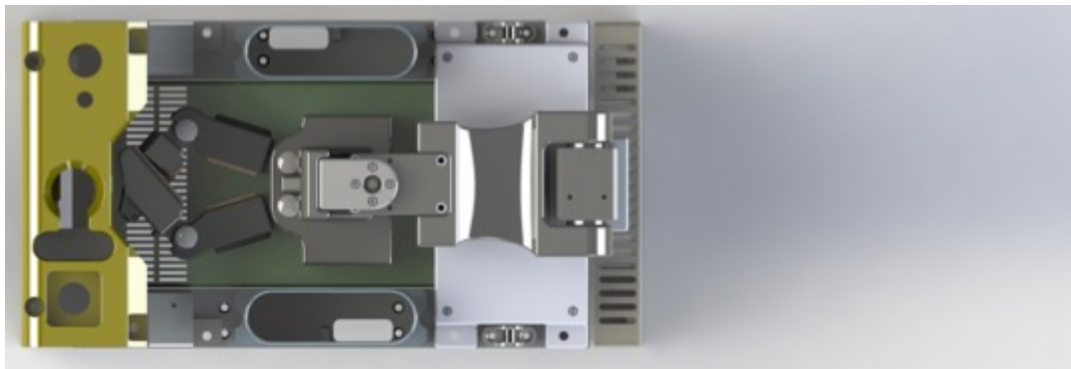


Stowed/Deployed Configuration
(top view)



Component

Arm Proximal Assembly

Arm Distal Assembly

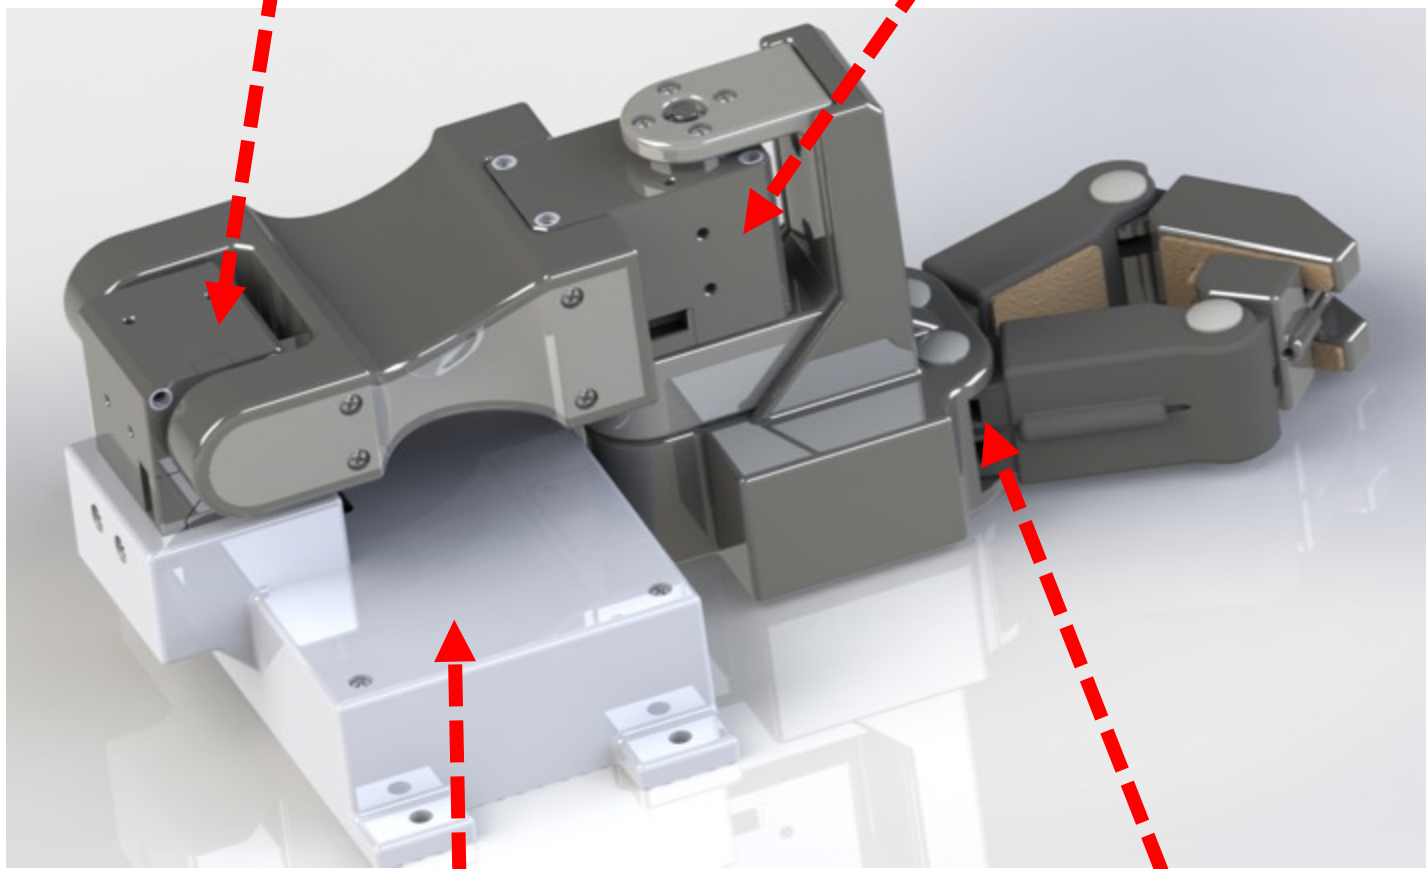


Arm Base Assembly


Gripper Assembly




Gripper

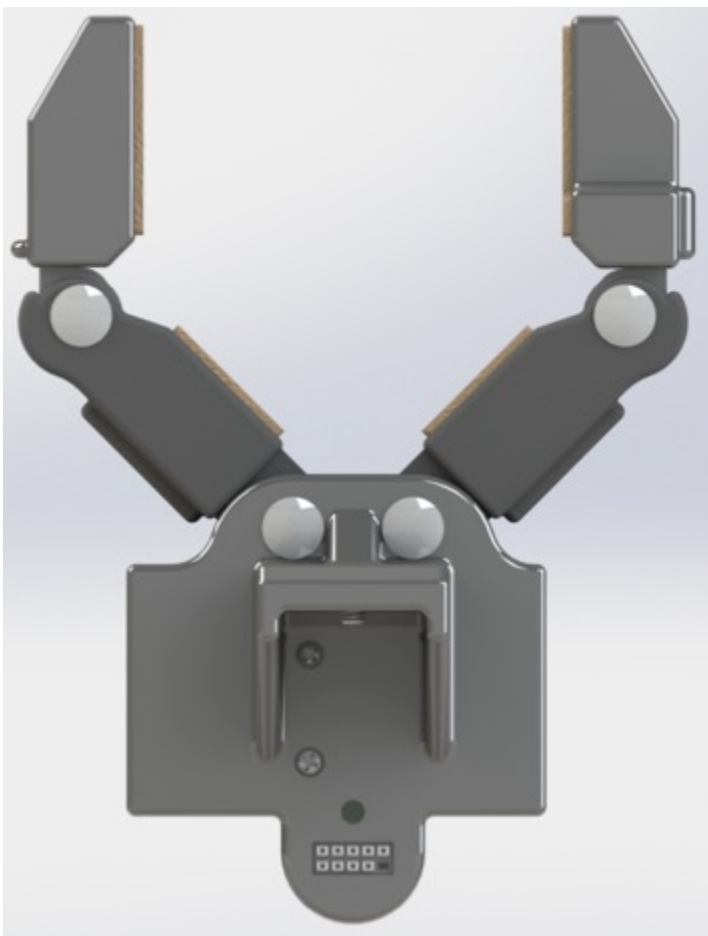

Opened Configuration

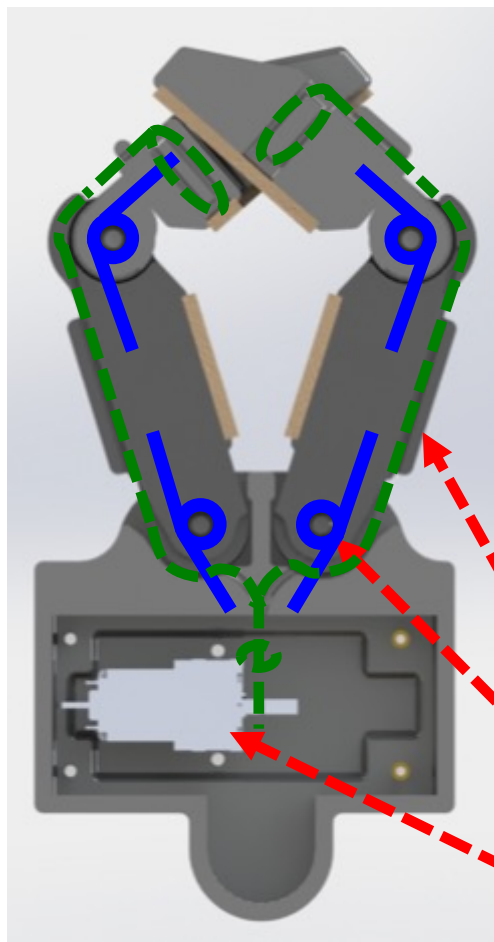

Closed Configuration

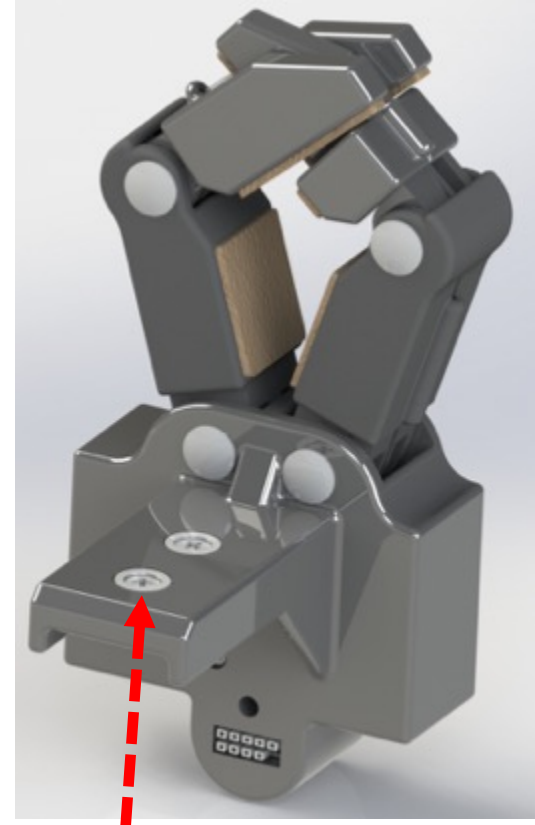

Captive Screw – 2X

Gripper Tendon – 2X

Torsional Spring – 6X

Gripper Motor



Mass

Component		Mass [g]	Comment
Arm	Motor	164.0	2 x motors for pan/tilt joint
	Bolts	4.2	16 x M2-6 bolts, 2 x M3-10 bolts
	Base Plate	181.6	Ultem 9085 density = 1.34 g/cm ³
	Proximal	80.3	
	Distal	27.0	
Gripper	Motor	11.3	
	Spring	2.4	6 x torsional springs
	Binding Post	20.8	4 x binding posts
	Bolts/Cover	1.8	2 x #2 bolts and 2 x nuts
	Palm/Proximal/Distal	165.7	
Controller Board		40.0	
Total		733	1.62 lb

- The mass of P4C perching arm is 460.7 g (1.02 lb) including wires.



Arm Motor

- Robotis Dynamixel XM430-W210-R

- Dimension: 28.5 mm (1.12 in) x 46.5 mm (1.83 in) x 34 mm (1.34 in)
- Weight: 82 g (0.18 lb.)
- Input voltage: 10 V – 14.8 V
- Gear ratio: 210:1
- Stall torque: 3.0 Nm (at 12 V)
- No load speed: 77 RPM (at 12 V)
- Resolution: 0.088 °
- Set position/velocity/acceleration, provide present current
- Enable/disable torque, provide present temperature, limit highest operating temperature, etc.



- ☑ [FFREQ-934] The Perching Arm shall pan 90 degrees in 15 seconds.
- ☑ [FFREQ-935] The Perching Arm shall tilt 90 degrees in 15 seconds.
- ☑ [FFREQ-936] The Perching Arm shall have joint angle resolution of 1 degree.



Gripper Motor


- Pololu Micro Metal Gear-motor
 - Dimension: 10 mm (0.39 in) x 12 mm (0.47 in) x 30 mm (1.18 in)
 - Weight: 9.3 g (0.02 lb.)
 - Input voltage: 12 V
 - Gear ratio: 298:1
 - Stall torque: 0.49 Nm
 - No load speed: 100 RPM
 - Resolution: 0.1 °



www.pololu.com





Block Diagram

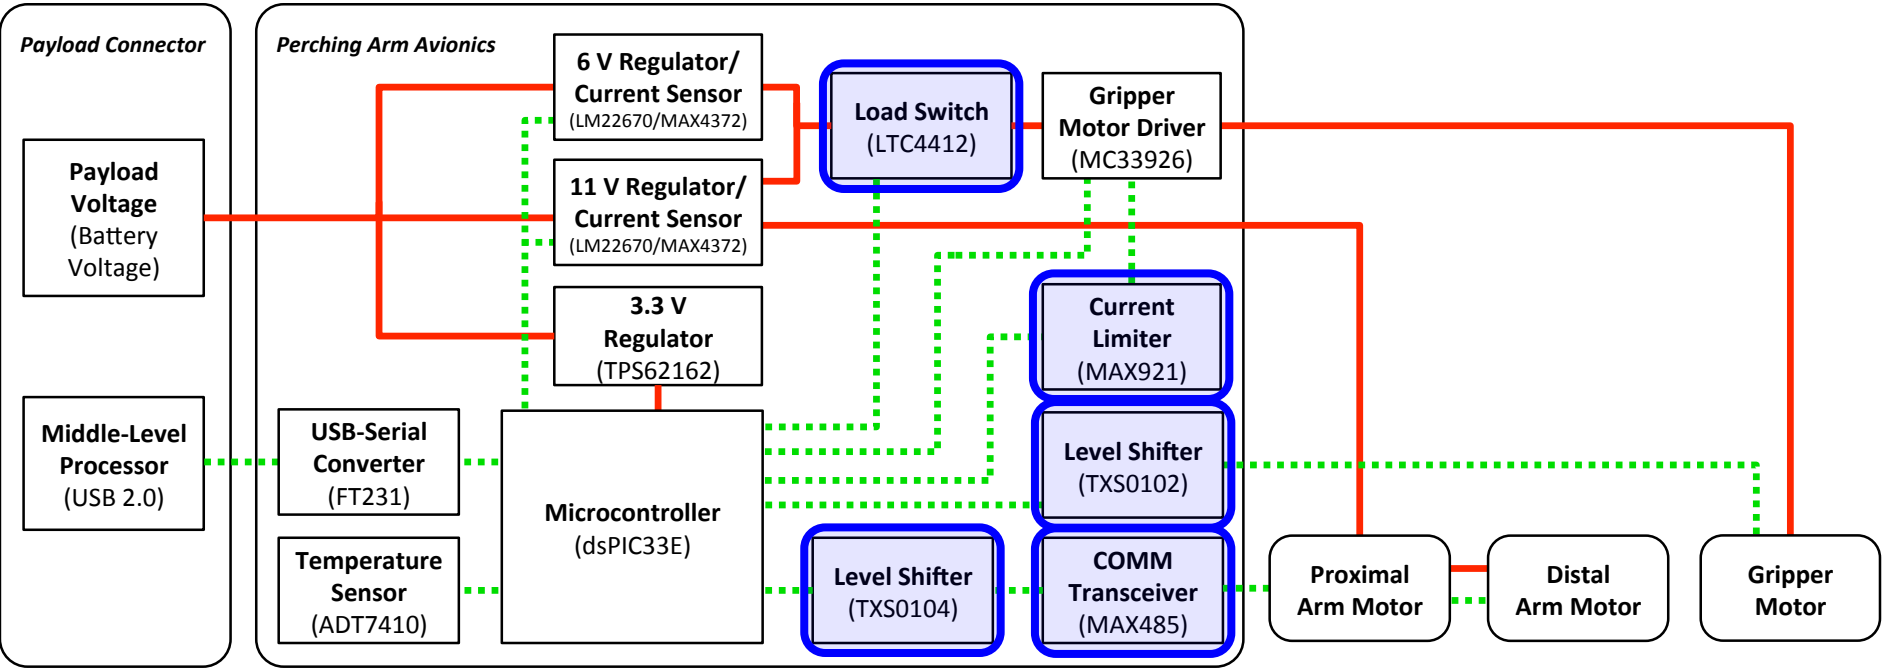



Current Limiter

- MAX921
 - Disable gripper motor power when gripper motor reaches 80% of stall current


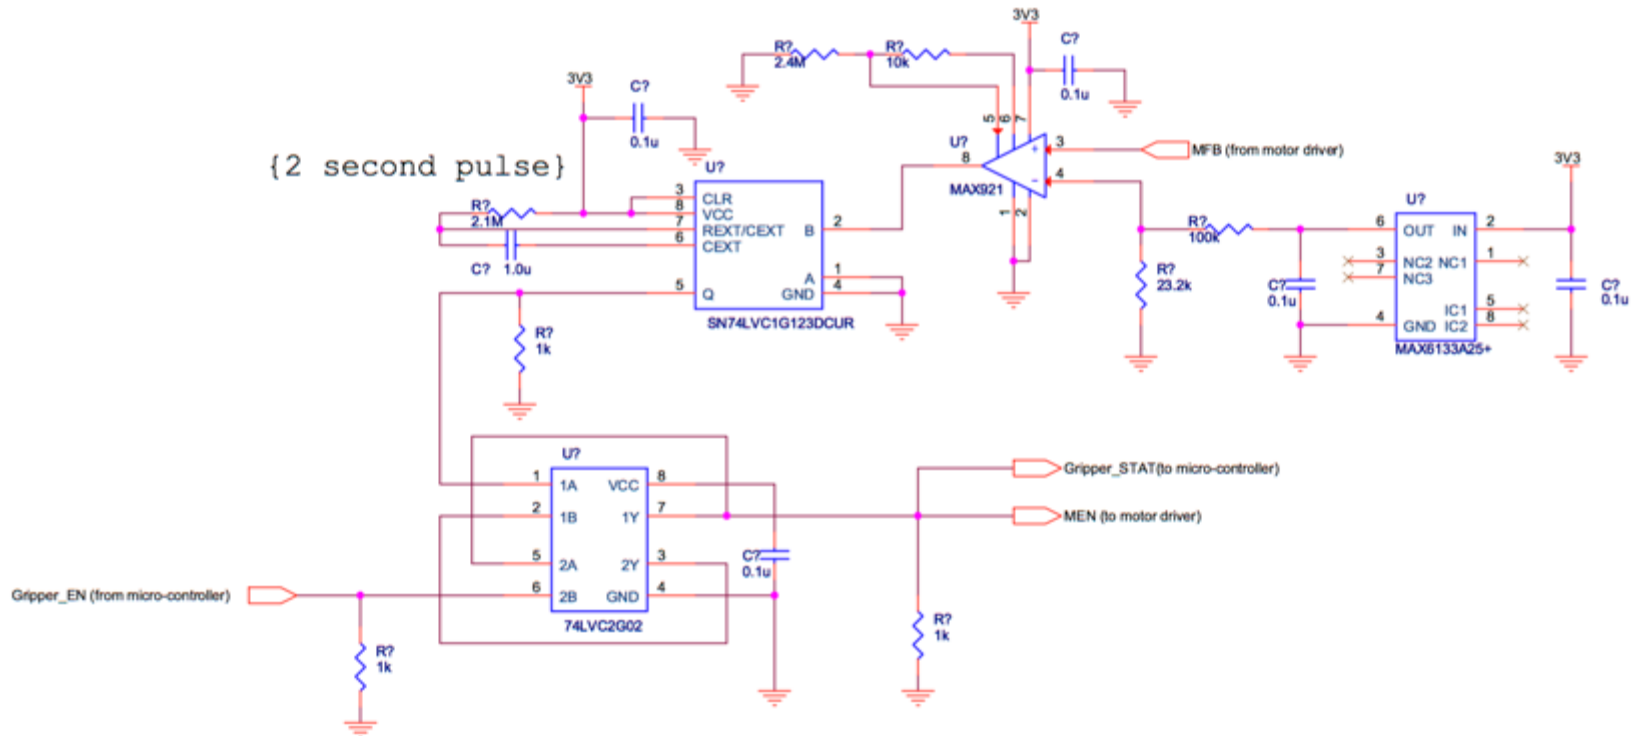
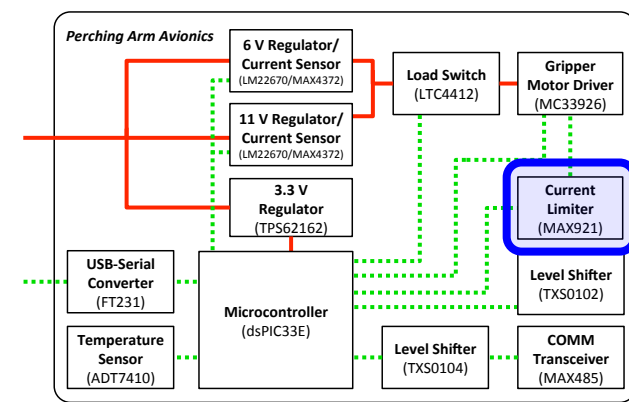




Level Shifter

- TXS0102/TXS0104

- Translate voltage-level of arm motor signals and gripper encoder feedback signals
- Has an internal 10-k Ω pull-up resistor

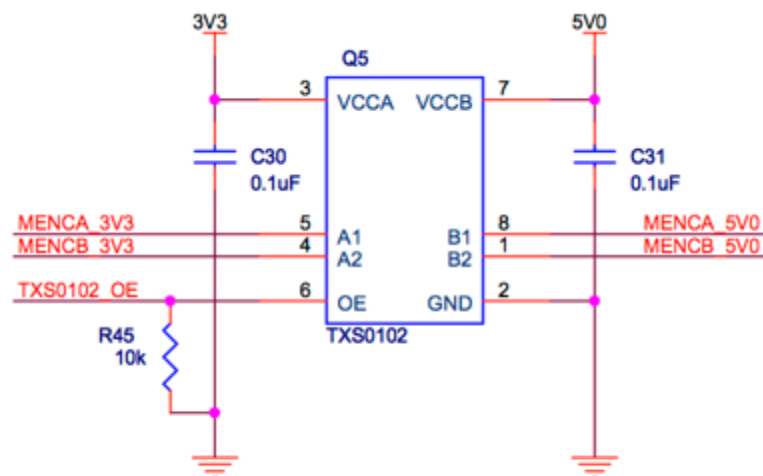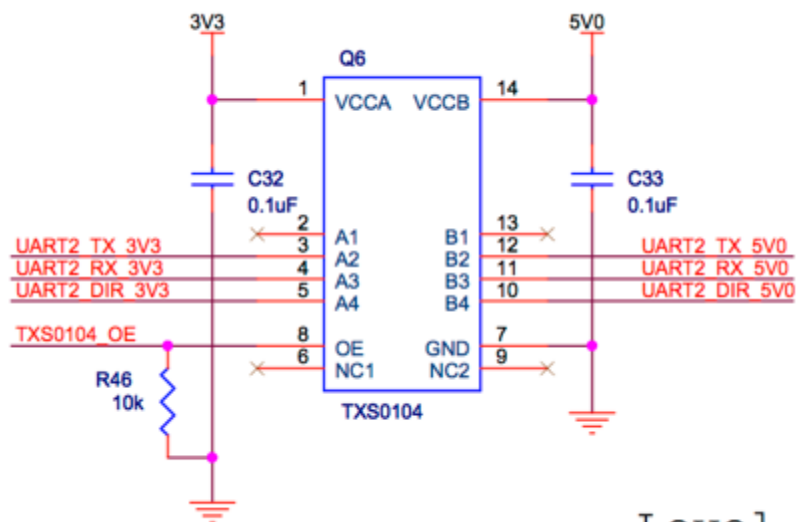
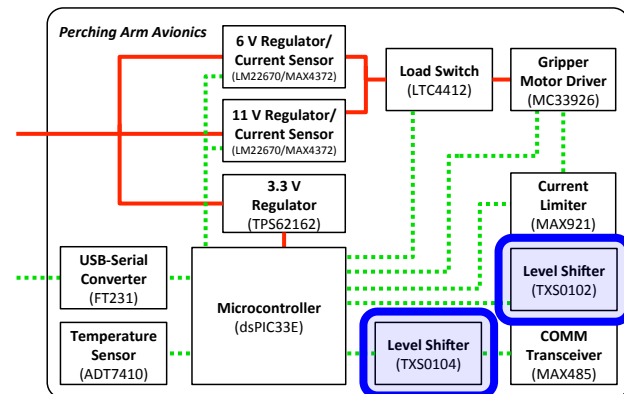


Level Shifter



Arm Motor COMM Transceiver

- MAX485
 - A low-power transceiver for RS-485 communication
 - Allow to transmit up to 2.5Mbps

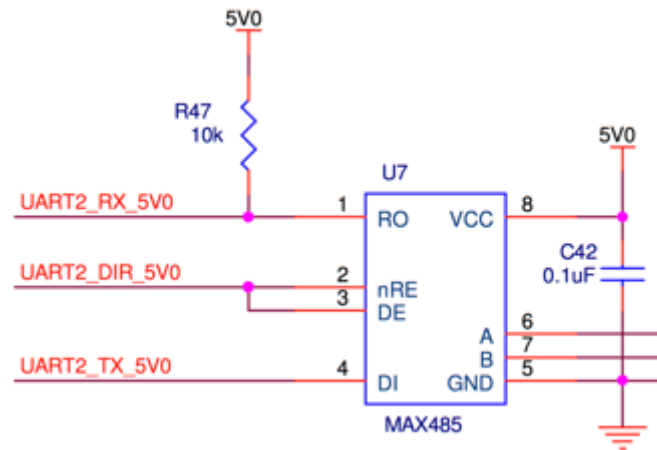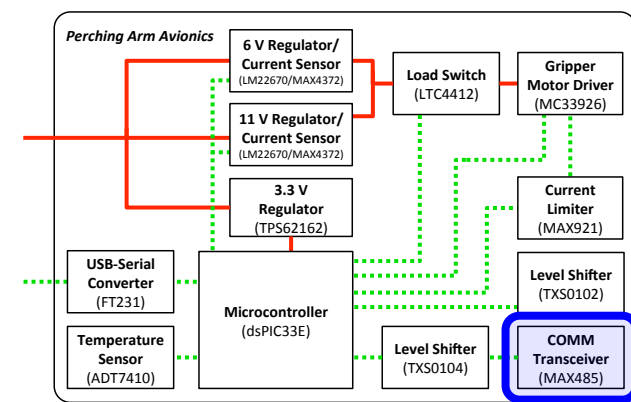

Astrobee Thermal Subsystem



Delta PTR3 Design Overview
1 February 2017



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware.

Component	Maturity / Risk	Forward Work
Core Module	High / Low	None, Cert Unit Testing
Propulsion Blower Motor	High / Low	None, Cert Unit Testing
Nozzle Servos	High / Low	None, Cert Unit Testing
Perching Arm Servos	High / Low	None, Cert Unit Testing
Perching Arm Gripper Motor	High / Low	None, Cert Unit Testing
Dock Avionics	High / Low	None, Cert Unit Testing
Dock Linear Actuator	High / Low	None, Cert Unit Testing



New/Changes from PTR3

Component	New / Changes
Design	<ul style="list-style-type: none">- Removed LLP Heatsink, Wires bundled to minimize airflow pressure resistance in core;
Hardware	<ul style="list-style-type: none">- No Thermal Fuses; Added Perching Arm gripper DC motor current limiter; Nozzle servos covered;




Thermal Management Plans

COMPONENT	THERMAL MANAGEMENT
Central Module <ul style="list-style-type: none"> Avionics Boards Fore/Aft LED Lights Touch Screen, Status Lights, Etc. 	<ul style="list-style-type: none"> Forced convection (fans mounted in core). Current Limit, Temp Sensors, Conduction to aluminum frame / forced convection. Conduction to forward panel and frame. Heat rejection to central core (forced convection) and environment (conduction/convection/radiation).
Top Forward Module <ul style="list-style-type: none"> Laser Pointer, Cameras, Etc. 	<ul style="list-style-type: none"> Low power and/or infrequent operation: Conduction to panel and frame. Rejection to central core and environment.
Prop Module (2) <ul style="list-style-type: none"> Impeller Motor PMC Board Nozzle Servos 	<ul style="list-style-type: none"> Conduction to aluminum plenum floor; forced air rejection via nozzles. Conduction to plenum floor. Heat rejection by forced air in central module. Conduction to structure. Rejection via plenum air flow.
Perch Arm <ul style="list-style-type: none"> Arm Controller Board Joint Servos Gripper DC motor 	<ul style="list-style-type: none"> Conduction to structure; rejection via conduction/convection/radiation. COTS Firmware Temperature limit; Conduction to structure; rejection via conduction/convection/radiation. Load Switch and Current Limiter
Dock <ul style="list-style-type: none"> Avionics Boards and DC-DC converters Linear Actuators 	<ul style="list-style-type: none"> Forced convections (fan mounted on Dock face) COTS Firmware Current Limit; Conduction to structure; rejection via conduction/convection/radiation.
Batteries (4)	Low thermal power. Conduction to structure; rejection via core forced air. Direct rejection to environment via conduction/convection/radiation.



Central Module Heat Sources

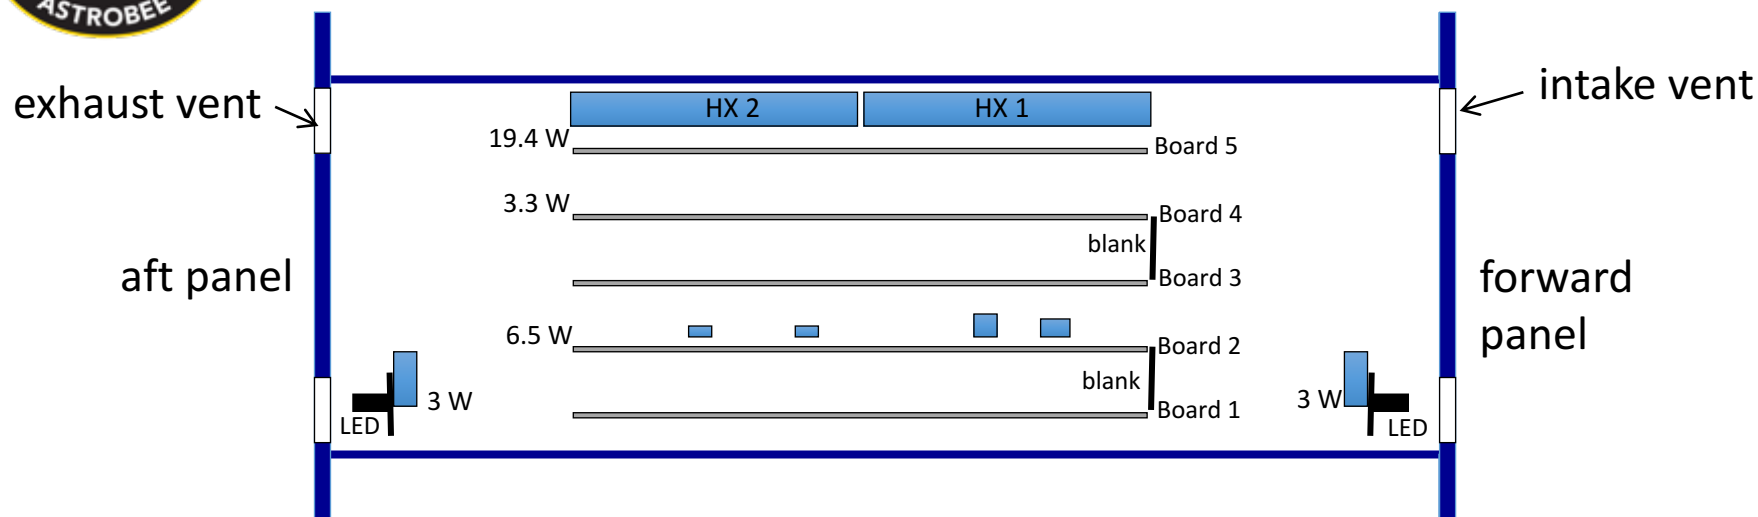


- Most of the heat is produced on Board 5 (MLP, HLP).
- Heat produced by Boards 1 and 3 is negligible. Flow to those boards can be restricted: Plastic strips attached to board stand-offs. However, this would increase the overall ΔP .
- Forward and aft LED lights: Heat sink to aluminum frame; frame cooled by air flow, thermal radiation from top/bottom/front/back panels. Finned heat sinks can be used as well.




Current Design

Additional Core Air Inlet
May be deleted if unnecessary

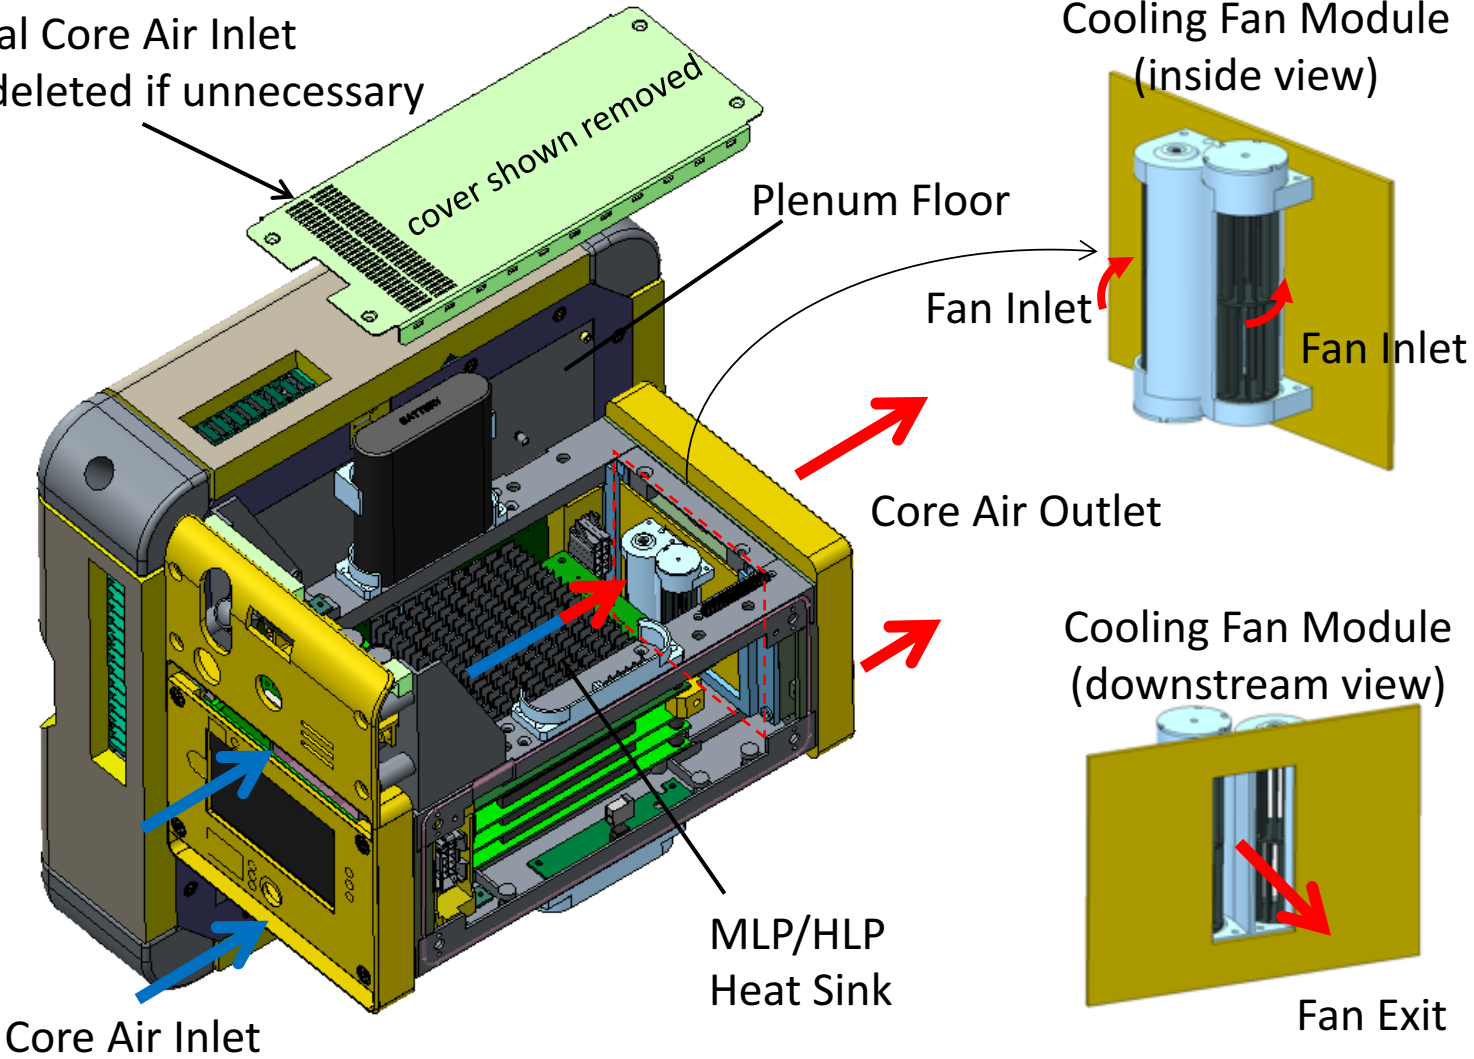




Current Design (Side View)

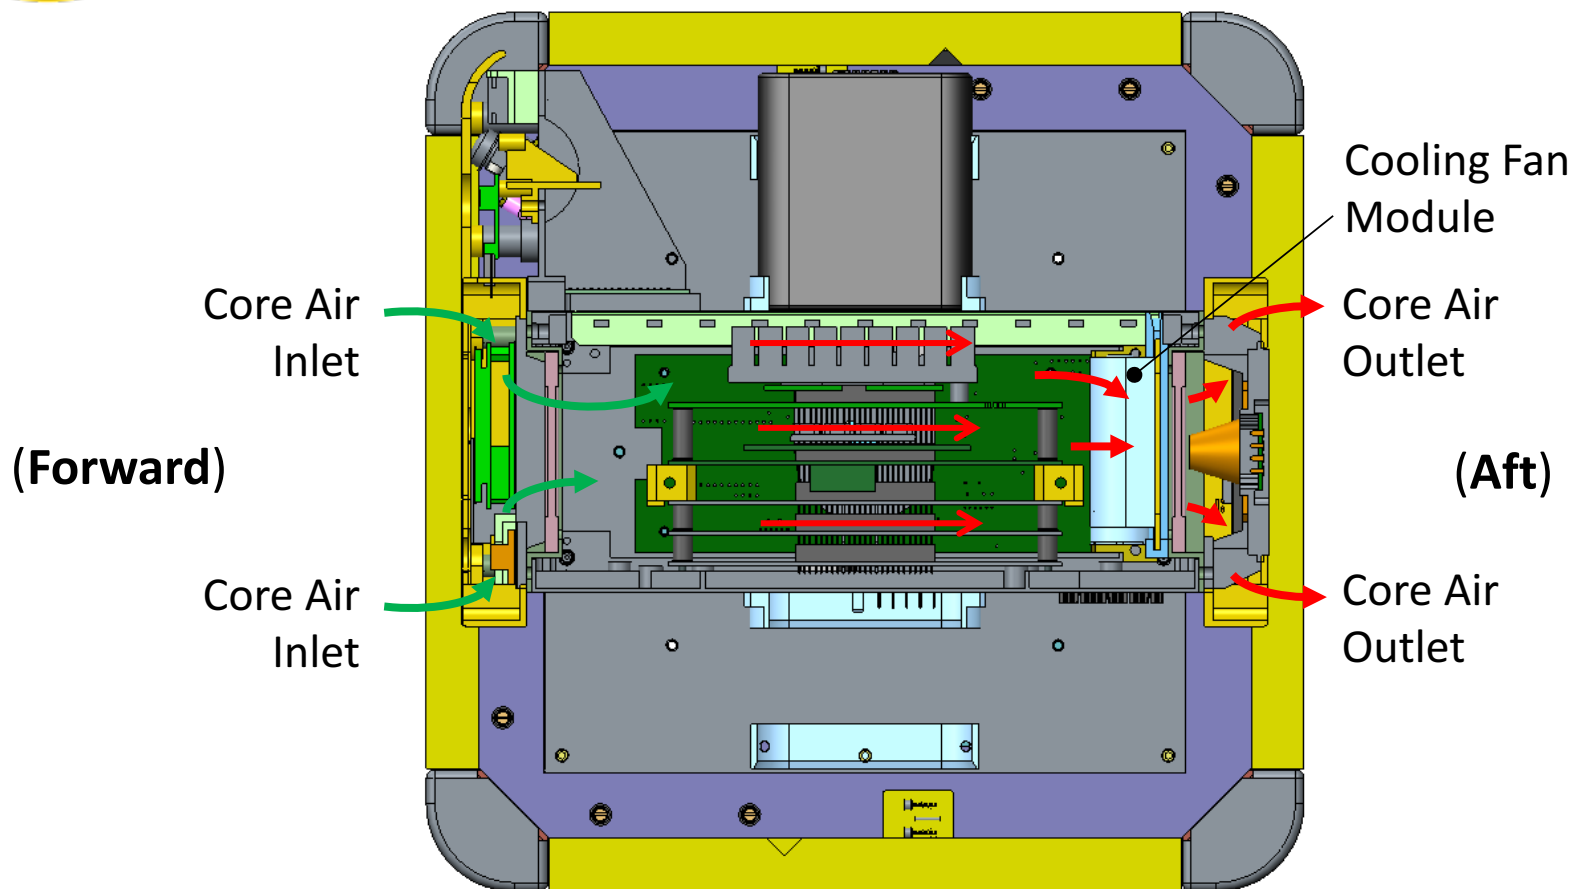


Core cooled by forced air convection, driven by two aft-mounted cross-flow fans.



Core Airflow Baffles

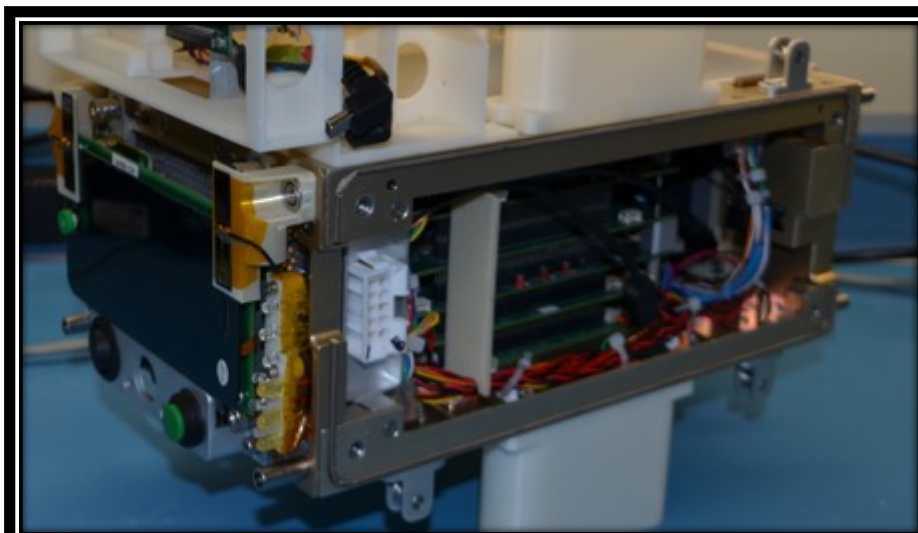

Left Side Baffle

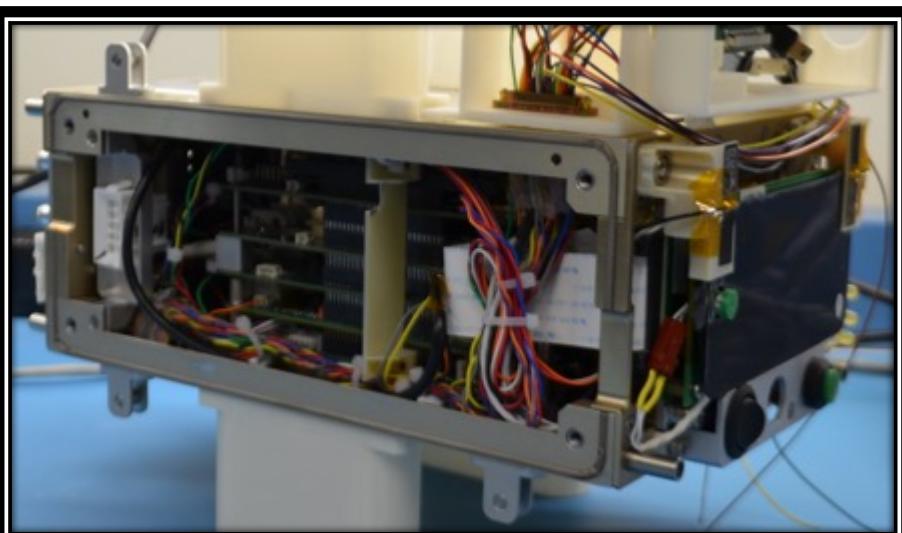



Right Side Baffle

Baffles prevent air flow circumvention of avionics boards.



Thermal Management Propulsion Modules

- Mount prop motor to aluminum floor of plenum.
- Max air speed in plenum is ~ 31 ft/s (near fan shaft at center of plenum).
- At max motor power, must reject 3 W (based on efficiency of motor).
- This requires a turn-over of ~ 1 CFM to remove the heat from the plenum (with the exhaust temp well below the max touch temperature).

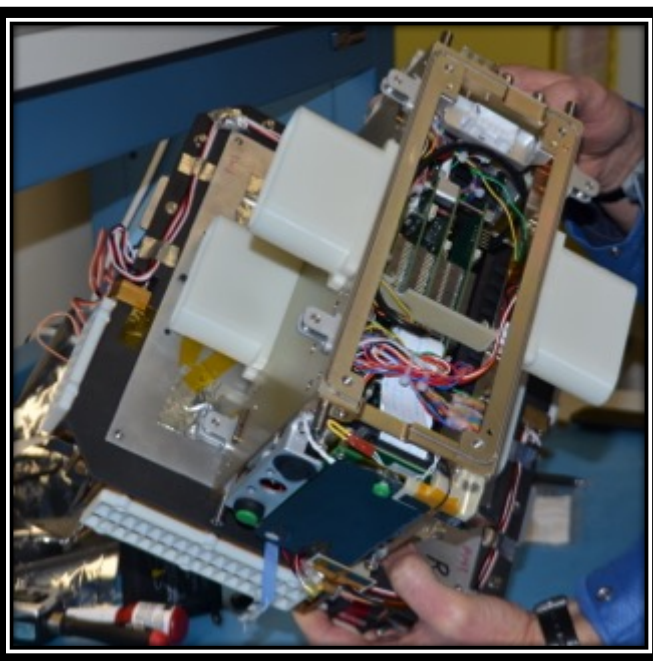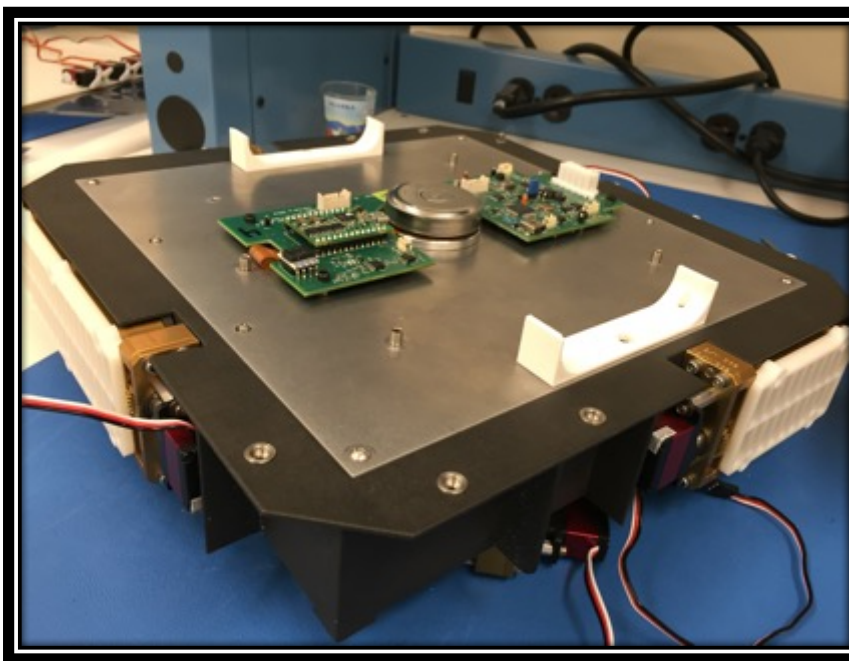




Perching Arm Servo, Gripper DC Motor, Dock Actuator

- Perching Arm Servo
 - Measured Continuous Operation Temperature less than 40°C
 - Temperature Limit Set 35°C in Firmware for Stall
 - Tested Temperature Limit Shutoff-Passed
- Gripper DC Motor
 - Added 80% Current Limiter (previously discussed in Perching Arm Design Overview)
- Dock Linear Actuator
 - Current Limiter for Stall Condition



Dock Air Flow

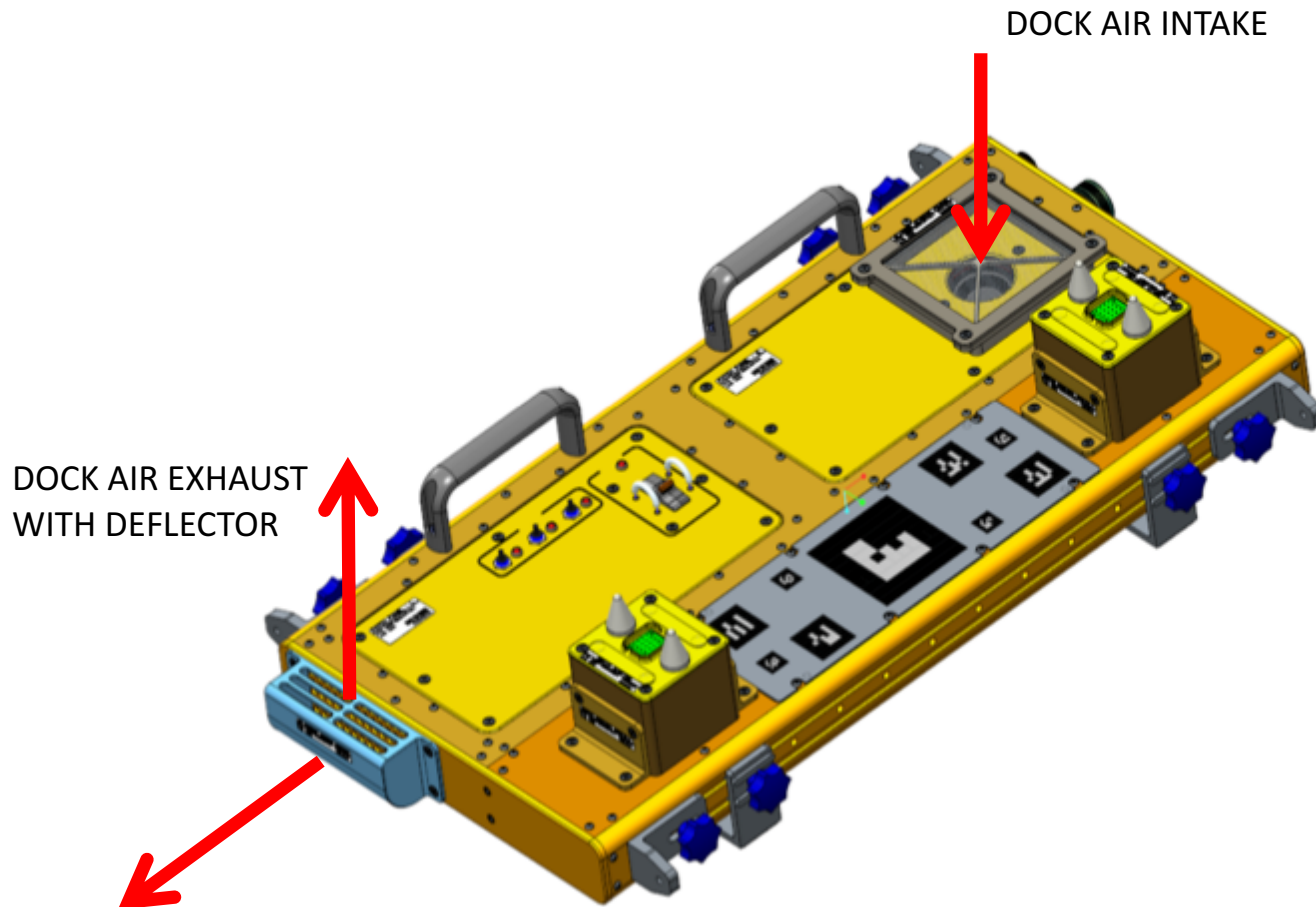

DOCK AIR INTAKE

DOCK AIR EXHAUST
WITH DEFLECTOR

DOCK AIR EXHAUST IF DEFLECTOR IS REMOVED

SANYO DENKI
rated to 12.7 CFM
3000 RPM

DC Blower
75X75X30





Safety Features

- Cooling fans always on—no software control (firmware).
- If forward/aft LED lights temperature limit exceeded, hardware over temperature power cut-off engages.
- Forward/aft LED lights recessed from panels, not touchable.
- If processor temperature limit reached, processor operating system throttles power.
- Fail-safe: If system temperature sensor limit is exceeded, hardware over temperature cut-offs entire system power.

Astrobee Dock Mechanical Subsystem



Design Overview



Design Maturity

Component	Maturity / Risk	Forward Work
Dock housing	High/Low	Select dock color
AR Targets	Med / Low	Change attachment mechanism and target size
Bonding Strap	Med / Low	Attachment location




New/Changes from PTR3

Component	New / Changes
Dock	<ul style="list-style-type: none">- Reduced the overall width of the Dock due to removal of battery charger.
Dock	<ul style="list-style-type: none">- Added an additional patch panel to accommodate more electrical components
Dock	<ul style="list-style-type: none">- Added air vent deflector to direct thermal exhaust
Berth post	<ul style="list-style-type: none">- New Modular attachment Bracket for Tilt and Non-Tilt Option
Berth post	<ul style="list-style-type: none">- Lances change from horizontal to vertical alignment
Dock mounting	<ul style="list-style-type: none">- Added additional attachment points for mounting brackets (velcro / seat track)




ISO View – Dock

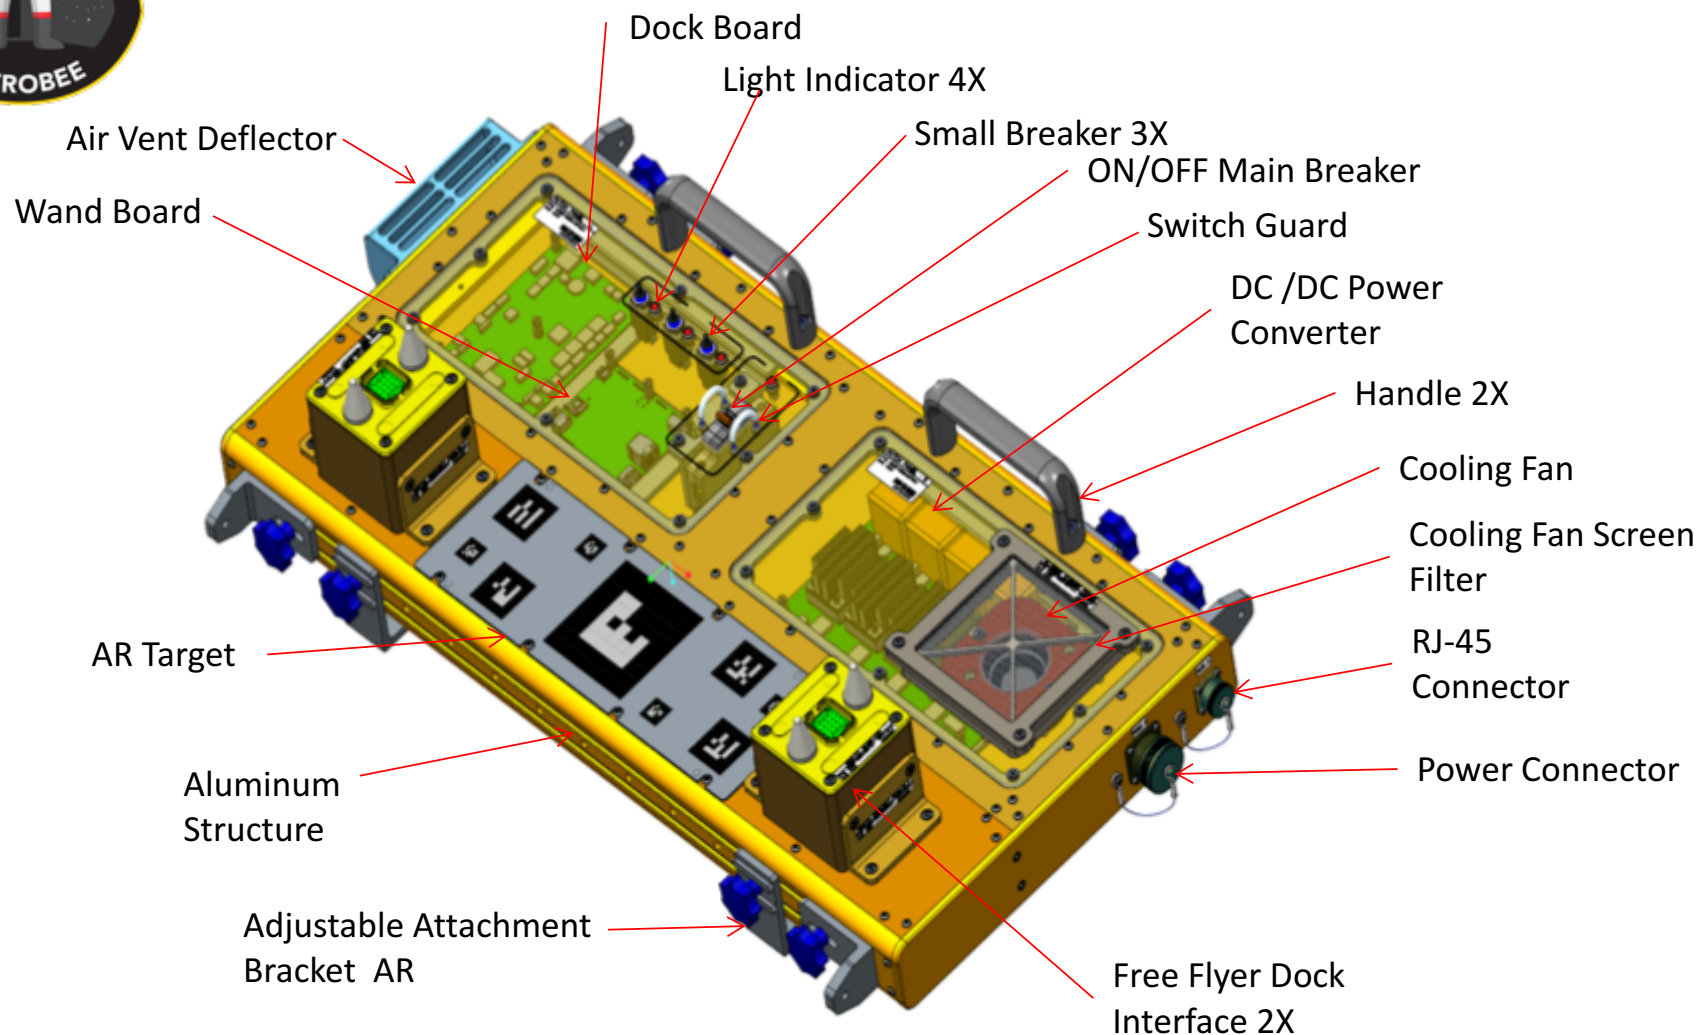

Patch Panel Covers are Shown Transparent For Clarity



Dock Air Flow

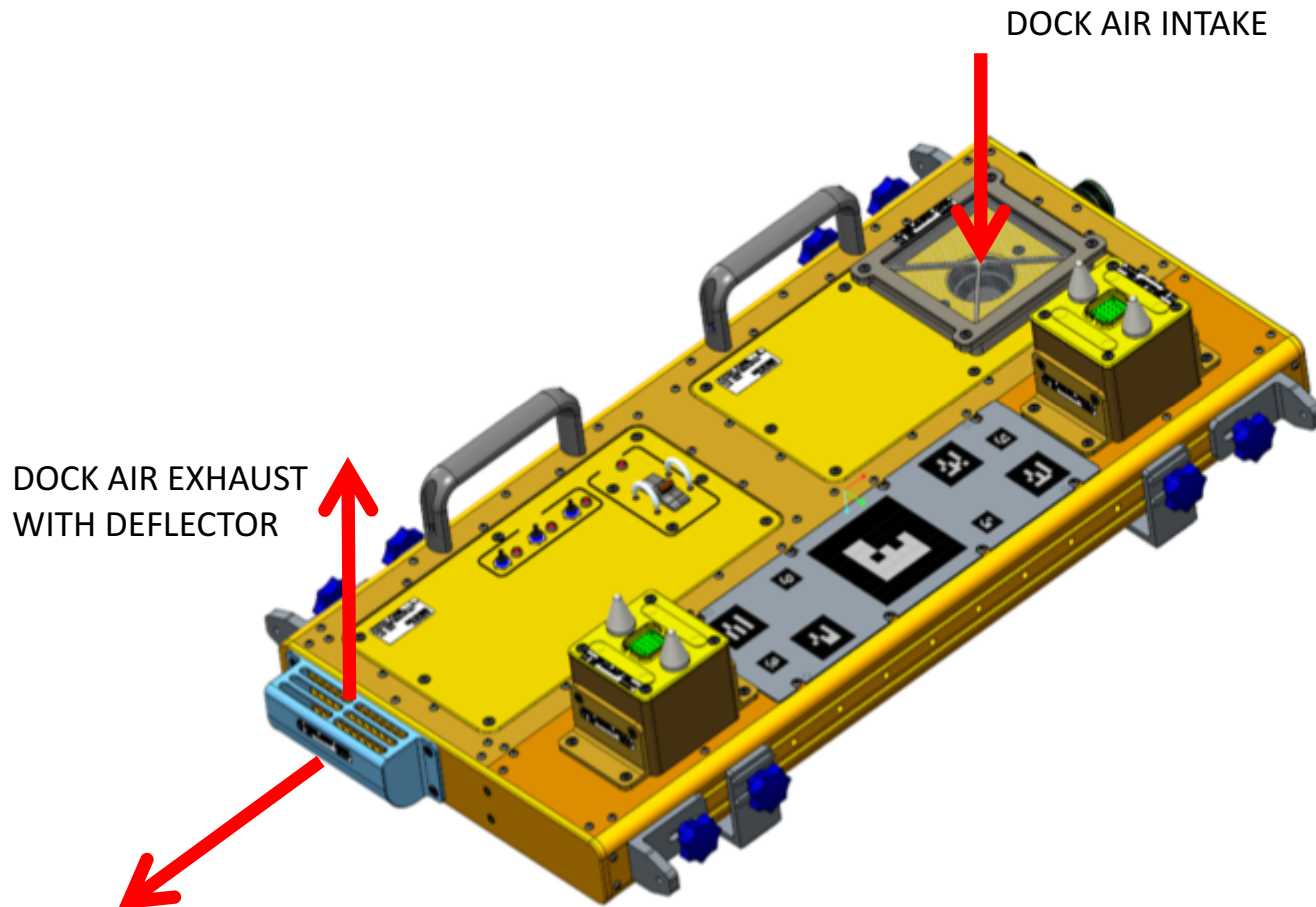

DOCK AIR INTAKE

DOCK AIR EXHAUST
WITH DEFLECTOR

DOCK AIR EXHAUST IF DEFLECTOR IS REMOVED

SANYO DENKI
rated to 12.7 CFM
3000 RPM



DC Blower
75X75X30





Dock


Front and Side View

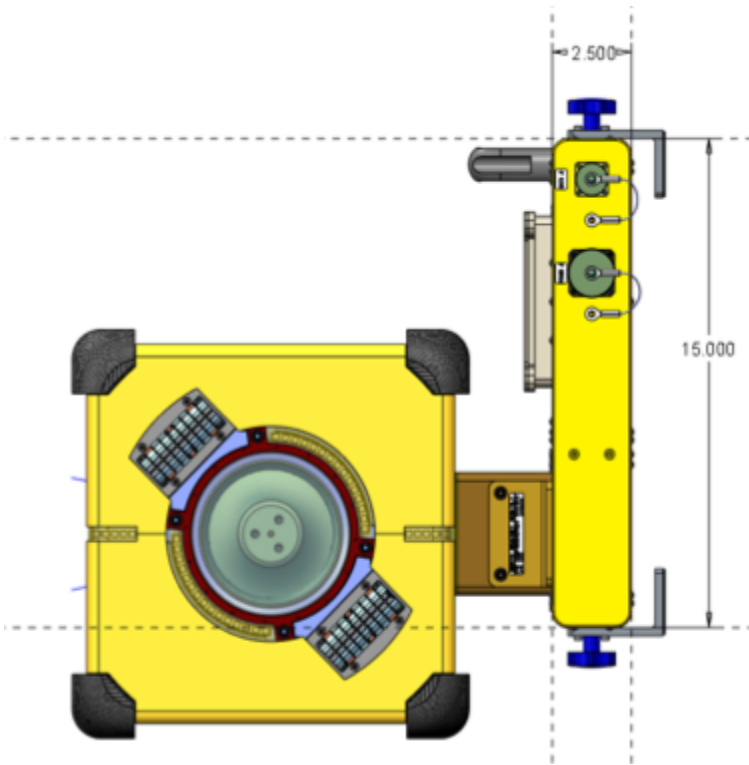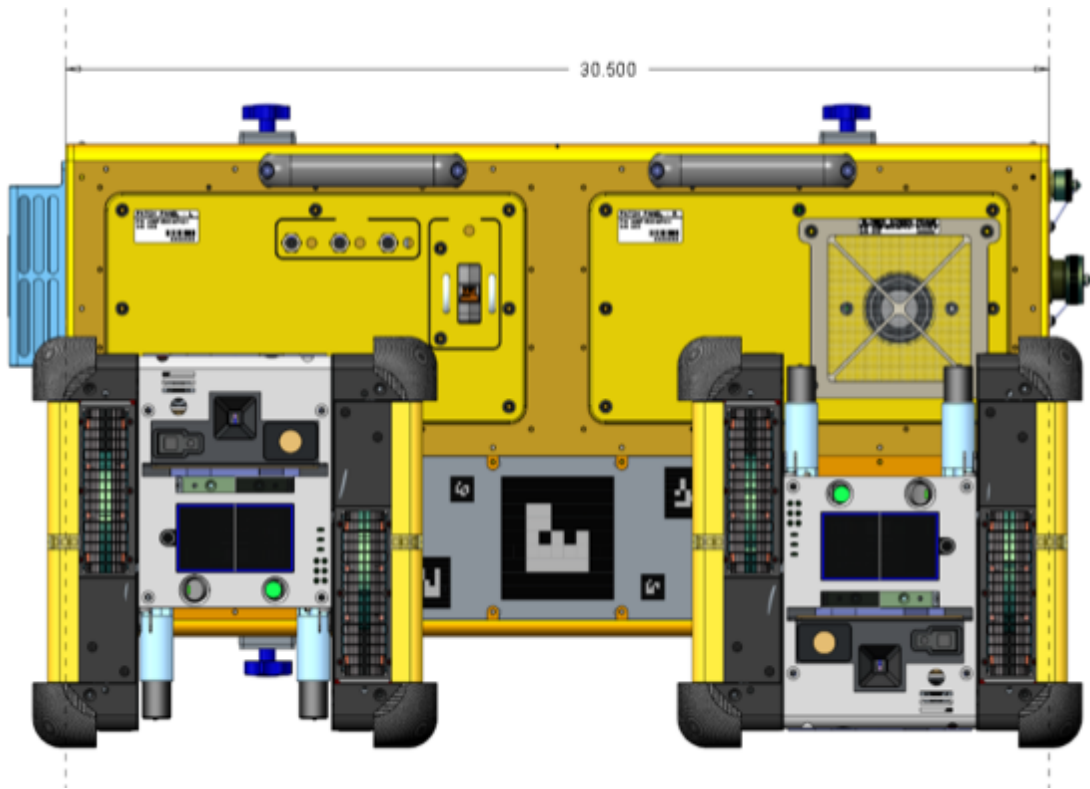

NOTE: Dimensions are in inches




ISO View
Dock –Flyer-Human

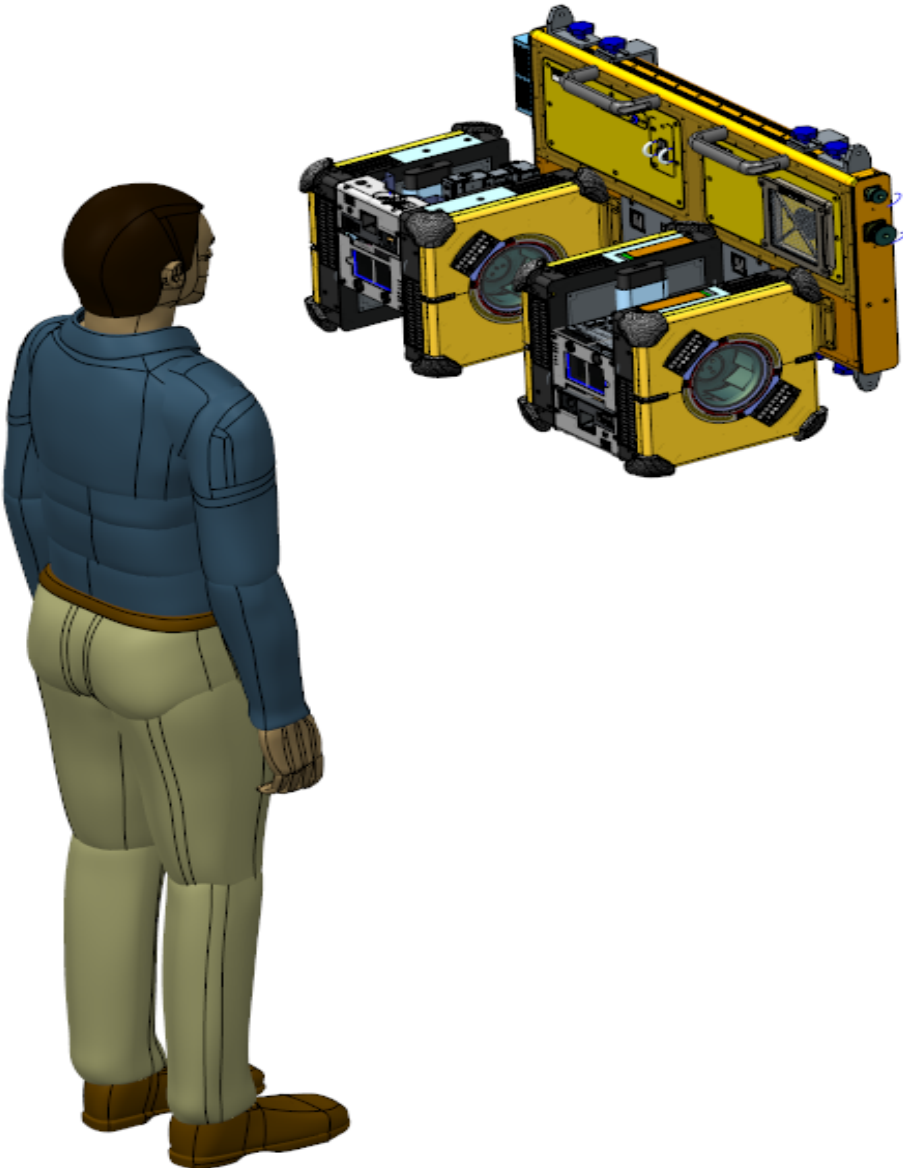





Dock

Front View With no attachment Brackets

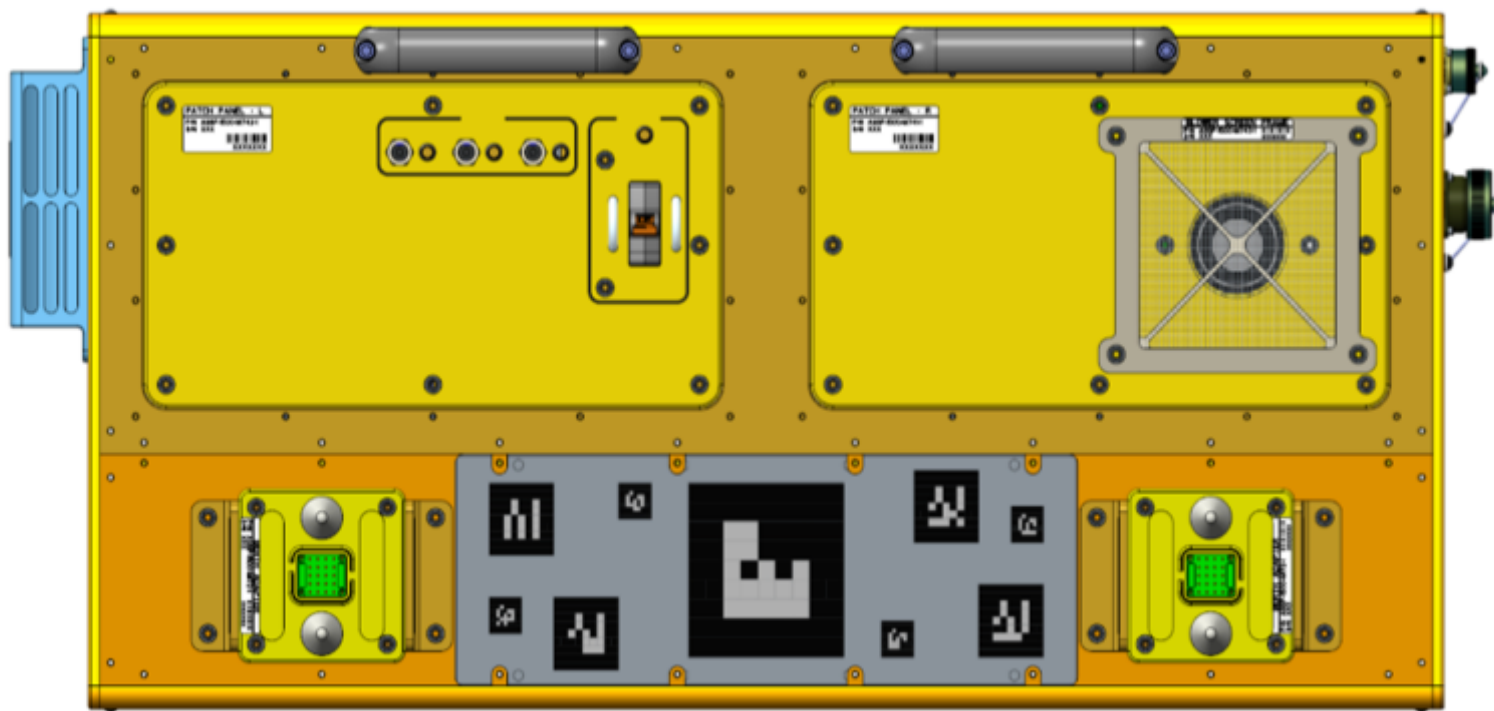





Free Flyer Dock Interface Front Side

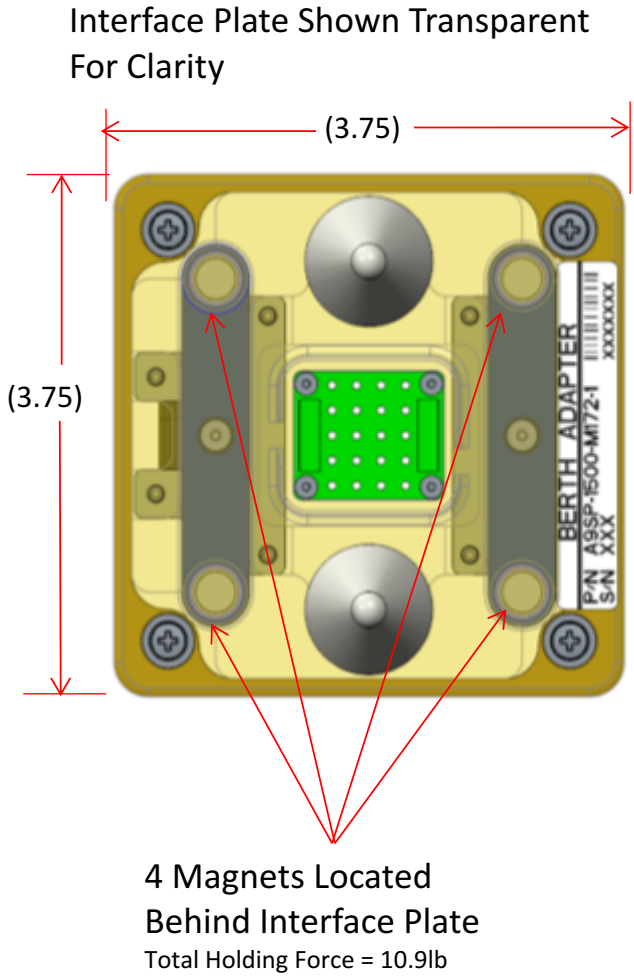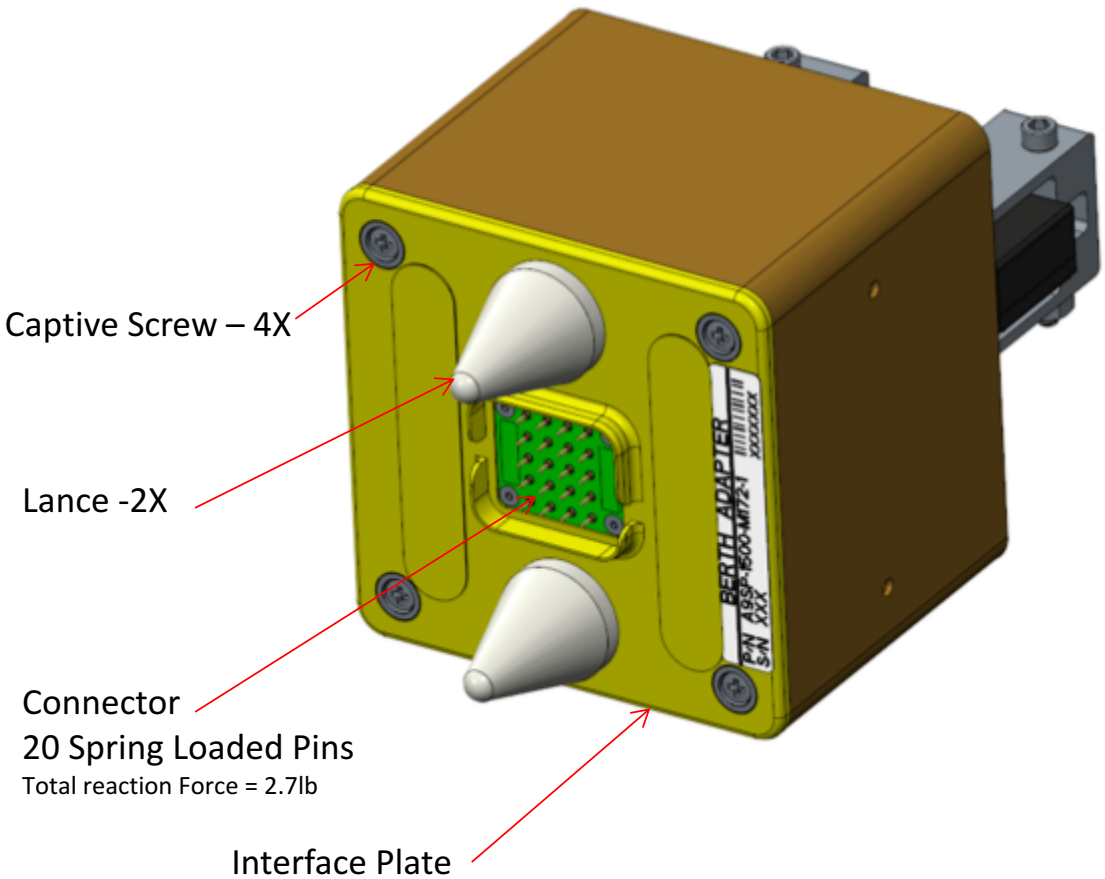



Free Flyer Dock Interface Plate Back Side

Magnet
KJ Magnetics

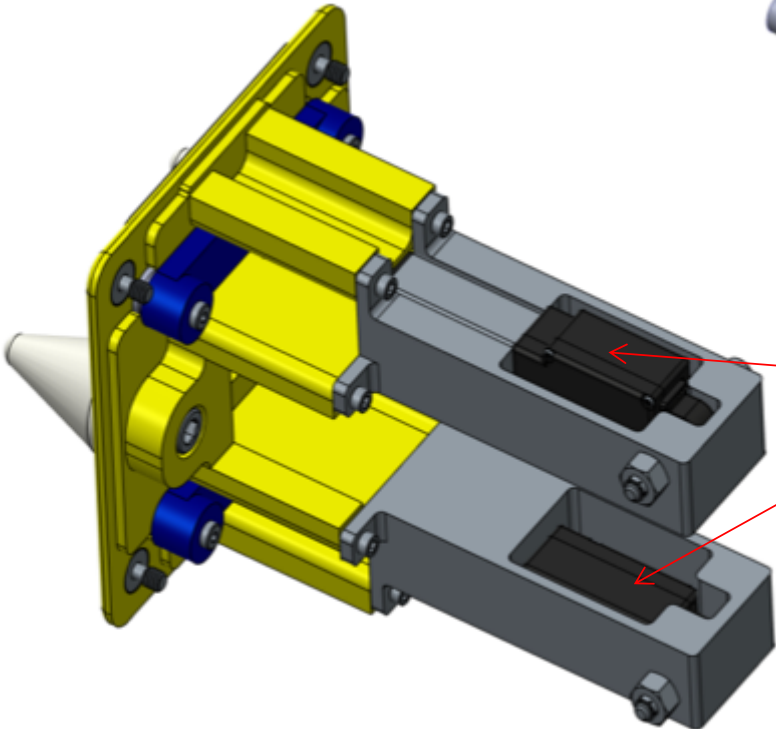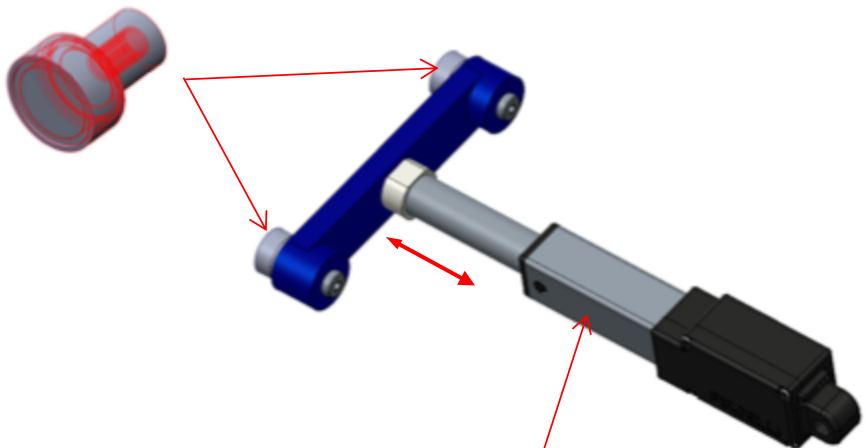

Linear Actuator
2X
L12-I FIRGELLI
30mm Stroke
210:1

L12 Specifications				
Gearing Option	50:1		100:1	210:1
Peak Power Point	12N @ 11mm/s	23N @ 6mm/s	45N @ 2.5mm/s	
Peak Efficiency Point	6N @ 16mm/s	12N @ 8mm/s	18N @ 4mm/s	
Max Speed (no load)	23mm/s		12mm/s	5mm/s
Max Force	12N		23N	45N
Back Drive Force	43N		80N	150N
Stroke Option	10 mm	30mm	50mm	100mm
Mass	28 g	34 g	40 g	56 g
Repeatability -L-R-P(LAC)	±0.1 mm	±0.2 mm	±0.3 mm	±0.5 mm
Max Side Load	50 N	40 N	30 N	15 N
Closed Length hole to hole	62mm	82mm	102mm	152mm
Input Voltage	0-7.5V , 6 VDC Rated		0-13.5V, 12 VDC Rated	
Stall Current	550mA @ 6V		220mA @ 12V	
Operating Temperature	-10°C to +50°C			
Storage Temperature	-30°C to +70°C			
Duty Cycle	20 %			
Lifetime	20,000 strokes			
Audible Noise	55dB @ 45cm			
Ingress Protection	IP-54			
Feedback Potentiometer	1/8W Non-Buffered 1 kΩ -20kΩ Potentiometer			
Limit Switches	-L,-R,-P	Max. Current Leakage: 8uA		
Standby Current	-I/-R	7.2mA	3.3mA	

Astrobee Dock Avionics



Design Overview



Design Maturity

Dock Avionics

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

Component	Maturity / Risk	Forward Work
Controller board	High / Low	New I2C lines
DC/DC board	Low / Med	New board
Dock adapter board	High	
Dock Processor	High	New Wandboard
Actuators	High	




New/Changes from PTR3

Component	New / Changes
DC/DC	- Reverting back to our original design
Smart Dock	- New Dock Processor
COTS Charger	- Removed from dock



Dock Avionics Diagram

ISS Network

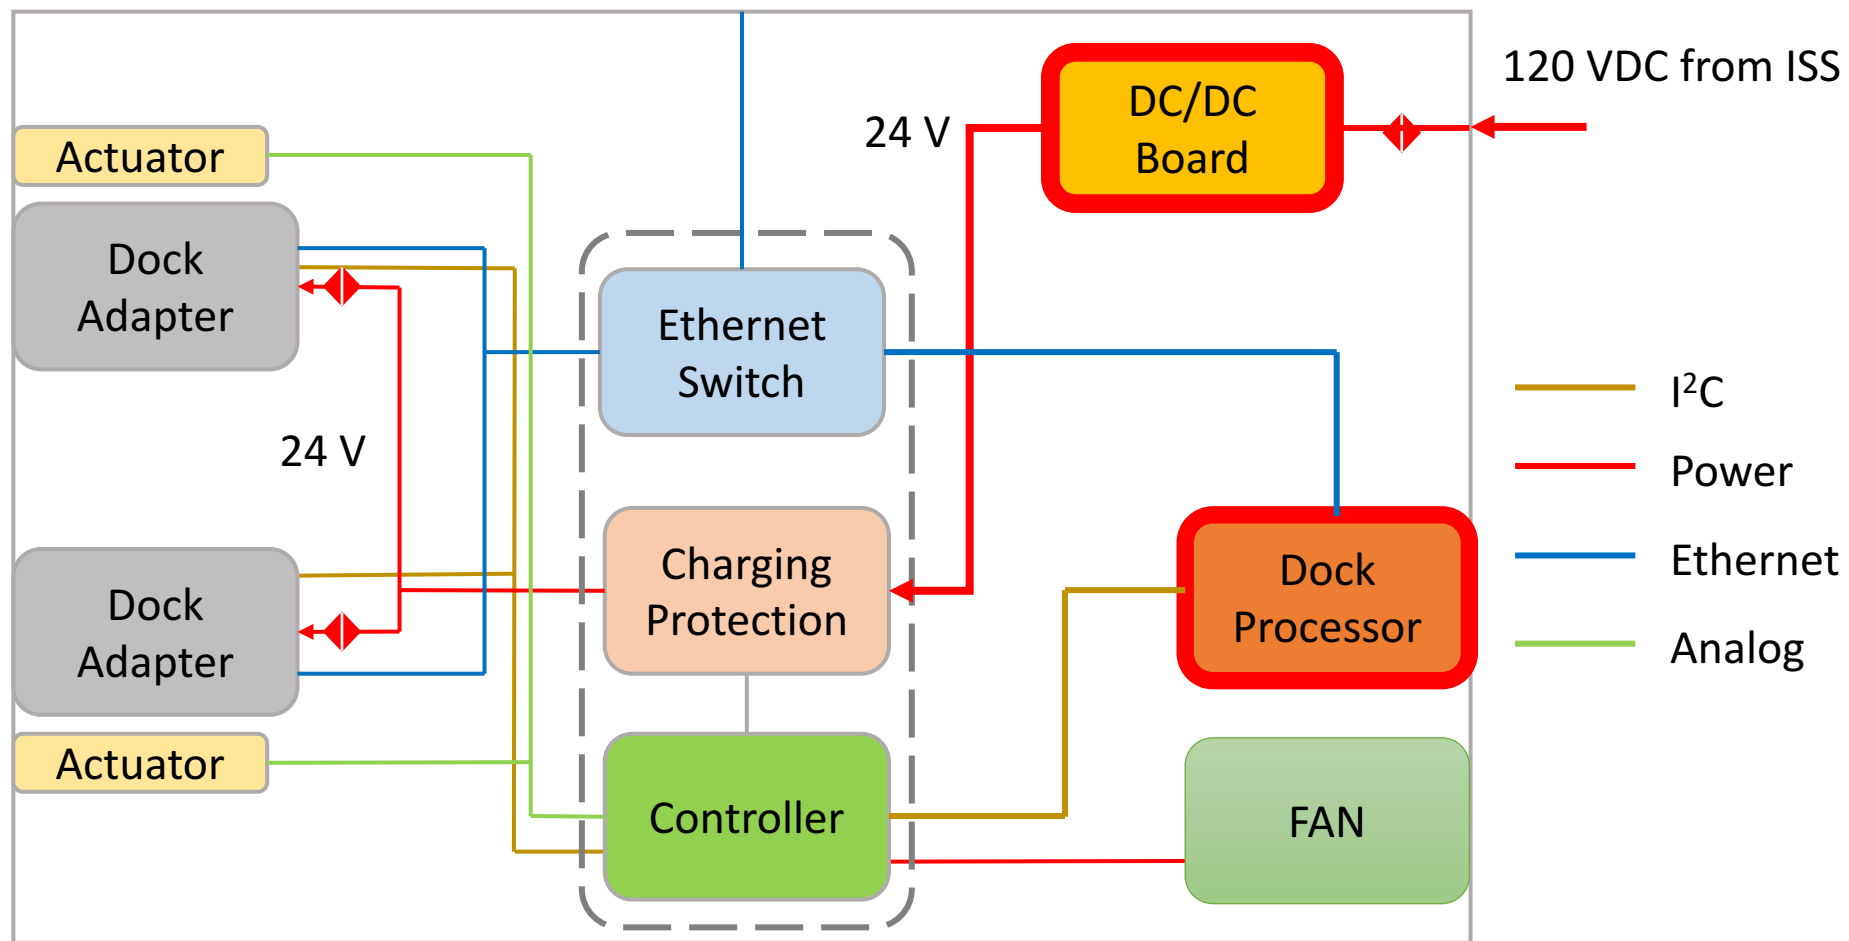

◆ 3-A Circuit breaker



Dock Processor

- Same Processor as LLP
- FW updates for Dock PIC
- Remote wake up of Astrobee
- Publish Dock telemetry
- Ubuntu



Astrobee GDS Subsystems



Design Overview




Components

- Control Station
 - Provide GUI for a remote user to command and control Astrobee during nominal operations
- Ground Server
 - Store Astrobee data and make it available to external users
- Engineering Tools
 - Provide tools for debugging and advanced engineering support



Architecture Diagram

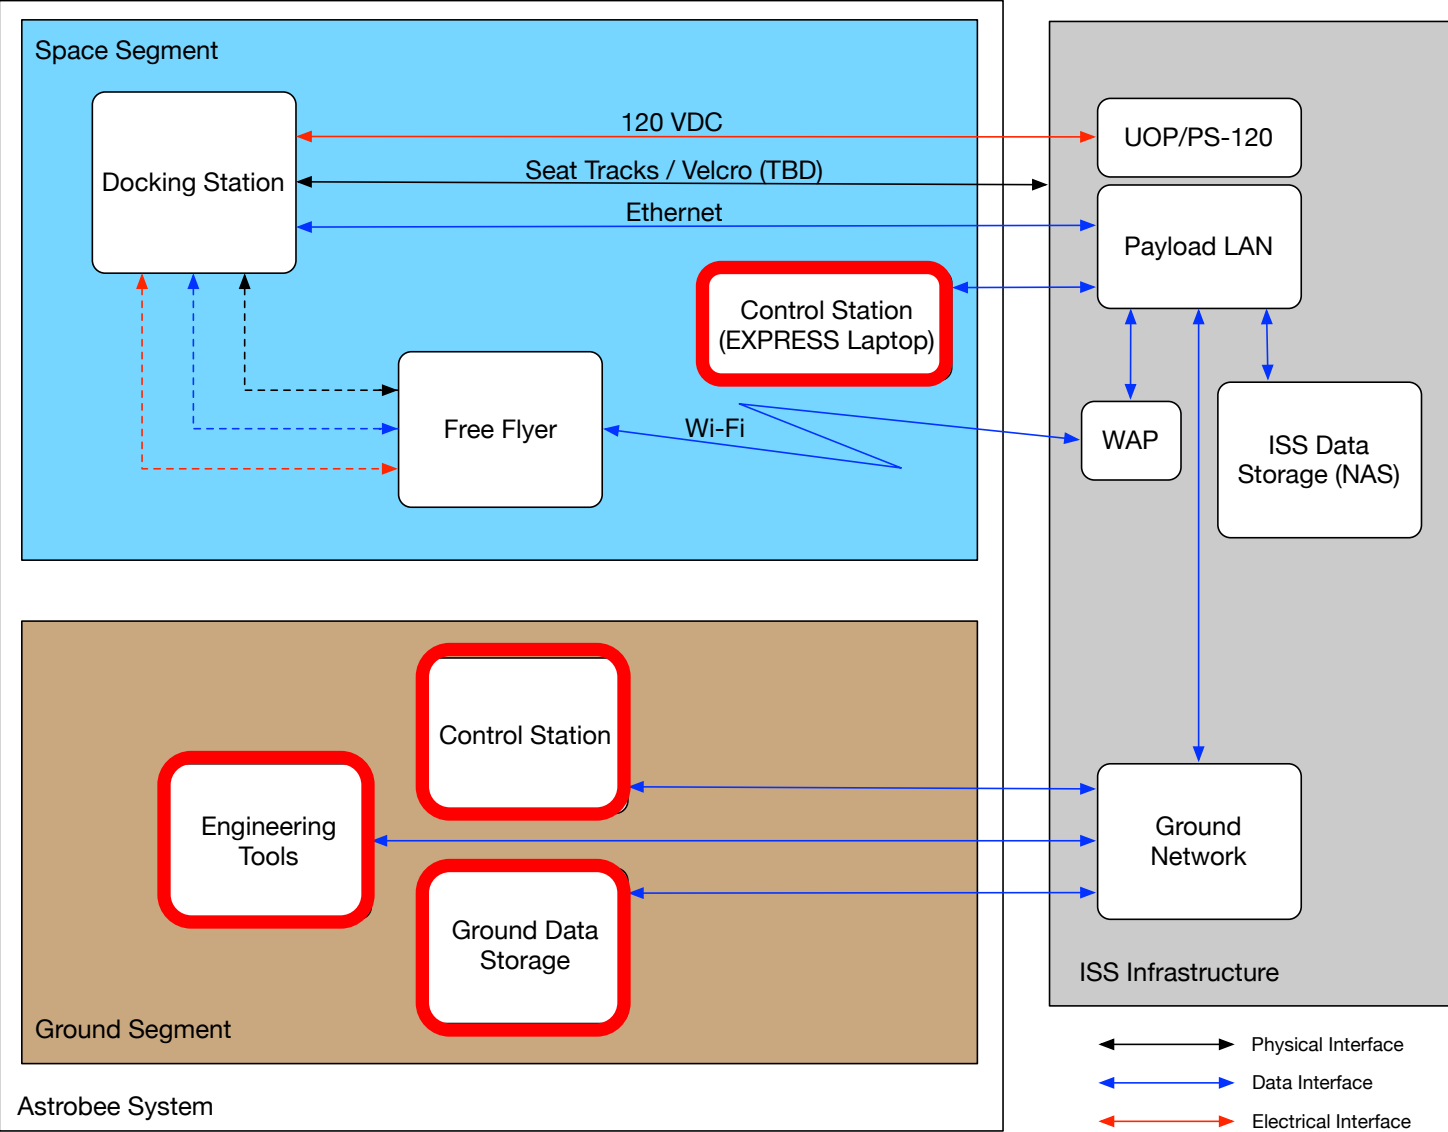



Design Maturity

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.

Component	Maturity / Risk	Forward Design Work
Plan Editor	High	
Plan Controller	High	
Teleoperation	High	
Guest Science	High	
Ground server	Med / Low	Specify server
Data Archive Interface	High	
Engineering Tools	High	



New/Changes from PTR3

The Astrobee team is aiming for CDR-level of maturity for all system hardware, however there are some known design gaps described below.

All system software is less mature, and is not at CDR-level of maturity.

Software builds are expected to continue through on-orbit testing.

Component	New / Changes
Faults	Display name of faulty subsystem, no display for warnings
Guest Science	Split Guest Science into Crew tab and Advanced Tab
Control Station GUI	Added buttons to allow access to needed functionality
Ground Server	Verified TReK connection to Ground Server is possible
Config Files	Repository of config files
SmartDock	Support for Wake/Hibernate via SmartDock



Control Station



Control Station

Tab	Description	Crew	Ground Controllers	Guest Scientists	Astrobee Engineers
Plan Editor	Create and edit Plans		X	X	X
Plan Controller	Run Plans and monitor execution	X	X	X	X
Teleoperation	Send individual commands	X	X	X	X
Guest Science	Run Plans on up to 3 Astrobees	X			
Advanced Guest Science	Run Plans and control APKs on up to 3 Astrobees			X	X
Advanced	Modify and monitor advanced settings			X	X



Plan Editor

File Edit View Modeling Help
Plan Editor Run Plan Teleoperation

GPS 15Jun16 20:45:10

Plan Editor

Plan Name BB
Estimated Duration 00:12:19
Validation Not Validated **Validate**

Plan Step Duration

BB	
0 Station	
0-1 Segment	00:01:33
1 Station	
1-2 Segment	
2 Station	
2-3 Segment	
3 Station	
3-4 Segment	
4 Station	
4-5 Segment	
5 Station	
5-6 Segment	
6 Station	

Plan info

List view of Plan

0 Station

Location Based Coordinate Based Bookmarks Commands

X 7.43 Y -2.25 Z 0.20 m
Roll 0 Pitch 0 Yaw 0 deg

☐ Ignore Orientation
Tolerance 0.1 m
☒ Drag to Translate ☐ Drag to Rotate

Validation Failed
Potential collision in Segment 0-1. Please move Station 0 or Station 1.
OK

3D model of Plan

Element editor

Interactive Plan Viewer

Reset View

Reset View
Center on Bee

00:00:00 Message goes here

Log Help Exit



Teleoperation Tab

File Edit View Help
Run Plan Teleoperation Guest Science

FreeFlyerA Comm ● Control DW@DW-Windows7-32 Batt 87

Health and Status Details

Operating State	Ready
Mobility State	Stopped
Operating Limits	Default_Safeguard
Plan	
Plan Status	Idle

Manual Commanding Perching Arm Docking

Initialization

Wake

Grab Control

No Bookmark Selected

Manual Inputs Reset Inputs

m		deg	
Aft	0.5	Fwd	Roll -0.0
Port	-0.5	Stbd	Pitch -0.0
Ovhd	0.0	Deck	Yaw -45.0

Options

Allow Lateral Motion

Override Obstacles

Override Keepouts

Commands

Move

Stop

Docking Station ● GPS 12Jan17 01:46:27

Configurable Teleop Commands

Gripper Open

Idle Propulsion Idle

Payload A On

Flashlight Brightness

Front High Set

Data Type Action

Immediate Download Send

Live Telemetry Live Images Live Video

LAB1S1 LAB1S2 LAB1S3 LAB1S4 LAB1S5

LAB1D1 LAB1D2 LAB1C3 LAB1D4

Buttons here can be changed via config file

01:44:24 FreeFlyerA: Unknown Command Completed



Teleoperation Tab

Crew Control Station

File Edit View Help

Run Plan Teleoperation Guest Science

FreeFlyerA Comm ● Control DW@DW-Windows7-32 Batt 62

Docking Station ● GPS 14Jan17 00:11:04

Health and Status

Operating State	Ready
Mobility State	Perched
Operating Limits	Default_Safeguard
Plan	
Plan Status	Idle

Manual Commanding

Initialization

Wake

Grab Control

Manual Inputs (Degrees)

Pan deg

Tilt deg

Options

Reacquire Position

Commands

Unperch

Pan and Tilt

Stop

Reacquire position if Astrobee knocked accidentally

Configurable Teleop Commands

Gripper

Idle Propulsion

Payload A

Flashlight Brightness

Front High

Data Type Action

Immediate Download

Live Telemetry Live Images Live Video

LAB1S4

LAB1S5

LAB1S6

LAB1S7

LAB1S8

LAB1S9

LAB1S10

LAB1S11

LAB1S12

LAB1S13

LAB1S14

LAB1S15

LAB1S16

LAB1S17

LAB1S18

LAB1S19

LAB1S20

LAB1S21

LAB1S22

LAB1S23

LAB1S24

LAB1S25

LAB1S26

LAB1S27

LAB1S28

LAB1S29

LAB1S30

LAB1S31

LAB1S32

LAB1S33

LAB1S34

LAB1S35

LAB1S36

LAB1S37

LAB1S38

LAB1S39

LAB1S40

LAB1S41

LAB1S42

LAB1S43

LAB1S44

LAB1S45

LAB1S46

LAB1S47

LAB1S48

LAB1S49

LAB1S50

LAB1S51

LAB1S52

LAB1S53

LAB1S54

LAB1S55

LAB1S56

LAB1S57

LAB1S58

LAB1S59

LAB1S60

LAB1S61

LAB1S62

LAB1S63

LAB1S64

LAB1S65

LAB1S66

LAB1S67

LAB1S68

LAB1S69

LAB1S70

LAB1S71

LAB1S72

LAB1S73

LAB1S74

LAB1S75

LAB1S76

LAB1S77

LAB1S78

LAB1S79

LAB1S80

LAB1S81

LAB1S82

LAB1S83

LAB1S84

LAB1S85

LAB1S86

LAB1S87

LAB1S88

LAB1S89

LAB1S90

LAB1S91

LAB1S92

LAB1S93

LAB1S94

LAB1S95

LAB1S96

LAB1S97

LAB1S98

LAB1S99

LAB1S100

LAB1S101

LAB1S102

LAB1S103

LAB1S104

LAB1S105

LAB1S106

LAB1S107

LAB1S108

LAB1S109

LAB1S110

LAB1S111

LAB1S112

LAB1S113

LAB1S114

LAB1S115

LAB1S116

LAB1S117

LAB1S118

LAB1S119

LAB1S120

LAB1S121

LAB1S122

LAB1S123

LAB1S124

LAB1S125

LAB1S126

LAB1S127

LAB1S128

LAB1S129

LAB1S130

LAB1S131

LAB1S132

LAB1S133

LAB1S134

LAB1S135

LAB1S136

LAB1S137

LAB1S138

LAB1S139

LAB1S140

LAB1S141

LAB1S142

LAB1S143

LAB1S144

LAB1S145

LAB1S146

LAB1S147

LAB1S148

LAB1S149

LAB1S150

LAB1S151

LAB1S152

LAB1S153

LAB1S154

LAB1S155

LAB1S156

LAB1S157

LAB1S158

LAB1S159

LAB1S160

LAB1S161

LAB1S162

LAB1S163

LAB1S164

LAB1S165

LAB1S166

LAB1S167

LAB1S168

LAB1S169

LAB1S170

LAB1S171

LAB1S172

LAB1S173

LAB1S174

LAB1S175

LAB1S176

LAB1S177

LAB1S178

LAB1S179

LAB1S180

LAB1S181

LAB1S182

LAB1S183

LAB1S184

LAB1S185

LAB1S186

LAB1S187

LAB1S188

LAB1S189

LAB1S190

LAB1S191

LAB1S192

LAB1S193

LAB1S194

LAB1S195

LAB1S196

LAB1S197

LAB1S198

LAB1S199

LAB1S200

LAB1S201

LAB1S202

LAB1S203

LAB1S204

LAB1S205

LAB1S206

LAB1S207

LAB1S208

LAB1S209

LAB1S210

LAB1S211

LAB1S212

LAB1S213

LAB1S214

LAB1S215

LAB1S216

LAB1S217

LAB1S218

LAB1S219

LAB1S220

LAB1S221

LAB1S222

LAB1S223

LAB1S224

LAB1S225

LAB1S226

LAB1S227

LAB1S228

LAB1S229

LAB1S230

LAB1S231

LAB1S232

LAB1S233

LAB1S234

LAB1S235

LAB1S236

LAB1S237

LAB1S238

LAB1S239

LAB1S240

LAB1S241

LAB1S242

LAB1S243

LAB1S244

LAB1S245

LAB1S246

LAB1S247

LAB1S248

LAB1S249

LAB1S250

LAB1S251

LAB1S252

LAB1S253

LAB1S254

LAB1S255

LAB1S256

LAB1S257

LAB1S258

LAB1S259

LAB1S260

LAB1S261

LAB1S262

LAB1S263

LAB1S264

LAB1S265

LAB1S266

LAB1S267

LAB1S268

LAB1S269

LAB1S270

LAB1S271

LAB1S272

LAB1S273

LAB1S274

LAB1S275

LAB1S276

LAB1S277

LAB1S278

LAB1S279

LAB1S280

LAB1S281

LAB1S282

LAB1S283

LAB1S284

LAB1S285

LAB1S286

LAB1S287

LAB1S288

LAB1S289

LAB1S290

LAB1S291

LAB1S292

LAB1S293

LAB1S294

LAB1S295

LAB1S296

LAB1S297

LAB1S298

LAB1S299

LAB1S300

LAB1S301

LAB1S302

LAB1S303

LAB1S304

LAB1S305

LAB1S306

LAB1S307

LAB1S308

LAB1S309

LAB1S310

LAB1S311

LAB1S312

LAB1S313

LAB1S314

LAB1S315

LAB1S316

LAB1S317

LAB1S318

LAB1S319

LAB1S320

LAB1S321

LAB1S322

LAB1S323

LAB1S324

LAB1S325

LAB1S326

LAB1S327

LAB1S328

LAB1S329

LAB1S330

LAB1S331

LAB1S332

LAB1S333

LAB1S334

LAB1S335

LAB1S336

LAB1S337

LAB1S338

LAB1S339

LAB1S340

LAB1S341

LAB1S342

LAB1S343

LAB1S344

LAB1S345

LAB1S346

LAB1S347

LAB1S348

LAB1S349

LAB1S350

LAB1S351

LAB1S352

LAB1S353

LAB1S354

LAB1S355

LAB1S356

LAB1S357

LAB1S358

LAB1S359

LAB1S360

LAB1S361

LAB1S362

LAB1S363

LAB1S364

LAB1S365

LAB1S366

LAB1S367

LAB1S368

LAB1S369

LAB1S370

LAB1S371

LAB1S372

LAB1S373

LAB1S374

LAB1S375

LAB1S376

LAB1S377

LAB1S378

LAB1S379

LAB1S380

LAB1S381

LAB1S382

LAB1S383

LAB1S384

LAB1S385

LAB1S386

LAB1S387

LAB1S388

LAB1S389

LAB1S390

LAB1S391

LAB1S392

LAB1S393

LAB1S394

LAB1S395

LAB1S396

LAB1S397

LAB1S398

LAB1S399

LAB1S400

LAB1S401

LAB1S402

LAB1S403

LAB1S404

LAB1S405

LAB1S406

LAB1S407

LAB1S408

LAB1S409

LAB1S410

LAB1S411

LAB1S412

LAB1S413

LAB1S414

LAB1S415

LAB1S416

LAB1S417

LAB1S418

LAB1S419

LAB1S420

LAB1S421

LAB1S422

LAB1S423

LAB1S424

LAB1S425

LAB1S426

LAB1S427

LAB1S428

LAB1S429

LAB1S430

LAB1S431

LAB1S432

LAB1S433

LAB1S434

LAB1S435

LAB1S436

LAB1S437

LAB1S438

LAB1S439

LAB1S440

LAB1S441

LAB1S442

LAB1S443

LAB1S444

LAB1S445

LAB1S446

LAB1S447

LAB1S448

LAB1S449

LAB1S450

LAB1S451

LAB1S452

LAB1S453

LAB1S454

LAB1S455

LAB1S456

LAB1S457

LAB1S458

LAB1S459

LAB1S460

LAB1S461

LAB1S462

LAB1S463

LAB1S464

LAB1S465

LAB1S466

LAB1S467

LAB1S468

LAB1S469

LAB1S470

LAB1S471

LAB1S472

LAB1S473

LAB1S474

LAB1S475

LAB1S476

LAB1S477

LAB1S478

LAB1S479

LAB1S480

LAB1S481

LAB1S482

LAB1S483

LAB1S484

LAB1S485

LAB1S486

LAB1S487

LAB1S488

LAB1S489

LAB1S490

LAB1S491

LAB1S492

LAB1S493

LAB1S494

LAB1S495

LAB1S496

LAB1S497

LAB1S498

LAB1S499

LAB1S500

LAB1S501

LAB1S502

LAB1S503

LAB1S504

LAB1S505

LAB1S506

LAB1S507

LAB1S508

LAB1S509

LAB1S510

LAB1S511

LAB1S512

LAB1S513

LAB1S514

LAB1S515

LAB1S516

LAB1S517

LAB1S518

LAB1S519

LAB1S520

LAB1S521

LAB1S522

LAB1S523

LAB1S524

LAB1S525

LAB1S526

LAB1S527

LAB1S528

LAB1S529

LAB1S530

LAB1S531

LAB1S532

LAB1S533

LAB1S534

LAB1S535

LAB1S536

LAB1S537

LAB1S538

LAB1S539

LAB1S540

LAB1S541

LAB1S542

LAB1S543

LAB1S544

LAB1S545

LAB1S546

LAB1S547

LAB1S548

LAB1S549

LAB1S550

LAB1S551

LAB1S552

LAB1S553

LAB1S554

LAB1S555

LAB1S556

LAB1S557

LAB1S558

LAB1S559

LAB1S560

LAB1S561

LAB1S562

LAB1S563

LAB1S564

LAB1S565

LAB1S566

LAB1S567

LAB1S568

LAB1S569

LAB1S570

LAB1S571

LAB1S572

LAB1S573

LAB1S574

LAB1S575

LAB1S576

LAB1S577

LAB1S578

LAB1S579

LAB1S580

LAB1S581

LAB1S582

LAB1S583

LAB1S584

LAB1S585

LAB1S586

LAB1S587

LAB1S588

LAB1S589

LAB1S590

LAB1S591

LAB1S592

LAB1S593

LAB1S594

LAB1S595

LAB1S596

LAB1S597

LAB1S598

LAB1S599

LAB1S600

LAB1S601

LAB1S602

LAB1S603

LAB1S604

LAB1S605

LAB1S606

LAB1S607

LAB1S608

LAB1S609

LAB1S610

LAB1S611

LAB1S612

LAB1S613

LAB1S614

LAB1S615

LAB1S616

LAB1S617

LAB1S618

LAB1S619

LAB1S620

LAB1S621

LAB1S622

LAB1S623

LAB1S624

LAB1S625

LAB1S626

LAB1S627

LAB1S628

LAB1S629

LAB1S630

LAB1S631

LAB1S632

LAB1S633

LAB1S634

LAB1S635

LAB1S636

LAB1S637

LAB1S638

LAB1S639

LAB1S640

LAB1S641

LAB1S642

LAB1S643

LAB1S644

LAB1S645

LAB1S646

LAB1S647

LAB1S648

LAB1S649

LAB1S650

LAB1S651

LAB1S652

LAB1S653

LAB1S654

LAB1S655

LAB1S656

LAB1S657

LAB1S658

LAB1S659

LAB1S660

LAB1S661

LAB1S662

LAB1S663

LAB1S664

LAB1S665

LAB1S666

LAB1S667

LAB1S668

LAB1S669

LAB1S670

LAB1S671

LAB1S672

LAB1S673

LAB1S674

LAB1S675

LAB1S676

LAB1S677

LAB1S678

LAB1S679

LAB1S680

LAB1S681

LAB1S682

LAB1S683

LAB1S684

LAB1S685

LAB1S686

LAB1S687

LAB1S688

LAB1S689

LAB1S690

LAB1S691

LAB1S692

LAB1S693

LAB1S694

LAB1S695

LAB1S696

LAB1S697

LAB1S698

LAB1S699

LAB1S700

LAB1S701

LAB1S702

LAB1S703

LAB1S704

LAB1S705

LAB1S706

LAB1S707

LAB1S708

LAB1S709

LAB1S710

LAB1S711

LAB1S712

LAB1S713

LAB1S714

LAB1S715

LAB1S716

LAB1S717

LAB1S718

LAB1S719

LAB1S720

LAB1S721

LAB1S722

LAB1S723

LAB1S724

LAB1S725

LAB1S726

LAB1S727

LAB1S728

LAB1S729

LAB1S730

LAB1S731

LAB1S732

LAB1S733

LAB1S734

LAB1S735

LAB1S736

LAB1S737

LAB1S738

LAB1S739

LAB1S740

LAB1S741

LAB1S742

LAB1S743

LAB1S744

LAB1S745

LAB1S746

LAB1S747

LAB1S748

LAB1S749

LAB1S750

LAB1S751

LAB1S752

LAB1S753

LAB1S754

LAB1S755

LAB1S756

LAB1S757

LAB1S758

LAB1S759

LAB1S760

LAB1S761

LAB1S762

LAB1S763

LAB1S764

LAB1S765

LAB1S766

LAB1S767

LAB1S768

LAB1S769

LAB1S770

LAB1S771

LAB1S772

LAB1S773

LAB1S774

LAB1S775

LAB1S776

LAB1S777

LAB1S778

LAB1S779

LAB1S780

LAB1S781

LAB1S782

LAB1S783

LAB1S784

LAB1S785

LAB1S786

LAB1S787

LAB1S788

LAB1S789

LAB1S790

LAB1S791

LAB1S792

LAB1S793

LAB1S794

LAB1S795

LAB1S796

LAB1S797

LAB1S798

LAB1S799

LAB1S800

LAB1S801

LAB1S802

LAB1S803

LAB1S804

LAB1S805

LAB1S806

LAB1S807

LAB1S808

LAB1S809

LAB1S810

LAB1S811

LAB1S812

LAB1S813

LAB1S814

LAB1S815

LAB1S816

LAB1S817

LAB1S818

LAB1S819

LAB1S820

LAB1S821

LAB1S822

LAB1S823

LAB1S824

LAB1S825

LAB1S826

LAB1S827

LAB1S828

LAB1S829

LAB1S830

LAB1S831

LAB1S832

LAB1S833

LAB1S834

LAB1S835

LAB1S836

LAB1S837

LAB1S838

LAB1S839

LAB1S840

LAB1S841

LAB1S842

LAB1S843

LAB1S844

LAB1S845

LAB1S846

LAB1S847

LAB1S848

LAB1S849

LAB1S850

LAB1S851

LAB1S852

LAB1S853

LAB1S854

LAB1S855

LAB1S856

LAB1S857

LAB1S858

LAB1S859

LAB1S860

LAB1S861

LAB1S862

LAB1S863

LAB1S864

LAB1S865

LAB1S866

LAB1S867

LAB1S868

LAB1S869

LAB1S870

LAB1S871

LAB1S872

LAB1S873

LAB1S874

LAB1S875

LAB1S876

LAB1S877

LAB1S878

LAB1S879

LAB1S880

LAB1S881

LAB1S882

LAB1S883

LAB1S884

LAB1S885

LAB1S886

LAB1S887

LAB1S888

LAB1S889

LAB1S890

LAB1S891

LAB1S892

LAB1S893

LAB1S894

LAB1S895

LAB1S896

LAB1S897

LAB1S898

LAB1S899

LAB1S900

LAB1S901

LAB1S902

LAB1S903

LAB1S904

LAB1S905

LAB1S906

LAB1S907

LAB1S908

LAB1S909

LAB1S910

LAB1S911

LAB1S912

LAB1S913

LAB1S914

LAB1S915

LAB1S916

LAB1S917

LAB1S918

LAB1S919

LAB1S920

LAB1S921

LAB1S922

LAB1S923

LAB1S924

LAB1S925

LAB1S926

LAB1S927

LAB1S928

LAB1S929

LAB1S930

LAB1S931

LAB1S932

LAB1S933

LAB1S934

LAB1S935

LAB1S936

LAB1S937

LAB1S938

LAB1S939

LAB1S940

LAB1S941

LAB1S942

LAB1S943

LAB1S944

LAB1S945

LAB1S946

LAB1S947

LAB1S948

LAB1S949

LAB1S950

LAB1S951

LAB1S952

LAB1S953

LAB1S954

LAB1S955

LAB1S956

LAB1S957

LAB1S958

LAB1S959

LAB1S960

LAB1S961

LAB1S962

LAB1S963

LAB1S964

LAB1S965

LAB1S966

LAB1S967

LAB1S968

LAB1S969

LAB1S970

LAB1S971

LAB1S972

LAB1S973

LAB1S974

LAB1S975

LAB1S976

LAB1S977

LAB1S978

LAB1S979

LAB1S980

LAB1S981

LAB1S982

LAB1S983

LAB1S984

LAB1S985

LAB1S986

LAB1S987

LAB1S988

LAB1S989

LAB1S990

LAB1S991

LAB1S992

LAB1S993

LAB1S994

LAB1S995

LAB1S996

LAB1S997

LAB1S998

LAB1S999

LAB1S1000

LAB1S1001

LAB1S1002

LAB1S1003

LAB1S1004

LAB1S1005

LAB1S1006

LAB1S1007

LAB1S1008

LAB1S1009

LAB1S1010

LAB1S1011

LAB1S1012

LAB1S1013

LAB1S1014

LAB1S1015

LAB1S1016

LAB1S1017

LAB1S1018

LAB1S1019

LAB1S1020

LAB1S1021

LAB1S1022

LAB1S1023

LAB1S1024

LAB1S1025

LAB1S1026

LAB1S1027

LAB1S1028

LAB1S1029

LAB1S1030

LAB1S1031

LAB1S1032

LAB1S1033

LAB1S1034

LAB1S1035

LAB1S1036

LAB1S1037

LAB1S1038

LAB1S1039

LAB1S1040

LAB1S1041

LAB1S1042

LAB1S1043

LAB1S1044

LAB1S1045

LAB1S1046

LAB1S1047

LAB1S1048

LAB1S1049

LAB1S1050

LAB1S1051

LAB1S1052

LAB1S1053

LAB1S1054

LAB1S1055

LAB1S1056

LAB1S1057

LAB1S1058

LAB1S1059

LAB1S1060

LAB1S1061

LAB1S1062

LAB1S1063

LAB1S1064

LAB1S1065

LAB1S1066

LAB1S1067

LAB1S1068

LAB1S1069

LAB1S1070

LAB1S1071

LAB1S1072

LAB1S1073

LAB1S1074

LAB1S1075

LAB1S1076</



Teleoperation Tab

Crew Control Station

File Edit View Help

Run Plan Teleoperation Guest Science

FreeFlyerA Comm ● Control DW@DW-Windows7-32 Batt 45

Docking Station ● GPS 12Jan17 01:50:03

Health and Status Details

Operating State	Ready
Mobility State	Stopped
Operating Limits	Default_Safeguard
Plan	
Plan Status	Idle

Manual Commanding Perching Arm Docking

Initialization

Wake

Grab Control

Manual Inputs

Berth 1

Options

Disable Auto Return

Commands

Dock Automatically

Dock Manually

Stop

Configurable Teleop Commands

Gripper Open

Idle Propulsion Idle

Payload A On

Flashlight Brightness

Front High Set

Data Type Action

Immediate Download Send

Live Telemetry Live Images Live Video

LAB1S3 LAB1S4

LAB1S6

LAB

01:49:49 FreeFlyerA: Unperch Completed



Teleoperation Tab

Crew Control Station

File Edit View Help

Run Plan Teleoperation Guest Science

FreeFlyerC Comm ● Control nobody Batt 86

Docking Station ● GPS 12Jan17 01:57:23

Health and Status

Disabled Subsystems	Subsystem A, Subsystem C
Operating State	Ready
Mobility State	Stopped
Operating Limits	Default_Safeguard
Plan	
Plan Status	Idle

Details

Manual Commanding Perching Arm Docking

Initialization Manual Inputs Options Commands

Disable Auto Return

Dock Automatically

Dock Manually

Stop

Configurable Teleop Commands

Gripper Open

Idle Propulsion Idle

Payload A On

Flashlight Brightness

Front High Set

Data Type Action

Immediate Download Send

Health and Status Details

Disabled Subsystems	Subsystem A, Subsystem C
Control	nobody
Operating State	Ready
Raw Mobility State	Stopping
Sub Mobility State	0
Operating Limits	Default_Safeguard
Plan	
Plan Status	Idle
Temperature	-
Arm Mobility	-
Arm Gripper	-

OK

Details available from button on Health and Status view

Live Te

LAB1S1 LAB1S2 LAB1S3 LAB1D1 LAB1D2 LAB1D3

x y z

01:56:50 FreeFlyerA: Run Plan Completed




Guest Science Tab




Crew Control Station

File Edit View Help

Run Plan Teleoperation Guest Science

Docking Station  GPS 17Jan17 18:44:47

Astrobee Selection and Status

Control	Batt	Summary	Plan	Plan Status	Health
<input type="checkbox"/> FreeFlyerA	nobody	85		Idle	
<input checked="" type="checkbox"/> FreeFlyerB	DW@DW-Windows7-32	85		Idle	
<input type="checkbox"/> FreeFlyerC					

Checkboxes select Astrobees to command

Status summaries

Names of loaded Plans

Details

Commanding for FreeFlyerB

Wake Grab Control

Plans

Load

Run Stop

Manual Commanding

Guest Science Command

Send Command

Command Astrobees

Live Telemetry Live Images Science Camera

Monitor Astrobee positions in 3D window

18:41:36 FreeFlyerB: Grab Control



Advanced Guest Science

Plan Editor Run Plan Teleoperation Guest Science Advanced Guest Science Advanced Advanced 2 Modeling Debugging

Station ● GPS 18Jan17 20:00:58

Astrobee Selection and Status

Control	Batt	Summary	Plan	Plan Status	Plan Step	APK	APK Status	Health
<input checked="" type="checkbox"/> FreeFlyerA	DW@DW-Windows7-32	85	Starter1	Idle	2 Station	Geiger Counter	Running	●
<input checked="" type="checkbox"/> FreeFlyerB	DW@DW-Windows7-32	85	TestPlan	Idle	7 Station	Grappling Hook	Running	●
<input type="checkbox"/> FreeFlyerC	100							●

Details

Commanding for FreeFlyerA, FreeFlyerB

Control

Plans

Start and Stop APKs directly

APKs

Grappling Hook Start Stop

Manual Commanding

APK Template

Geiger Counter Run Test

Command

command body for Run Test

Send Command

Preview and change APK command before sending

Live Telemetry Live Images Science Camera Guest Science Telemetry

AstrobeeA

APK	STATUS
Turbo	Idle
Grappling Hook	Idle
Geiger Counter	Running

AstrobeeB

APK	STATUS
Turbo	Idle
Grappling Hook	Running
Geiger Counter	Idle

APK	Topic	Label	Value
Geiger Counter	Astrobee...	Status	"Off"
Geiger Counter	Astrobee...	Summary	"Nominal"
Geiger Counter	Astrobee...	Data	25

APK	Topic	Label	Value
Grappling Hook	Astrobee...	Status	"Off"
Grappling Hook	Astrobee...	Summary	"Nominal"
Grappling Hook	Astrobee...	Data	25

View detailed telemetry from APKs



Advanced Tab

FreeFlyerA

Comm Control nobody

Batt 11

Detailed Health and Status

Disabled Subsystems	Subsystem A, Subsystem C
Control	nobody
Operating State	Ready
Raw Mobility State	Stopping
Sub Mobility State	0
Operating Limits	Default_Safeguard
Plan	
Plan Status	Idle
Temperature	-
Arm Mobility	-
Arm Gripper	-

Triggered and Not Triggered Faults

Fault ID	Description	Subsystem	Node
120	SciCam is inoperable	Subsystem A	Node 2
127	Fuse is broken	Subsystem C	Node 3
100	Processor overheated	Subsystem A	Node 1
201	Arm Overcurrent	Subsystem B	Node 3

FreeFlyerA Operating Limits

Select Operating Limits Configuration ...

Configure Data

Name	Value
Profile Name	Default
Flight Mode	Default
Target Linear Velocity	1.0
Target Linear Accel	1.0
Target Angular Velocity	1.0 rad/s
Target Angular Accel	1.0 rad/s/s
Collision Distance	1.0
Check Obstacles	true
Check Keepouts	true

View and change Operating Limits

FreeFlyerA Power State

Battery Total 1

Voltage 2

Current 2

Battery	Present	Voltage	Current
Batt 1	No	-	-
Batt 2	No	-	-
Batt 3	Yes	32	16
Batt 4	No	-	-
Batt 5	Yes	91	30
Batt 6	Yes	73	10
Batt 7	No	-	-

Detailed battery status

FreeFlyerA Component States

Component	Present	Powered	Temp (C)	Current (A)
HLP	Yes	No	33	-1.458
MLP	Yes	Yes	112	2.107
LLP	Yes	No	-	-
Fan1	Yes	No	-	-
Fan2	No	-	-	-
Cam1	No	-	-	-
Cam2	Yes	-	-	-
Cam3	Yes	-	-	-

Detailed component status

FreeFlyerA Data to GDS 2

Telemetry

Current Freq (Hz)	Change to (Hz)
position 5	5 Set
ekfState 7	5 Set
commStatus 8	5 Set
diskState 17	5 Set

Configure telemetry sent to Control Station

Camera Streaming Resolution FPS Bandwidth

science	No	640_480	640_480	0.0	0.0	0.0	0.0	Set
navigation	No	640_480	640_480	0.0	0.0	0.0	0.0	Set
hazard	No	640_480	640_480	0.0	0.0	0.0	0.0	Set

Configure camera streaming

FreeFlyerA Data to Disk

Download Data Stop Data Download Clear Data

Disk	Data Size (GB)	Disk Size (GB)
Disk A	0.000002	0.000002
Disk B	0.000003	0.000003
Disk C	0.000003	0.000003
Disk D	0.000003	0.000003
Disk E	0.000005	0.000005
Disk F	0.000006	0.000006
Disk G	0.000005	0.000005

Disk usage

FreeFlyerA Data to RosTopic

Topic	Downlink	Freq (Hz)
RosTopic0	Immediate	5.0
RosTopic1	Immediate	5.0
RosTopic2	Immediate	5.0
RosTopic3	Delayed	10.0
RosTopic4	Delayed	10.0
RosTopic5	Delayed	10.0
RosTopic6	Delayed	10.0

View and configure data saved to disk



Configuration Files


- Config files facilitate changes
- When the Control Station is run in a new location:
 - ControlStationConfig folder is created
 - Default versions of the config files are copied in
- *A config file repo exists on the ground for version control (branches for separate projects, etc)*
- *Ground users pull from repo to update configs*
- *Astrobee Engineering scps config files to ISS*



Ground Data




Data Flow During Operations

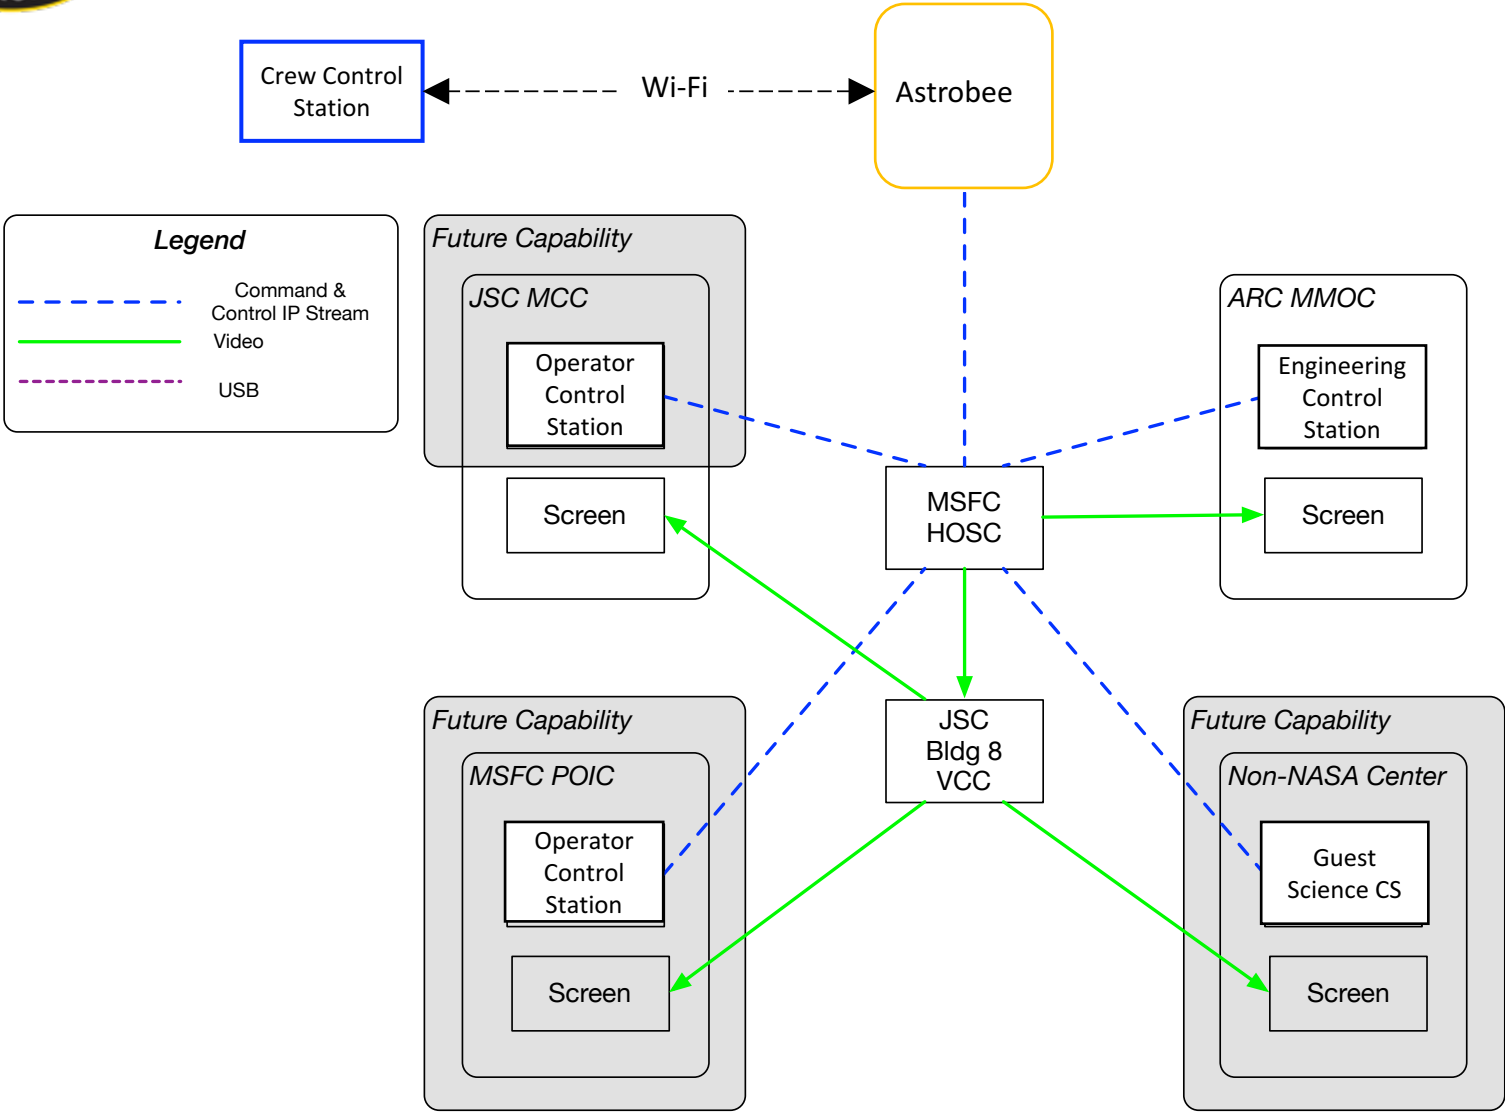



Data Flows After Operations

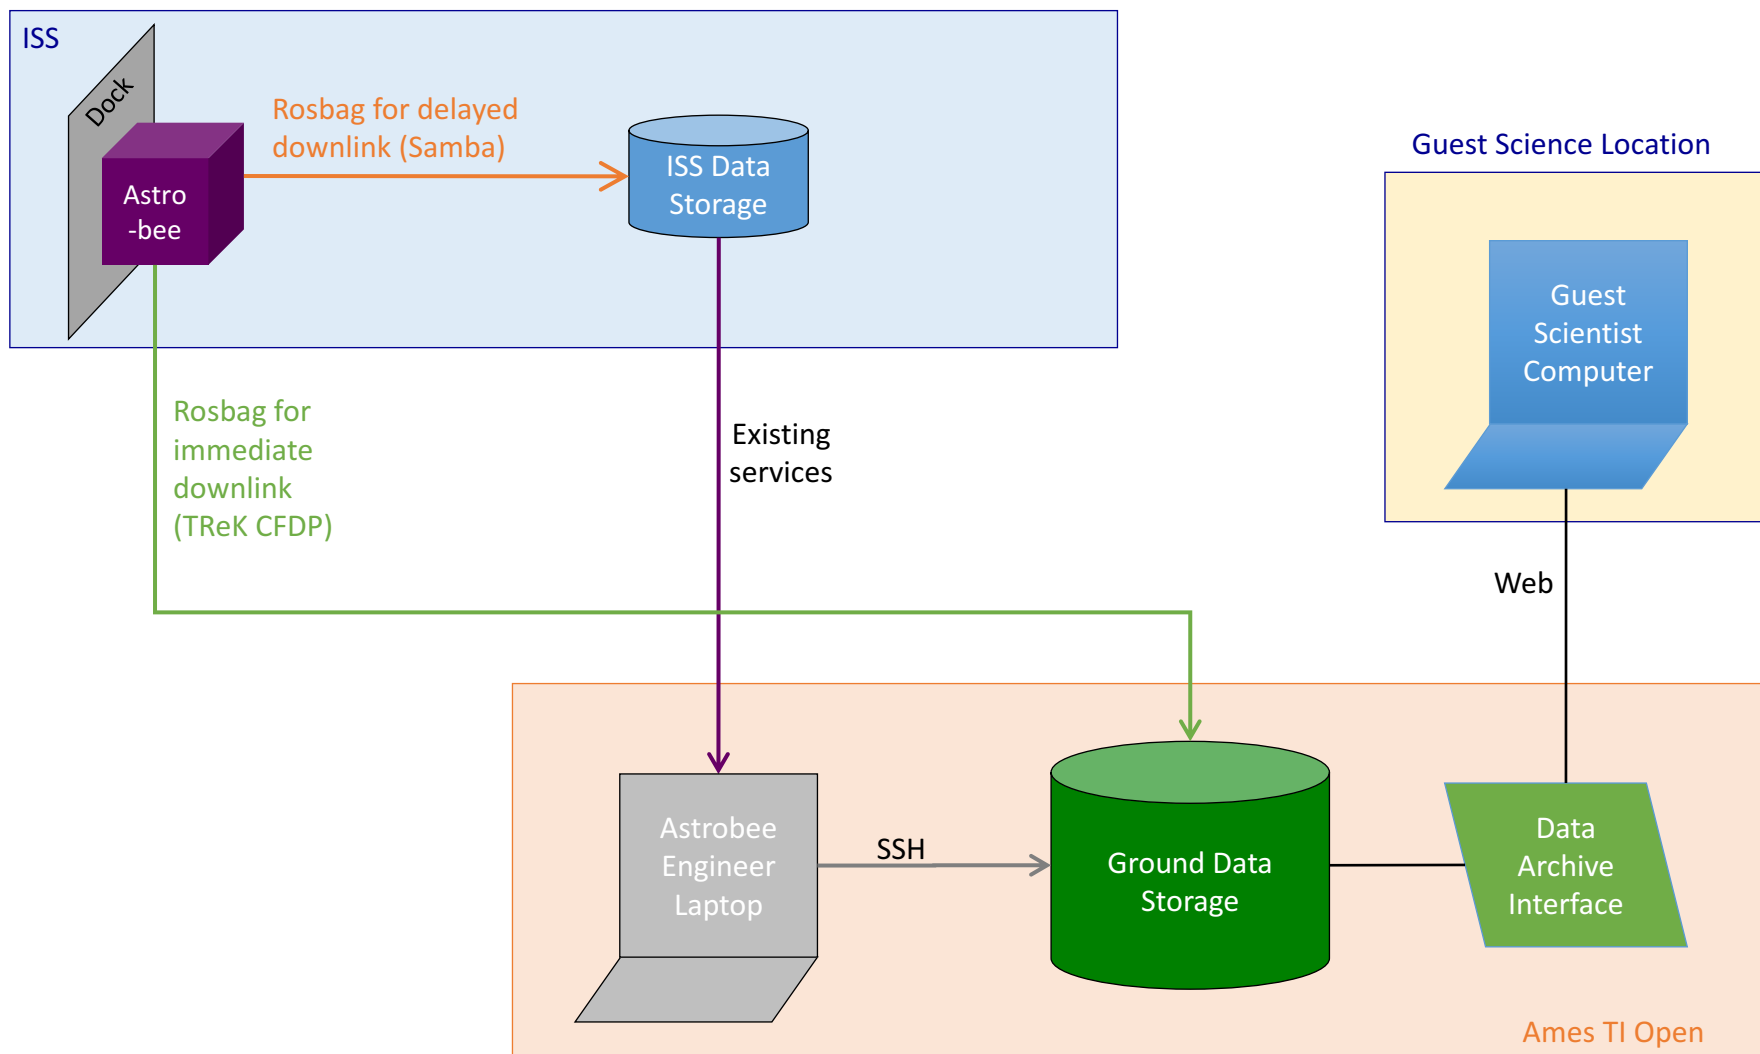



Data Flows After Operations

- When Astrobee is docked after a sortie:
 - Files designated for immediate downlink are transferred from Astrobee *to the Ground Server* via TReK CFDP
 - Files designated for delayed downlink are transferred to ISS data storage and downlinked via existing services at a later time



Ground Data Storage

- Ground Server
 - On TI-Open to provide access to approved external users via LaunchPad
 - Running Red Hat 6 and Apache
- Data Archive Interface
 - Web-based file listing granting read-only access to data on server.
 - Access control allows Guest Scientists to protect proprietary data

Systems Engineering



Delta Periodic Technical Review 3
February 1, 2017



Outline

- Design maturity
- Key performance parameters (KPPs) and technical performance measures (TPMs)



DESIGN MATURITY



Hardware Design Maturity Overview

Subsystem	Maturity (PTR3)	Maturity (now)	Risk	Forward work
Structure	70%	90%	2	Battery retention, camera recessing and bezels, iterate minor P4D issues. [Risk: glass safety / recessing]
Human-robot interaction	40%	100%	1	
Propulsion mechanical	60%	90%	2	Improve strength, finalize soft goods components and impeller balancing. [Risk: collision safety / bumpers; lack of integrated testing during P4D; no noise update until cert]
Propulsion avionics	80%	100%	2	[Risk: collision safety / thrust limiting]
Avionics	80%	90%	1	Over current safety, robust firmware updates, iterate based on P4D issues (e.g. wire routing)
Comm	90%	100%	1	
GN&C	90%	100%	0	
Perching Arm	70%	90%	1	Add retention levers
Thermal	70%	100%	1	
Dock mechanical	80%	90%	1	AR target panel improvements; finalize surface finish
Dock avionics	70%	100%	1	



Software Maturity Overview

Processor	Software maturity (PTR3)	Software maturity (now)	Forward work
HLP/MLP/LLP	40%	60%	Many areas
EPS	80%	90%	Remote wake, crew control details
Propulsion module controller	60%	100%	
Perching arm controller	70%	100%	
SpeedCam [PX4FLOW] *	40%	80%	Fault behavior
Signal light controller *	0%	10%	Detailed design and implementation
Dock controller	70%	90%	Thermal, interface with dock processor
Dock processor *	0%	10%	Detailed design and implementation
Crew control station	70%	90%	Minor bugs, command coverage
Misc. GDS / Enabling products	30%	60%	Identify full suite of support tools needed as conops maturity improves

* Marked rows indicate new items since PTR3 – either new processors, or significant scope increase



KPPS AND TPMS



Key Performance Parameters

Parameter	SPHERES	Threshold Value (Minimum success)	Project Goal (Full success)	Corresponding Technical Performance Measure
Max velocity	4 cm/sec	10 cm/sec	50 cm/sec	N/A – Design will achieve threshold ; challenge is ensuring reliability at high speeds.
Max acceleration	10 cm/sec ²	5 cm/sec ²	10 cm/sec ²	N/A – Design will achieve threshold . Propulsion thrust is on target; acceleration performance now depends on mass.
Localize & position	+/- 3 cm	+/- 20 cm	+/- 2 cm	TPMs 4, 6
Measure angle & point	+/- 2 deg	+/- 20 deg	+/- 8 deg	TPMs 5, 7
Flight time	0.5 hr	2 hr	5 hr	TPM 1
Dock & resupply	Crew tended	Crew tended	Autonomous	N/A – Design will achieve goal
# peripheral ports	1	2	3	N/A – Design will achieve threshold
Sorties supported with peripheral ports	1	1	3	N/A – Design will achieve goal
Consumables used per test session	6	0	0	N/A – Design will achieve goal
ISS operational space	2m x 2m x 2m	JEM, US Lab, and Node 2	All USOS	N/A – Design will achieve goal (modulo safety keepout zones that might include Cupola, Airlock)

[From IRG-FF001-Astrobee-Project-Management-Plan]




Technical Performance Measures

#	Topic	Measure	KPP?	Threshold	Goal
TPM 1	Flight Time (h)		x	2	5
TPM 2	Mass (kg)			8	-
TPM 3	Noise @ Max Thrust (SPL dBA)			65	-
TPM 4	Pose Estimation Error	Translation (cm)	x	20	2
TPM 5		Rotation (deg)	x	20	8
TPM 6	Pose Control Error	Translation (cm)	x	20	2
TPM 7		Rotation (deg)	x	20	8
TPM 8	Navigation MTBF (h)			10	-
TPM 9	Max Computing Processor Load			100%	-
TPM 10	Max Computing Memory Consumption			100%	-

[From IRG-FF002-02-Astrobee-Technical-Performance-Measures]



TPM Schedule and Maturity Targets

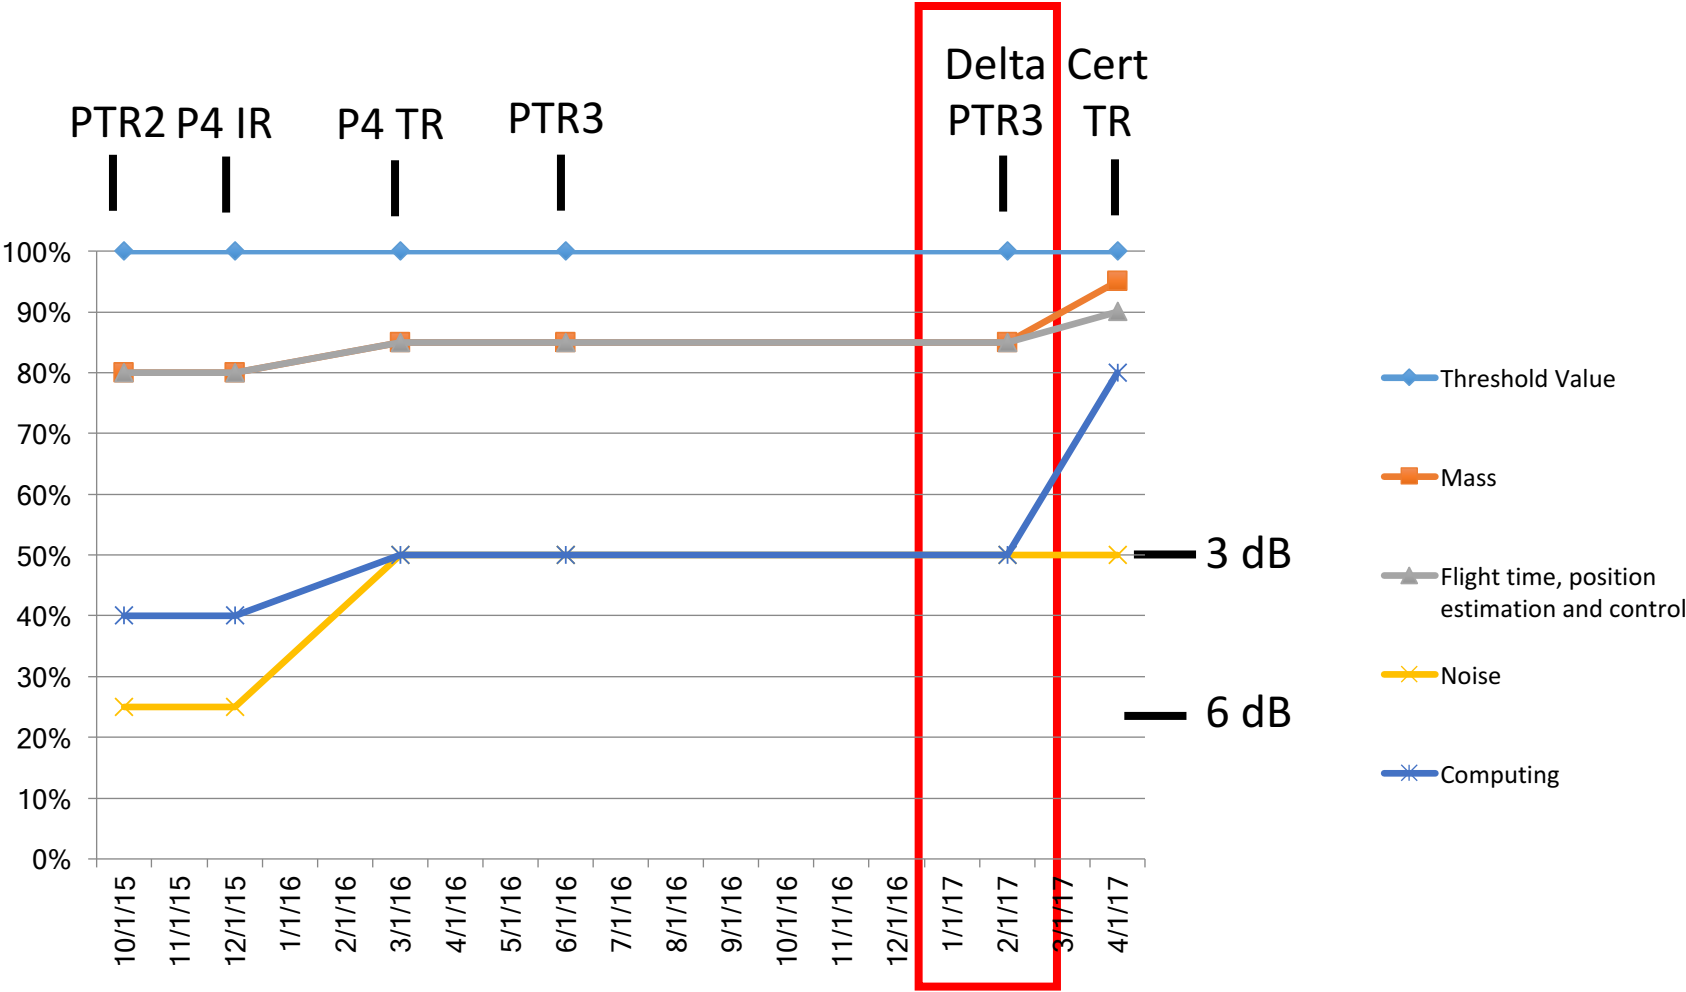



Software-Driven TPMs

- Performance for some TPMs largely driven by software
 - TPMs 4-10 (position estimation and control accuracy, navigation MTBF, CPU and memory)
- Flight software final delivery will likely occur after hardware certification is complete
- As we update the project schedule, we may stretch the maturity timeline for TPMs 4-10 to reference it to software final delivery



TPM Updates PTR3 to Delta PTR3

#	Topic	Update Approach	TPM Accuracy
TPM 1	Flight Time (h)	No update (no major changes to avionics / batteries)	High
TPM 2	Mass (kg)	Improved design detail, weigh some P4D parts	Medium
TPM 3	Noise (dBA)	No update (no new integrated prop module prototype)	Low
TPM 4	Est. Error (cm)	No update (next update part of upcoming P4D testing)	Low
TPM 5	Est. Error (deg)	“	Low
TPM 6	Control Error (cm)	“	Low
TPM 7	Control Error (deg)	“	Low
TPM 8	Nav MTBF (h)	“	Low
TPM 9	CPU (%)	“	Low
TPM 10	Memory (%)	“	Low



TPM Status

#	TPM	Thresh	Desired Margin	Threshold with margin	Current best estimate	PTR2 Status	PTR3 Status
TPM 1	Flight time (h)	≥ 2	15%	≥ 2.3	3.1	Good	Good
TPM 2	Mass (kg)	≤ 8	15%	≤ 6.8	8.7	Good	Off target
TPM 3	Noise (dBA)	≤ 65	3 dB	≤ 62	62.25	Insufficient margin	Insufficient margin
TPM 4	Estimation Error (cm)	≤ 20	15%	≤ 17	8.6	Good	Good
TPM 5	Estimation Error (deg)	≤ 20	15%	≤ 17	3.7	Good	Good
TPM 6	Control Error (cm)	≤ 20	15%	≤ 17	9.3	Good	Good
TPM 7	Control Error (deg)	≤ 20	15%	≤ 17	8.5	Good	Good
TPM 8	Navigation MTBF (h)	≥ 10	15%	≥ 11.5	> 1000	Good	Good
TPM 9	CPU (%)	$\leq 100\%$	50%	$\leq 50\%$	49%	Good	Good
TPM 10	Memory (%)	$\leq 100\%$	50%	$\leq 50\%$	47%	Good	Good



CPU TPM

- Haven't formally re-evaluated this TPM, but may no longer have sufficient margin
- Visual odometry improvements increased CPU consumption in the estimator loop
- Flight software team does not consider this a major concern
 - Control loop is reliable, in practice
 - Optimizations are available if needed to increase efficiency, but many other reliability improvements take priority for now



Noise TPM

- At PTR3, we reported the TPM estimate was 64.5 dBA, too close to the threshold requirement of 65 dBA; the margin should have been 3 dB
- Our plan was to start on further acoustic testing and possibly design rework to regain noise margin
- Further testing showed that the noise measurements were very sensitive to details of experimental setup
 - We switched modes on our sound meter per advice from JSC acoustics experts, and saw reduction from 64.5 dBA to 62.25 dBA (almost on target)
 - There's also still debate about how to position the microphone so as to experience the "worst-case noise" but not have the sound measurement thrown off because the microphone is directly in the air flow path
- Completed minor design rework to reduce noise:
 - We evaluated several COTS servo models for the nozzles, trying to find one that was both quieter and rugged enough to survive extended stall conditions if a nozzle was jammed. We ended up with a model that is very rugged, but not much quieter.
 - We added isolators between the nozzle servos and the plenum body, to avoid the plenum acting as a sounding board to amplify the servo noise.
 - We haven't had a chance to evaluate the resulting improvements yet.
- Proposed forward approach:
 - Acoustics appear to be on target for now, but some risk that prop module structural changes will increase the noise level
 - The new structure may act as a sounding board, or simply absorb less noise than the old foam lid
 - Next full acoustic test will be on cert unit propulsion modules
 - If rework is needed, there will likely be a significant schedule impact



Mass TPM – Post-PTR3 Review

- At PTR3, we reported the mass TPM had negative margin (7.0 kg > 6.0 kg)
- We developed the following plan:

Action	Status	Notes
Accept the mass slip and relax mass threshold requirement to 8 kg, restoring healthy margin	Done	
(Optional) Execute known lightweighting opportunities, possibly reducing mass below 7 kg estimate	Mostly not executed	The mechanical team spent almost 100% time between PTR3 and today making the design close functionally, particularly finishing significant prop module changes. Most of the lightweighting options were not executed due to lack of time.
(Optional) Increase propulsion module rated max thrust to restore acceleration at or near 10 cm/s ² (without changing hardware design)	Not executed	There are three main constraints on max thrust: (1) the physical capability of the power system and motor, (2) limiting kinetic energy in a collision, and (3) noise limits. Recent testing shows there is plenty of headroom for (1), but (2) and (3) still require further testing before we could promise increased thrust. We are getting closer to being able to run the relevant tests, and will continue to assess whether this opportunity exists.



Mass TPM – Recent Update

- At PTR3, we reported that there was a risk of further mass growth, estimated < 0.5 kg, due to low design maturity of some components, particularly the propulsion modules
- Since then, we actually saw mass grow from 7.0 kg to 8.7 kg, significantly exceeding the new mass threshold set at PTR3
- Where the growth came from:
 - The largest hardware design change was replacing the fragile foam plenum lid with a more rugged structure
 - Our tight schedule during that redesign forced straightforward design choices such as solid panels that have sub-optimal strength-to-weight, but are easier to work with
 - Constraints of supporting crew servicing and minimizing redesign of other parts of the prop module led us to a design that's probably more complex than it needs to be, further driving up the mass
 - (Frankly, everyone was surprised how heavy this design worked out to be)



Mass TPM – Forward Plan

- Our baseline plan is to accept the new mass estimate
- Design maturity is much higher now, so we don't expect this to happen again
- Relax mass threshold requirement to 10.5 kg (8.7 kg + ~15% margin)
 - Increased mass will reduce max acceleration to 5.7 cm/s², assuming we don't increase max thrust
 - Increased mass may also require reducing max velocity below 50 cm/s to mitigate collision hazard, pending further testing of SpeedCam and bumpers
- We have other mitigation options:
 - Old lightweighting opportunities still exist, and the redesigned prop module has more low-hanging fruit
 - May still be able to increase rated max thrust to restore acceleration
 - But realistically, we don't have time to execute these options without schedule relief



Agenda

Time	Duration	Presenter	Topic
8:30	0:30	Terry, Chris	Welcome/Intro
9:00	1:30	Trey, Team Leads	Design
10:30	0:15		<i>Break</i>
10:45	1:15	Team Leads	Design
12:00	0:45		<i>Lunch</i>
12:45	0:30		<i>Demo</i>
13:15	1:15	Team Leads	Design
14:30	0:15		<i>Break</i>
14:45	0:30	Trey	Systems Engineering
15:15	0:30	Jonathan	Integration & Test
15:45	0:30	Ernie	Safety
16:15	0:15	Chris	Project Management
16:30	0:15	Maria	Operations
16:45	0:15	Chris	Conclusion

Integration & Test



Overview and Status



Integration and Test Status

- Prototype 4D
 - Created for Additional Risk Reduction
 - All flight-like core, repurposed propulsion module, ABS top-forward module
 - Integration Complete
 - Testing in progress
- Certification Unit
 - Cert Unit Integration Procedures beginning review
 - Continuing coordination with Code Q (Quality Assurance)



Integration and Test Facilities

Facility	Prototype 4D	Certification	Flight
Granite Lab	✓	✓	✓
MGTF	✗	✓	✗
EMI/EMC facility	✓ Ames	✓ JSC	✗
Engineering Evaluation Lab	✓	✓	✓
Off-gassing White Sands	✗	✗	✗
Anechoic	✓ Ames	✓ JSC	✗
JSL at JSC	✗	✓	✗



Prototype 4D Risk reduction

Risk	Status
Fit	Integration Complete, Fit issues being addressed in mechanical design
New Material manufacturing and tolerances	Integration Complete, New materials performed adequately
Gripper Performance	Complete, test report in progress.
Sensor Placement	Testing planned for week of 01/23
Crew Serviceability	Testing planned for week of 01/23
Wi-fi Interference	Testing planned for week of 01/23
Avionics Functionality	Testing planned for week of 01/23

Risk	Status
EMI	Testing planned for week of 01/30
Acoustic	Testing planned for week of 01/30
Margin for Docking Performance	Testing planned for week of 01/30
Retractable Magnets	Testing planned for week of 01/30
Software Update Functionality	Testing planned for week of 01/30
Human Factors	Testing planned for week of 02/06
Glass Shattering	Testing planned for week of 02/06
Thermal Operating Limits	Testing planned for week of 02/13



Granite Lab Facility Development

Element	Status
Visual Environment	✓ Partial Module
Lighting	✓ Incorrect geometry, correct illumination
Ground Truth Data	✓ Visualeyaz
Wireless Network	✗ JSL WAP
Dock Power	✗ 120V power supply
Positioning	✗ Goniometer In progress



- Impacts

- Testing limited in orientations
- Power Supply nearly complete and not used until Cert
- Small WAP in use



MGTF Facility Development


Element	Status
Visual Environment	✓ Full Module
Lighting	✗ Correct geometry, correct illumination
Ground Truth Data	✗ Visualeyex
Wireless Network	✗ JSL WAP
Dock Power	✓ NA
Positioning	✗ Gimbal and Gantry

- Impacts

- Temporary illumination similar to Granite Lab
- Small WAP in use
- Positioning limited to 5-DOF
- Remaining visualeyex LEDs on order



Cert Schedule

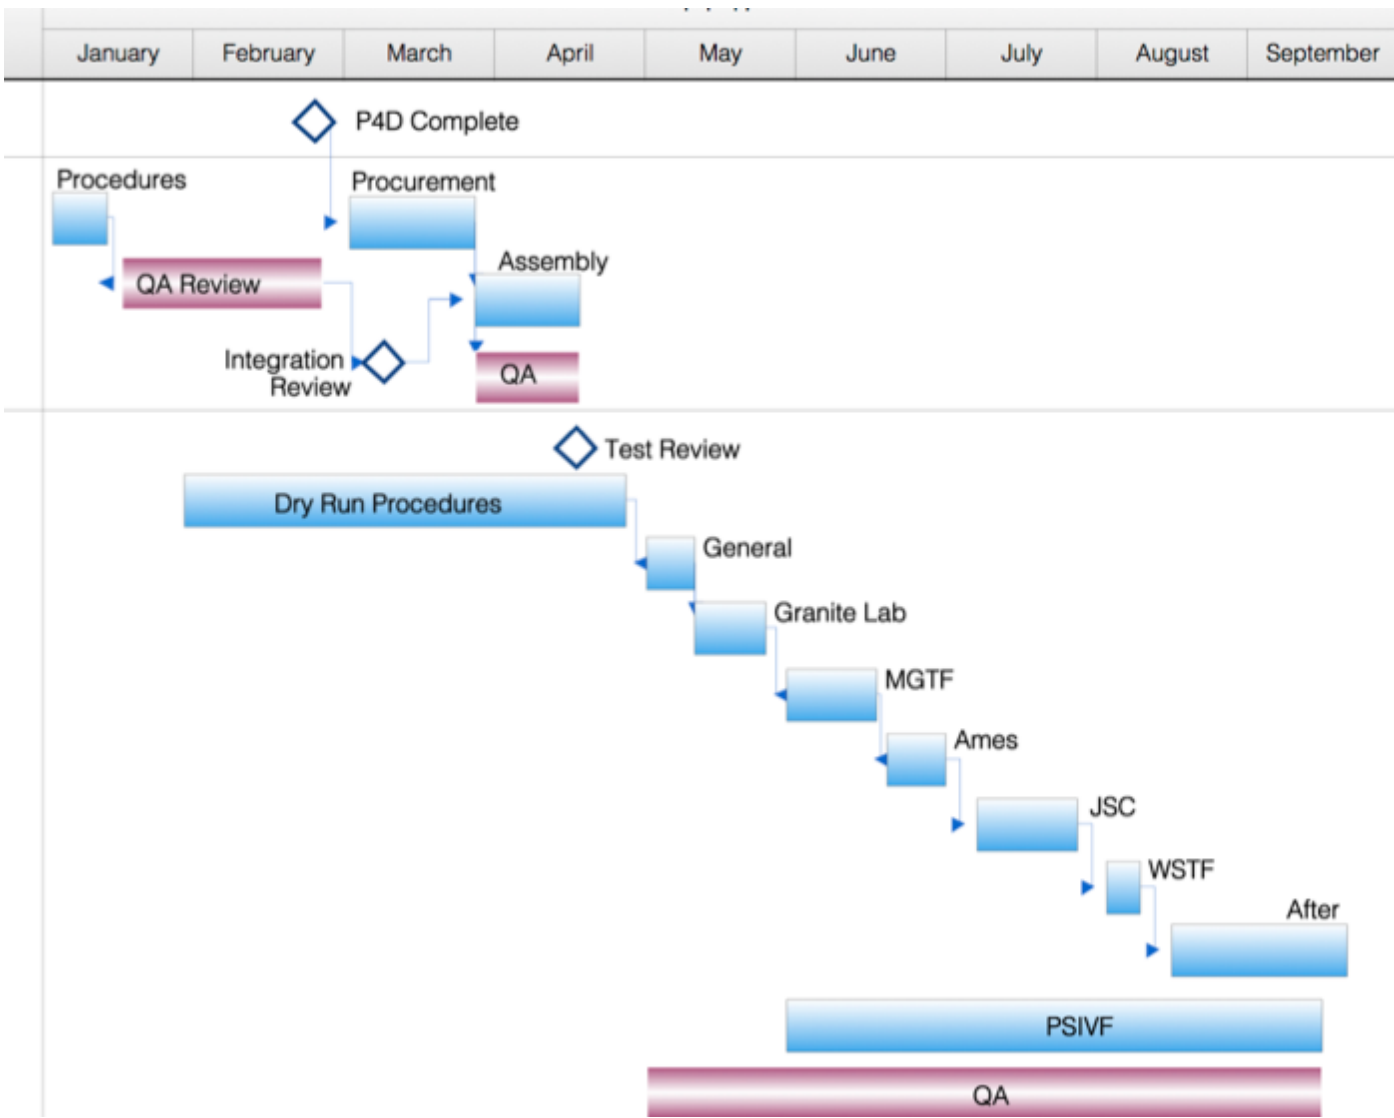



Agenda

Time	Duration	Presenter	Topic
8:30	0:30	Terry, Chris	Welcome/Intro
9:00	1:30	Trey, Team Leads	Design
10:30	0:15		<i>Break</i>
10:45	1:15	Team Leads	Design
12:00	0:45		<i>Lunch</i>
12:45	0:30		<i>Demo</i>
13:15	1:15	Team Leads	Design
14:30	0:15		<i>Break</i>
14:45	0:30	Trey	Systems Engineering
15:15	0:30	Jonathan	Integration & Test
15:45	0:30	Ernie	Safety
16:15	0:15	Chris	Project Management
16:30	0:15	Maria	Operations
16:45	0:15	Chris	Conclusion

Astrobee Delta PTR3



Safety



Safety Status

- PSRP Delta Phase 2 held January 11 & 12, 2017; covered the following:

Topic	HR#	Disposition	Comments
Safety Data Package	28626	Approved with Mods	Minor additional details requested, update to Delta PTR-3 maturity
Standard Hazards: Material Flammability Materials Off-gassing Mechanical/Sharp Edges Touch Temperature Shatterable Materials (lenses) Electromagnetic Radiation Lasers Electrical Power Electrical Mate/Demate Rotating Equipment Translation Paths Interference Vented Containers Failure	9075	Approved with Mods	Mostly clarifications, move vibration to Glass HR, remove External Charger (covered by GeoCam Project)



Safety Status (Cont)

Topic	HR#	Disposition	Comments
Collision	28628	Approved with Mods	Hazard Control plus Equivalent Safety Non-Compliance Report
Li-Ion Battery	28635	Approved with Mods	Update EP-03 form and attach to hazard
Mate/Demate & Electrical Shock	30631	Approved with Mods	Split out UOP Mate/Demate into a separate Cause, remove External Charger
Battery Charger	30720	Approved with Mods	Remove External Charger
Connectivity To ISS UOP Power	32417	Approved with Mods	Expand beyond the power cable to include implications for dock internal electronics
Astrobee Glass Lenses	34164	Approved with Mods	Move vibration testing to this hazard



History

- A PSRP Delta Phase 2 review was requested at the first Phase 2 review June 7 & 8, 2016 primarily due to:
 - Clarification associated with Collision analysis and need for a Equivalent Safety NCR for crew impacting the free flyer
 - Electrical Mate/Demate hazards needed to be collected into a single hazard and expanded
 - Clarifications for hazards including details of the internal free flyer charger, and for connecting to ISS UOP power
- Many splinter meetings and technical exchanges leading up to the Delta Phase 2 review



Delta Phase 2 Primary Results

- All hazards were approved with mods
 - Mostly clarifications, some additional coverage, format updates
- Most discussion centered around:
 - Collision hazard (more later)
 - Reviewed our analysis and testing plans
 - Equivalent Safety NCR – the PSRP Chairman intends to recommend approval to the ISS Program
 - Electrical hazards
 - Li-Ion battery hazard accepted with most of the testing/analysis already completed (from Geocam project)
 - Some reformatting requested for Mate/Demate and Electrical Shock. Expanding coverage in some areas
 - Decided to withdraw the External Charger hazard because it is already covered by the Geocam project
 - Firmware use related to safety critical hardware
 - No specific impacts to hazards identified so far



Other Results

- Electrical:
 - Agreement on smart battery self protections
 - Agreement on use of $<3A$ and very limited short circuit duration rather than an upstream power inhibit for battery insertion/removal from free flyer
 - Agreement on depth of battery enclosure on free flyer for molten metal protection (2.25")
 - More details on wiring diagrams requested
 - Free flyer battery "hot swaps" will require an Ops Control to disable propulsion and Payload



Other Results (cont)

- Flight Software - still non-Safety Critical
 - Any free flyer software updates by future Payload users must be monitored by SPHERES/Astrobee Program Office
 - Any changes to free flyer software would have to be reviewed/approved by PSRP
- Discussion of addressing Maintenance hazards for Phase 3
- Discussion of “Verify Once” versus “Verify Each Flight” for verification closures




Collisions: Worst-Case Runaway

- **This is the challenging case from a safety perspective**
- Worst case is accelerating all the way down the longest corridor on ISS at max thrust
 - ~60-ft Columbus module to JEM windows
 - Note that PSRP Chairman might be willing to consider this full length unrealistic if we need relief
- Max velocity ~2.1 m/s, ~5 mph (jogging speed)
- Collision types/severity
 - Crew (primarily crew impacting free flyer) – Critical (NCR)
 - Windows - Marginal because of scratch panes
 - Structure - Marginal by staying within 125 lbf
 - Projecting hardware (e.g. laptop on Bogen arm) - Marginal
- Accept risk that Astrobee may be inoperable after collision




Worst-Case Runaway

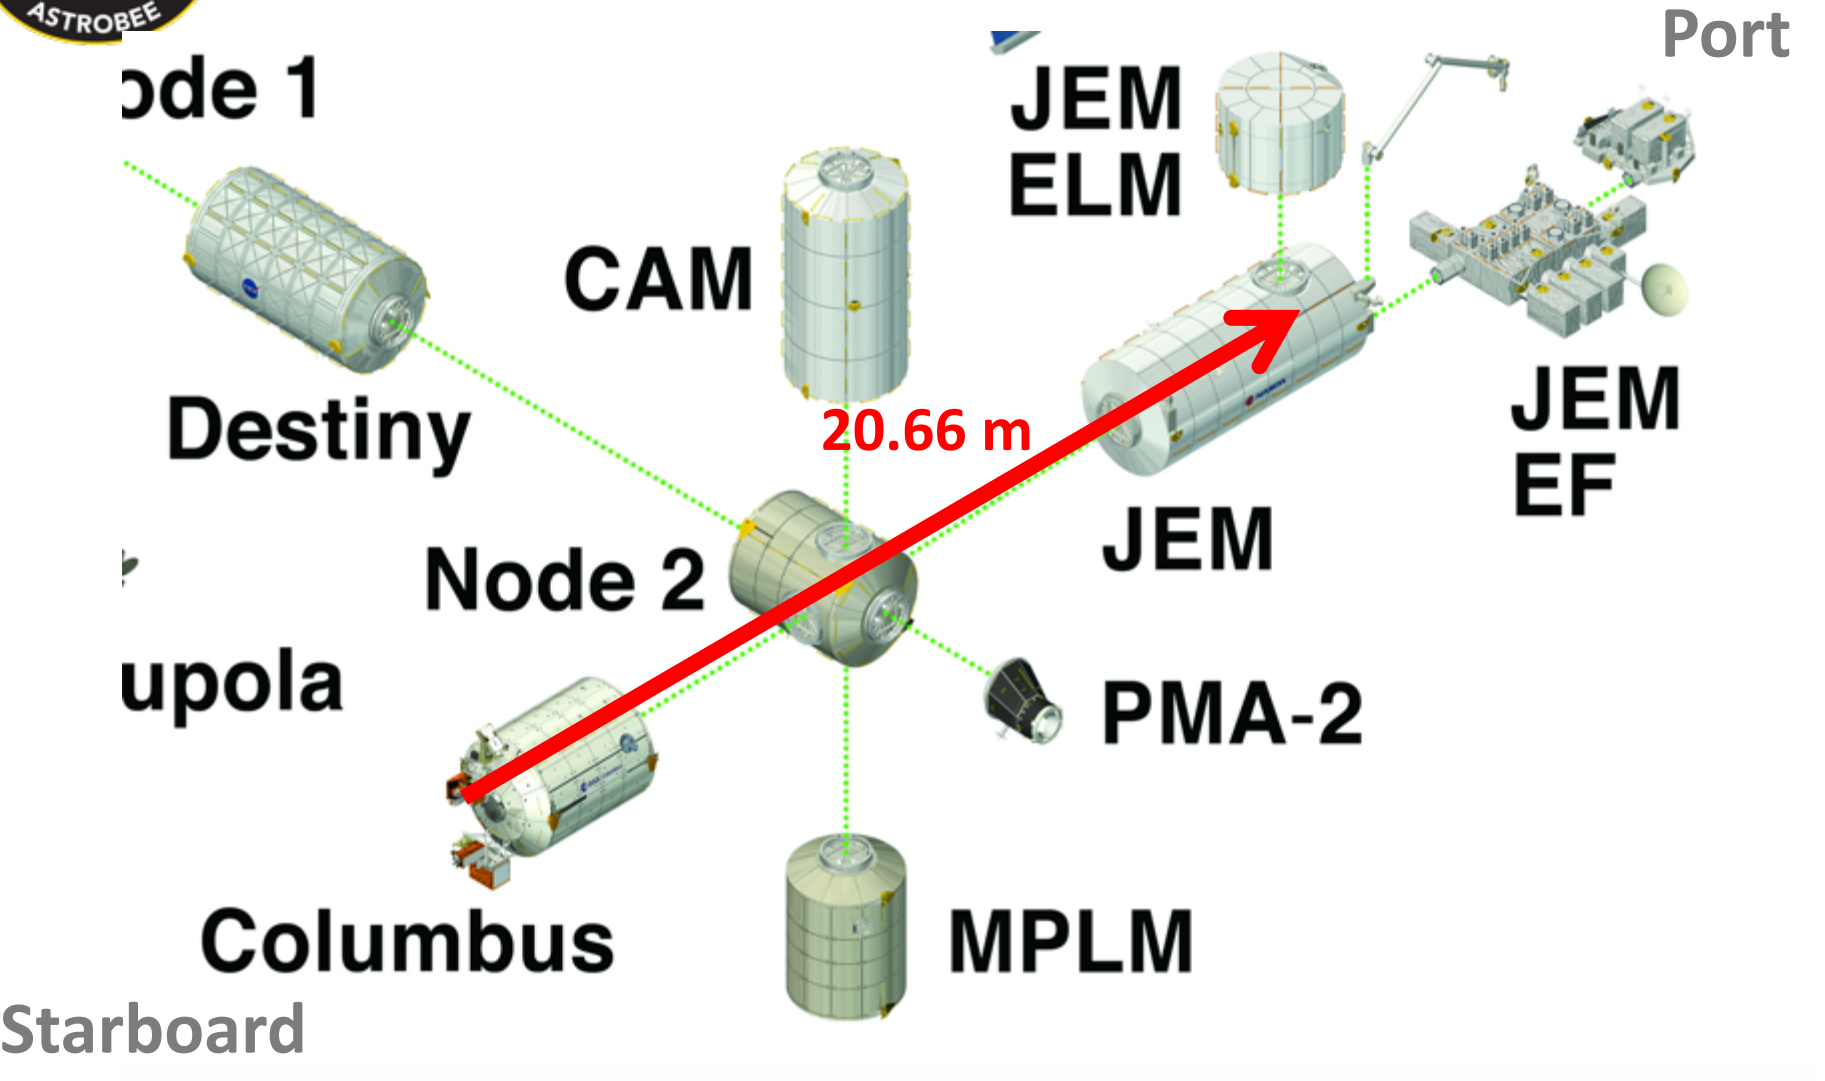



JEM Port End Windows


20" diameter bulkhead windows
port end cone

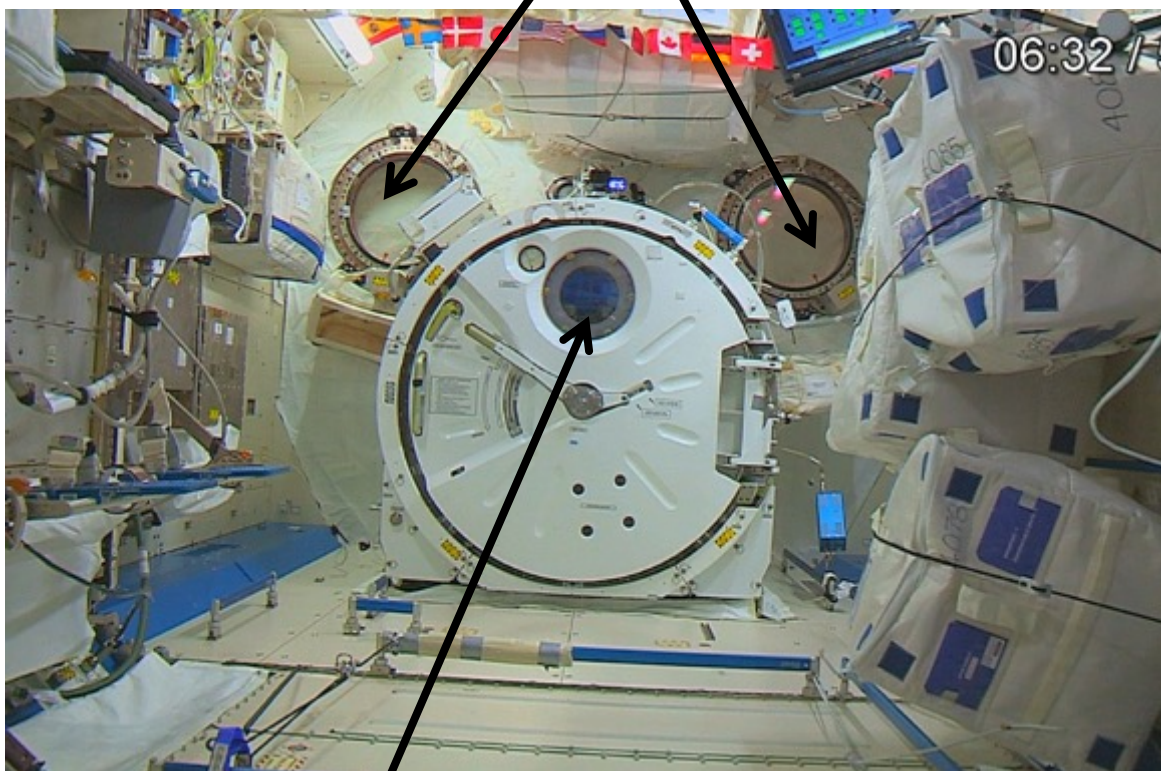

8" diameter airlock hatch window




From Bulkhead Of Columbus Module Looking Towards JEM Thru Node 2

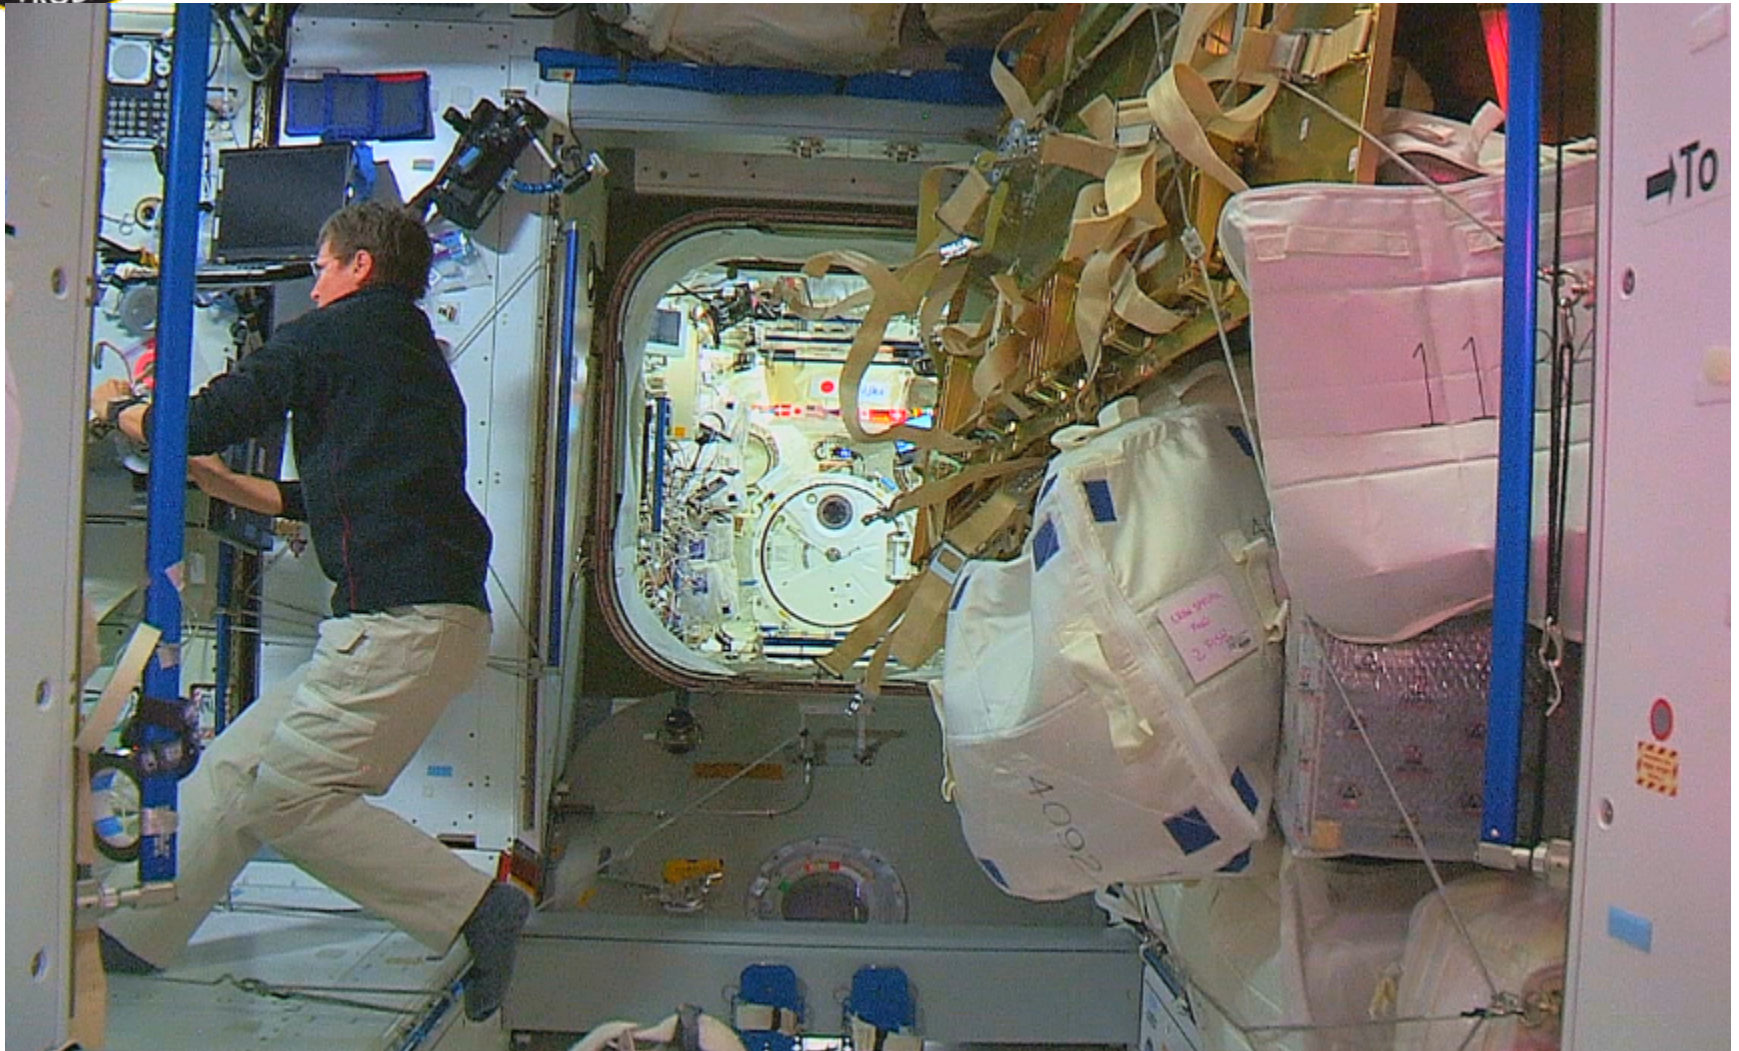



JEM Bulkhead Window (Typical)

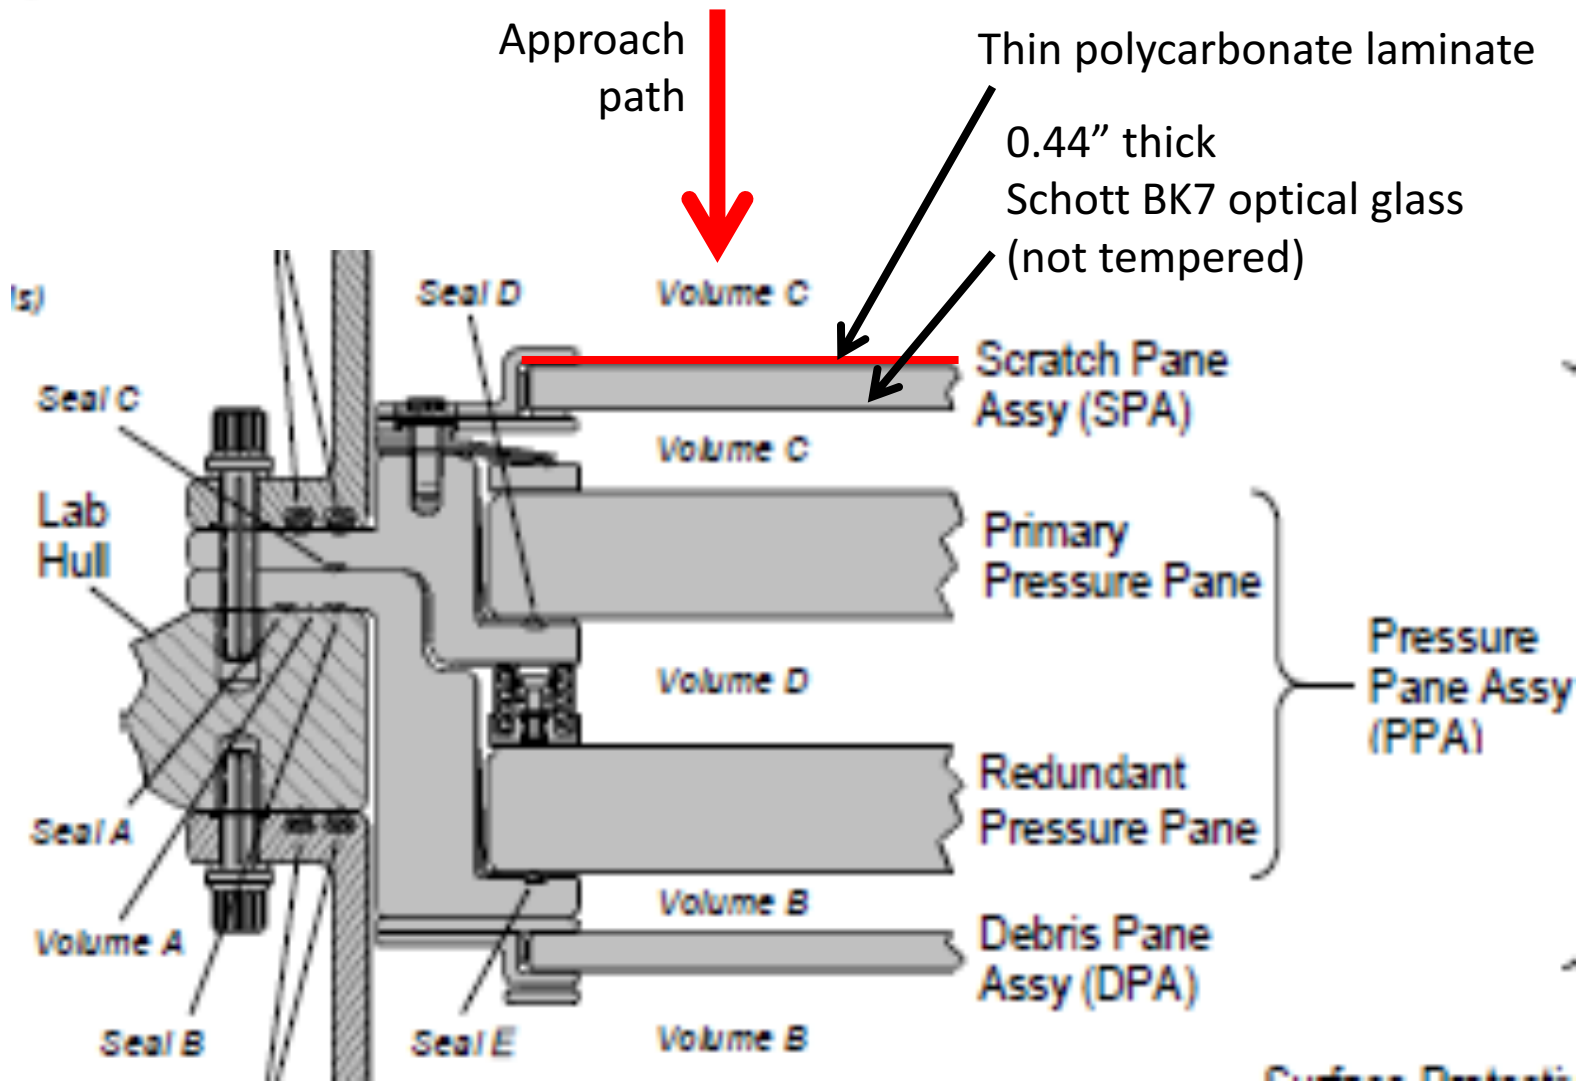



Collision Analogy/Mitigation


- “Bowling ball with knee pads”
 - Astrobee mass (8 kg) comparable to bowling ball (7.25 kg)
 - Bumpers similar material to knee pads
- Analogous drop height in Earth gravity
 - Nominal ops: 50 cm/s = 1.3 cm or 0.5 inch drop
 - Worst-case: 2.1 m/s = 23 cm or 9 inch drop
- Mitigation:
 - Thrust limiting
 - Stakeholders require 10 cm/s² acceleration
 - Design propulsion hardware to ensure thrust can’t go more than 20% above that
 - Limits maximum impact energy
 - Foam bumpers
 - Foam bumpers on propulsion modules; impact-damping material similar to athletic knee pads
 - Foam bounces back after impact and can be reused
 - Rigid hardware is recessed behind bumpers so it doesn’t contact obstacle in a collision



Bumper Geometry

- Geometry ensures any collision will compress bumpers by 0.5 inches of travel before contacting any hard parts (“bottoming out”)


Bumpers at all cube corners

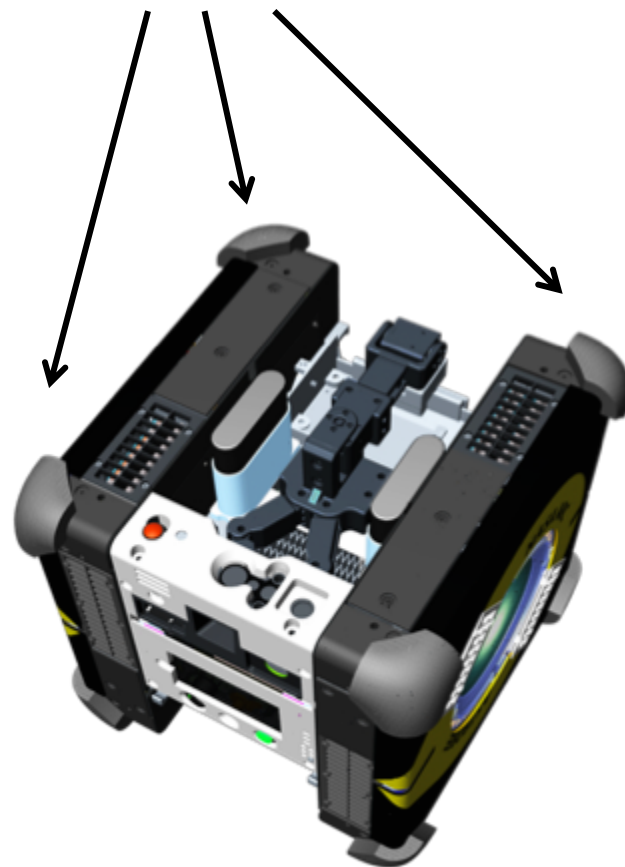



Bumper Design


- Bumper material is ARTiLAGE foam
 - Typically used for e.g. athletic knee pads
 - Bounces back after collision, reusable (unlike earlier baseline design using crushable foam)
- Bumper shape includes inward-facing ribbing
 - Bumper stiffness tunable by changing rib width
 - By design, stiffness is non-isotropic under different load directions:
 - Stiffest in case 1 (load aligned with ribs)
 - Softest in case 3 (ribs buckle more easily under transverse load)
 - Vendor produces custom bumper shape by injection molding
- Nomex fabric cover controls flammability hazard
 - And robustly contains foam
 - Foam also glued to Ultem to minimize slip

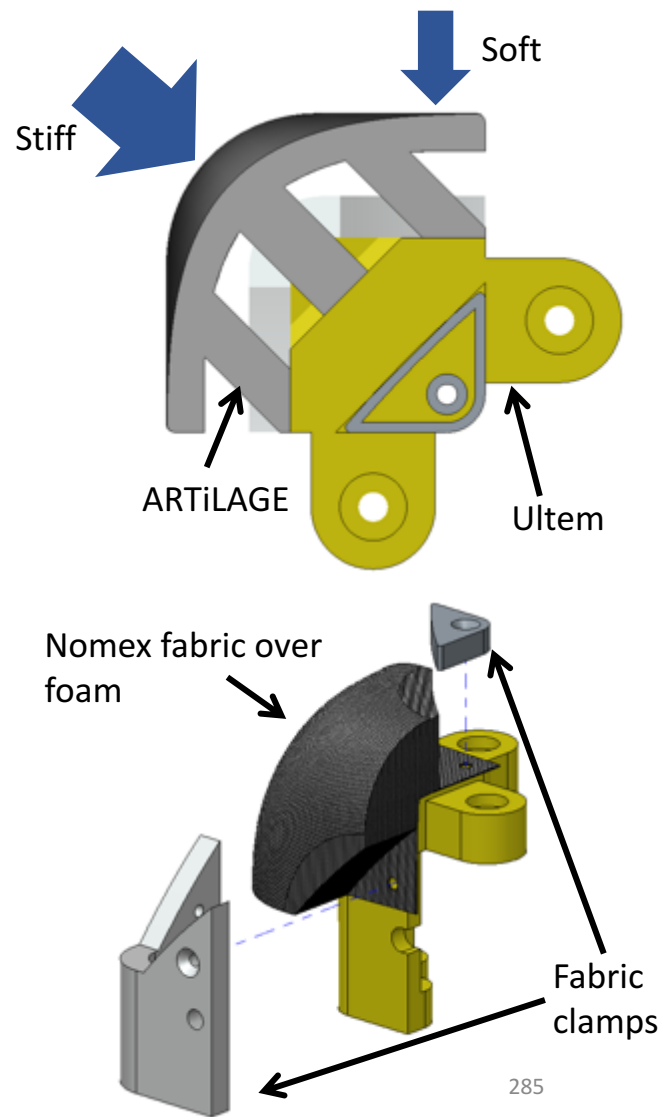



Bumper Collision Test Rig

- Single bumper mounted on an air carriage that slides along a granite post, and impacts target (aluminum plate)
 - Carriage accelerated using rubber bands
- Test single bumper, simulating collision cases 1-3
 - Vary bumper orientation to match case
 - Vary air carriage mass:
 - Case 1: Full Astrobee mass
 - Case 2: 1/2 Astrobee mass (with load distributed evenly over two bumpers, one bumper gets 1/2 mass)
 - Case 3: 1/4 Astrobee mass (with load distributed evenly over four bumpers, one bumper gets 1/4 mass)
 - Cases 2 and 3 actually have multiple possible orientations due to non-symmetry of bumper ribbing (see next page)
- Approach is conservative
 - Rigid air carriage absorbs less impact energy than more compliant Astrobee structure
 - Target also very rigid
- Instrumentation
 - Target mounted on force table to measure force vs. time
 - Impact velocity measured by differentiating position, as measured with LVDT
 - Carriage also instrumented with accelerometer

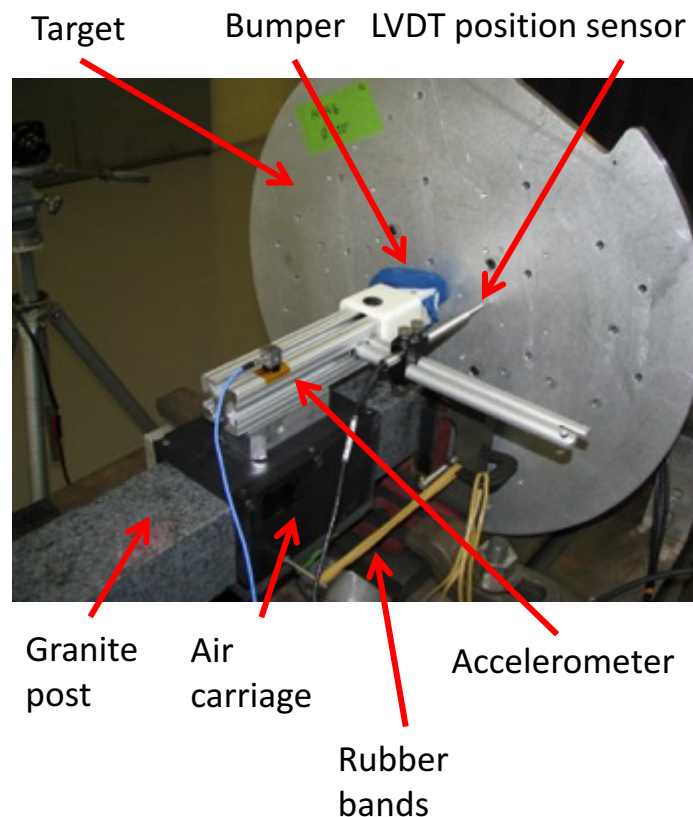



Conclusion

Obstacle type	Hazard classification	Reasoning behind classification
Crew	Critical	Crew can translate at high speed and run into stationary or moving Astrobee, possibly suffering minor injuries. Will pursue equivalent-safety NCR.
Window	Marginal <i>but</i> request continuing PSRP involvement	No window damage in collisions below 75 cm/s; force remains below crew pushoff load. At faster speeds, scratch pane may fracture, but: <ul style="list-style-type: none">• Polycarbonate film excludes glass from crew cabin• Neither pressure pane is at risk
ISS Structure	Marginal	Pending approval by ISS structures experts, based on force data from bumper collision test rig. Basic intuition is robot is too light, slow, and soft to damage structure.
Projecting Hardware	Marginal	Projecting hardware should already be robust to crew pushoff loads, is typically mounted on compliant structure such as a Bogen arm (reducing peak force), and is typically ORU / non-critical-path



Agenda


Time	Duration	Presenter	Topic
8:30	0:30	Terry, Chris	Welcome/Intro
9:00	1:30	Trey, Team Leads	Design
10:30	0:15		<i>Break</i>
10:45	1:15	Team Leads	Design
12:00	0:45		<i>Lunch</i>
12:45	0:30		<i>Demo</i>
13:15	1:15	Team Leads	Design
14:30	0:15		<i>Break</i>
14:45	0:30	Trey	Systems Engineering
15:15	0:30	Jonathan	Integration & Test
15:45	0:30	Ernie	Safety
16:15	0:15	Chris	Project Management
16:30	0:15	Maria	Operations
16:45	0:15	Chris	Conclusion



BACKUP SLIDES



JEM Airlock Hatch Window Structure

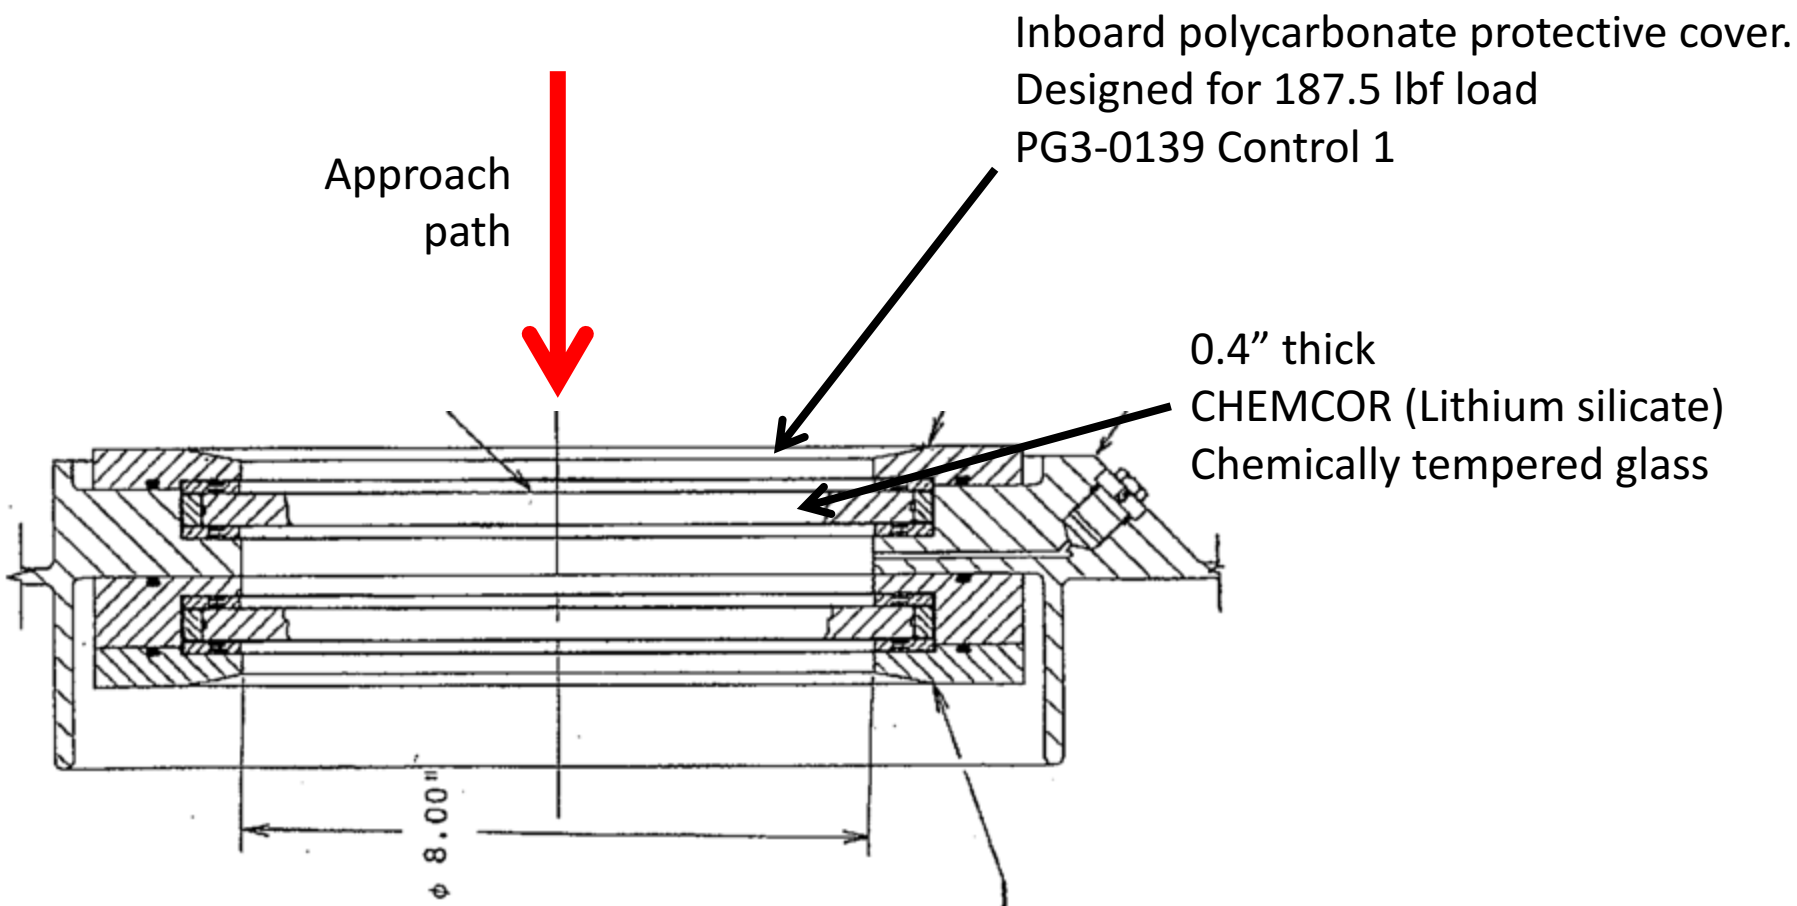


We can focus impact analysis on the bulkhead windows, because hatch windows are less vulnerable. They are (1) protected by a cover, (2) made of tempered glass, (3) smaller.



Bulkhead Window Collision Consequences

Thin polycarbonate film

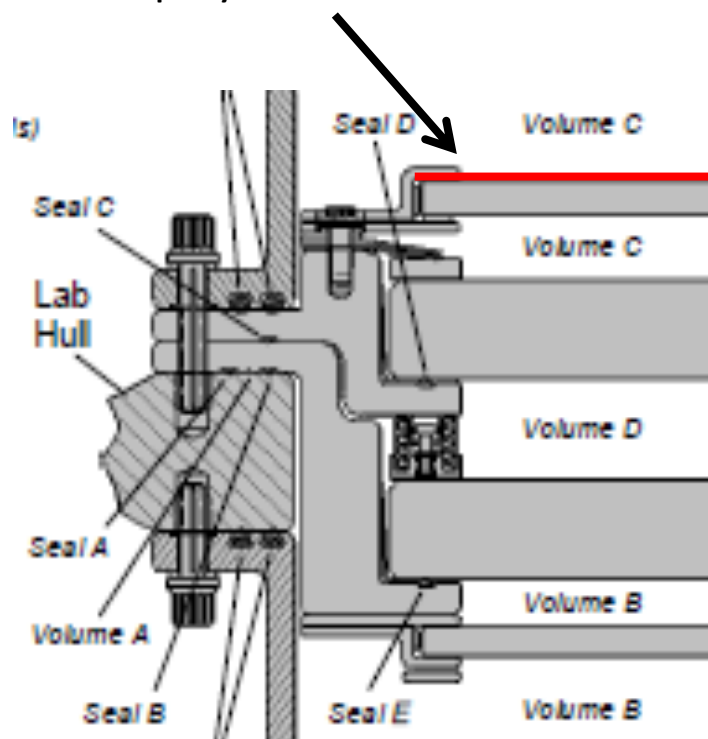

- (This is based on common sense rather than rigorous engineering analysis.)
- At the relevant impact energy, main concern is scratch pane structural failure
 - At speeds below 75 cm/s, Astrobee bumpers are designed to keep peak force below 125 lbf, which is the rated/tested max force the scratch pane can withstand without damage
 - At speeds between 75 cm/s and 2.1 m/s, the scratch pane may fracture, but further damage, such as puncturing the polycarbonate film, or damaging a pressure pane, is viewed as extremely unlikely
- If scratch pane fractures, polycarbonate film will prevent fragments from entering the crew cabin: no risk to crew
- This leads to “marginal” hazard classification



New Hazard Definitions

- **4.2 HAZARD LEVELS**

- Hazards are classified according to potential as follows:

- **4.2.1 MARGINAL HAZARD**

- Any condition which may cause **damage to an ISS element in a non-critical path or minor crew discomfort** that does not require medical intervention from a second crewmember, and/or consultation with a Flight Surgeon.

- **4.2.2 CRITICAL HAZARD**

- Any condition which may cause a non-disabling personnel injury or illness, loss of a major ISS element, loss of redundancy (i.e. with only a single hazard control remaining) for on-orbit life sustaining function, or loss of use of the SSRMS.

- **4.2.3 CATASTROPHIC HAZARDS**

- Any condition which may cause a disabling or fatal personnel injury or one of the following: loss of ISS, loss of a crew-carrying vehicle, or loss of a major ground facility.

- **[From DCN4 of SSP 51700]**



Different Types of Glass Fracture



Sharp object / thick glass

“Gravel on the windshield”

Stresses localized

Surface scratched, chipped, or punctured



Blunt object / thin glass

“Structural failure”

Stresses distributed broadly across pane


Glass deflects like a beam, then breaks

(This is our main concern – Astrobee is a blunt object, much softer than glass)



Glass Structural Failure

- Glass is much stronger under compression than under tension (several orders of magnitude!)
- Sheet glass structural failure almost always occurs due to microscopic cracks on the surface propagating inward when the glass is under tension

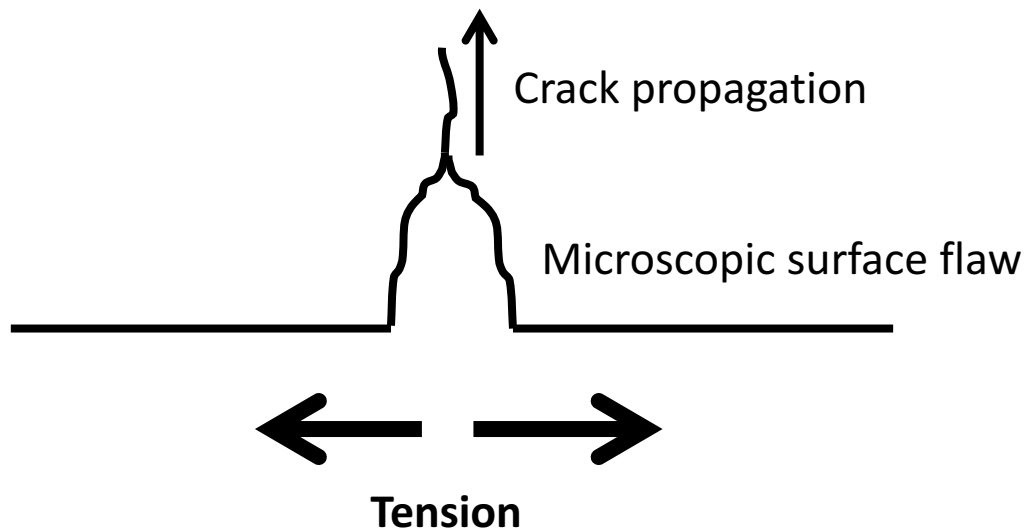




Tensile Strength

- The effective tensile strength of sheet glass depends on the number and size of flaws on the surface
- Different panes of glass in the same batch can have substantially different strength due to random flaws
 - Likelihood of breaking under load often modeled with Weibull distribution
- Mechanical and chemical polishing can reduce the number of flaws
- Effective tensile strength of the glass also depends on:
 - The amount of surface area placed under tension – a larger area is more likely to have a large flaw, thus weaker
 - The duration of the tension – shorter durations leave less time for crack propagation, thus glass is effectively stronger




Looking Into JEM From Node 2

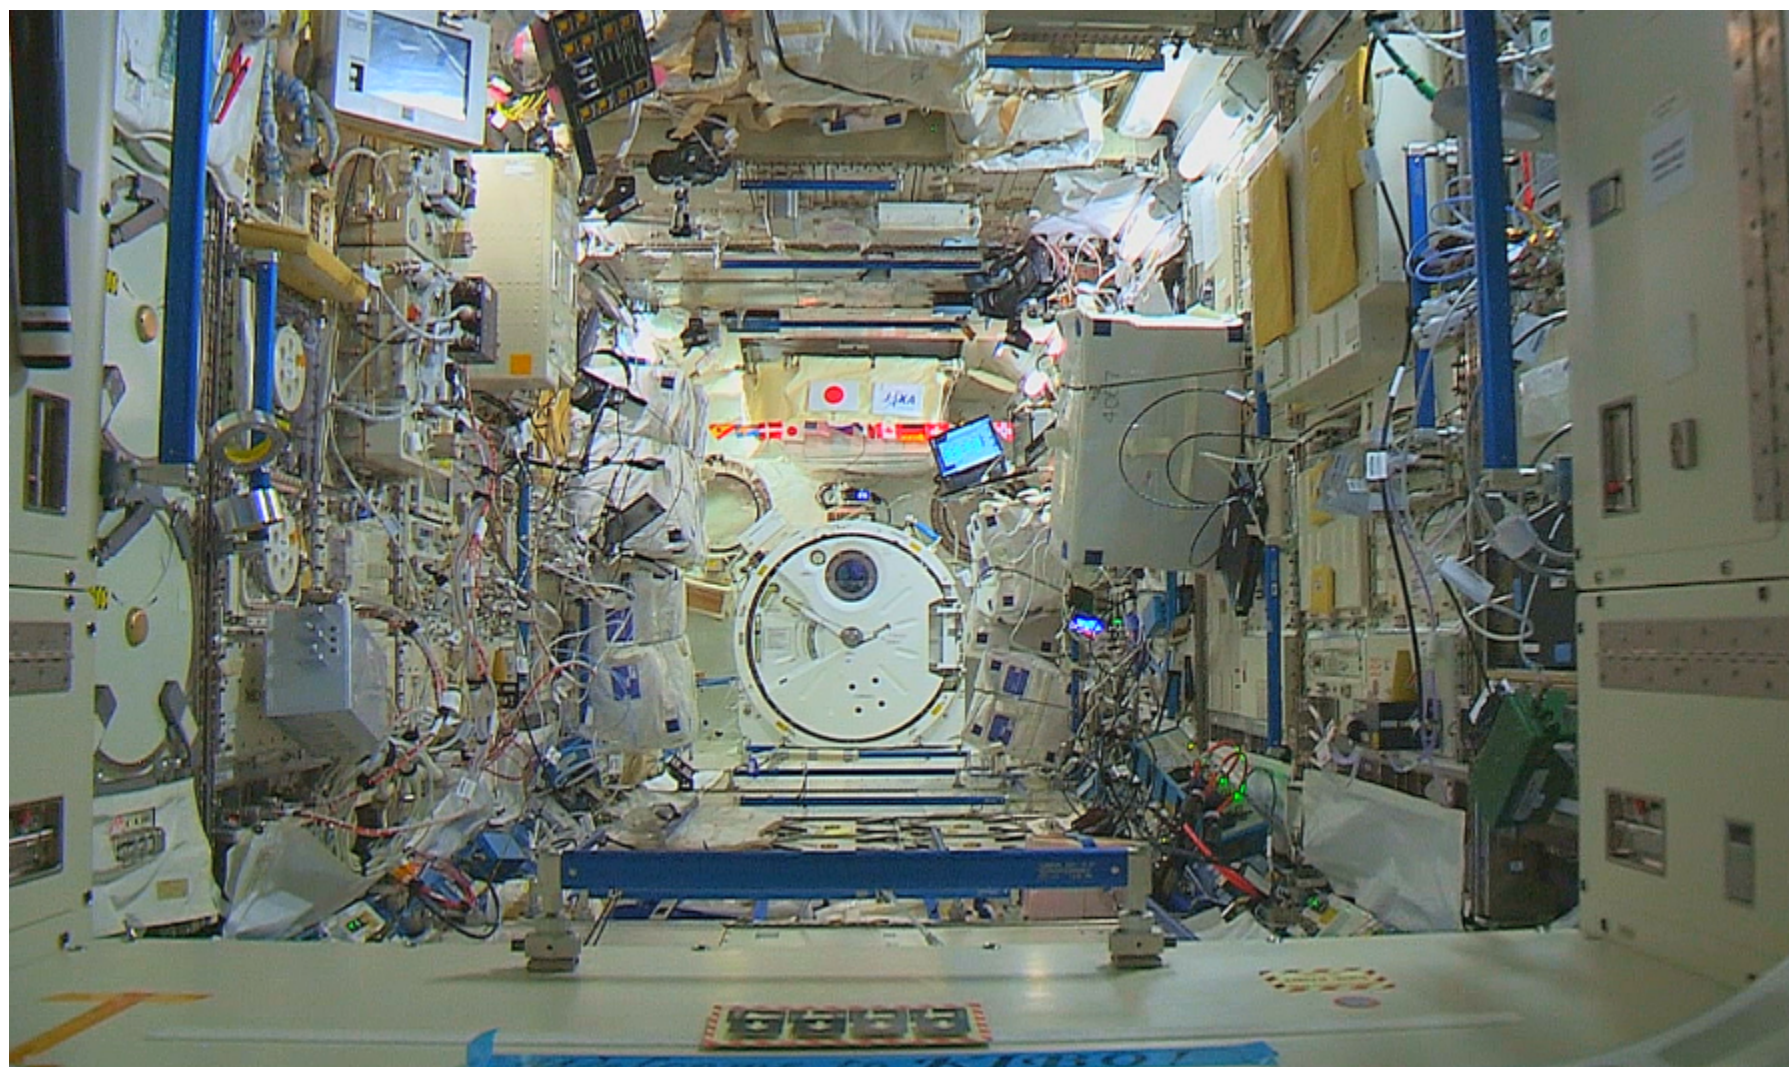




From Hatch-End Columbus Module Looking Towards JEM Thru Node 2

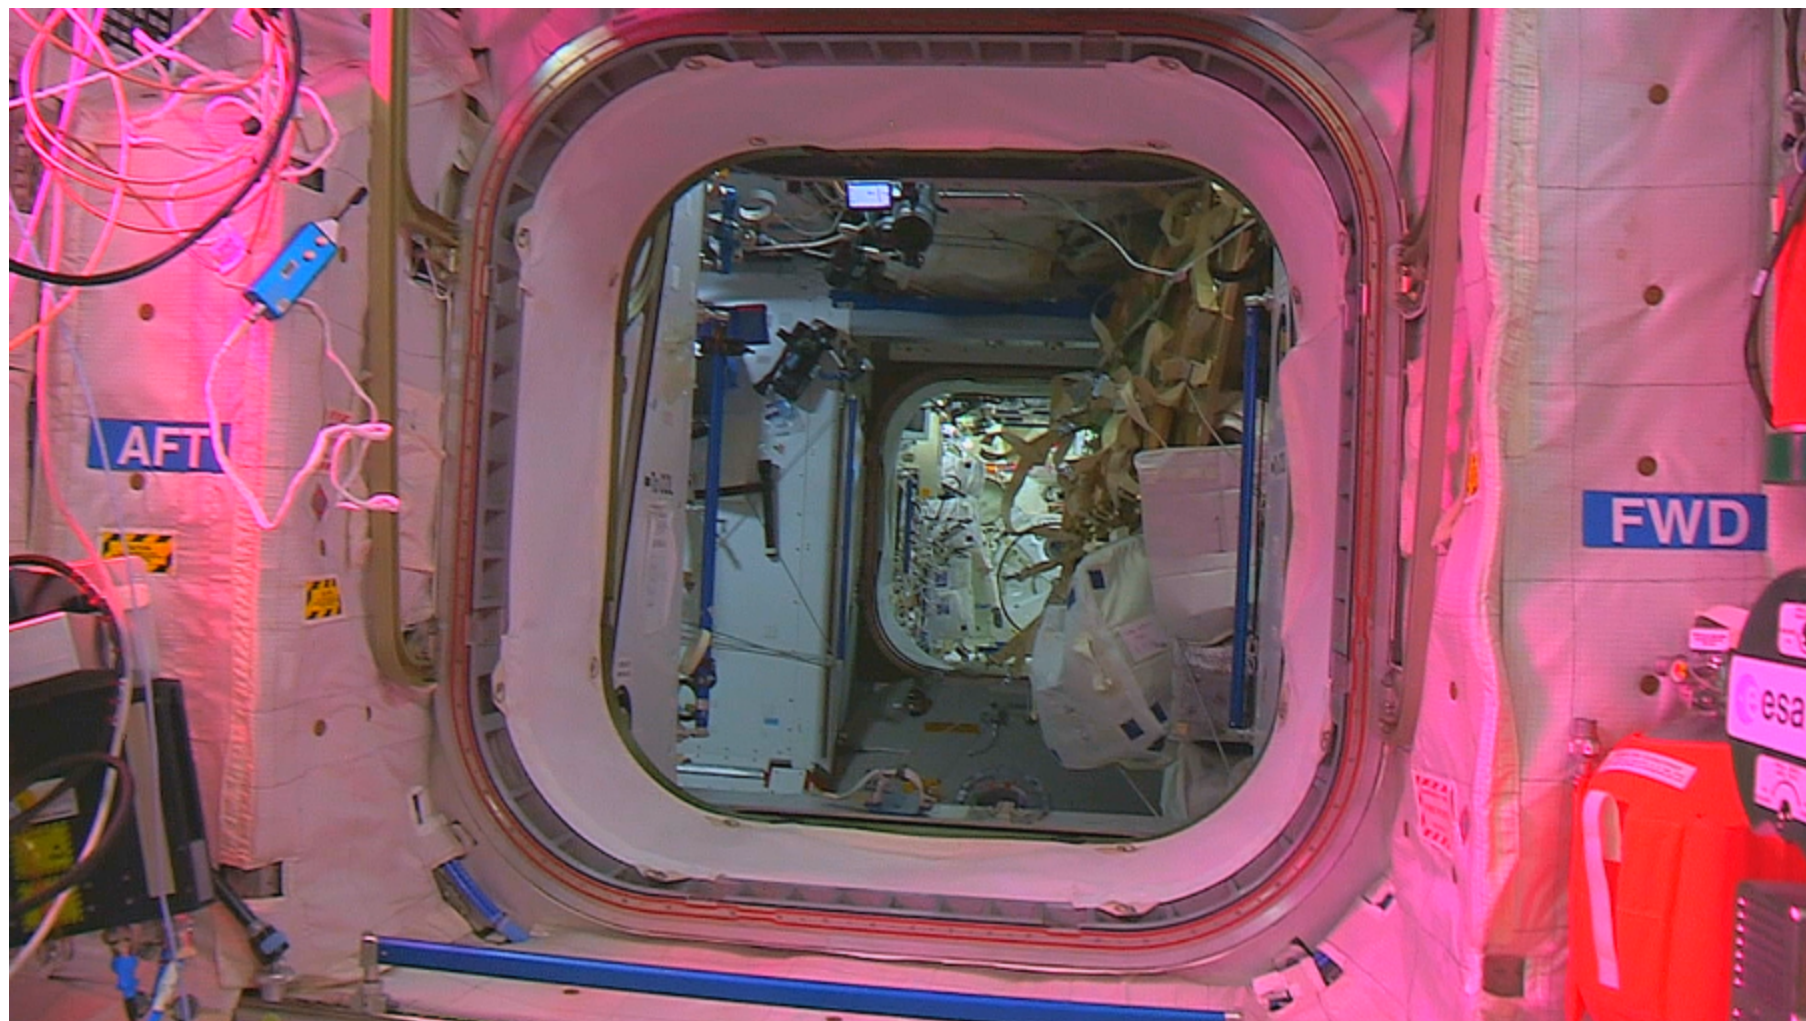



From Mid-Columbus Module Looking Towards JEM Thru Node 2

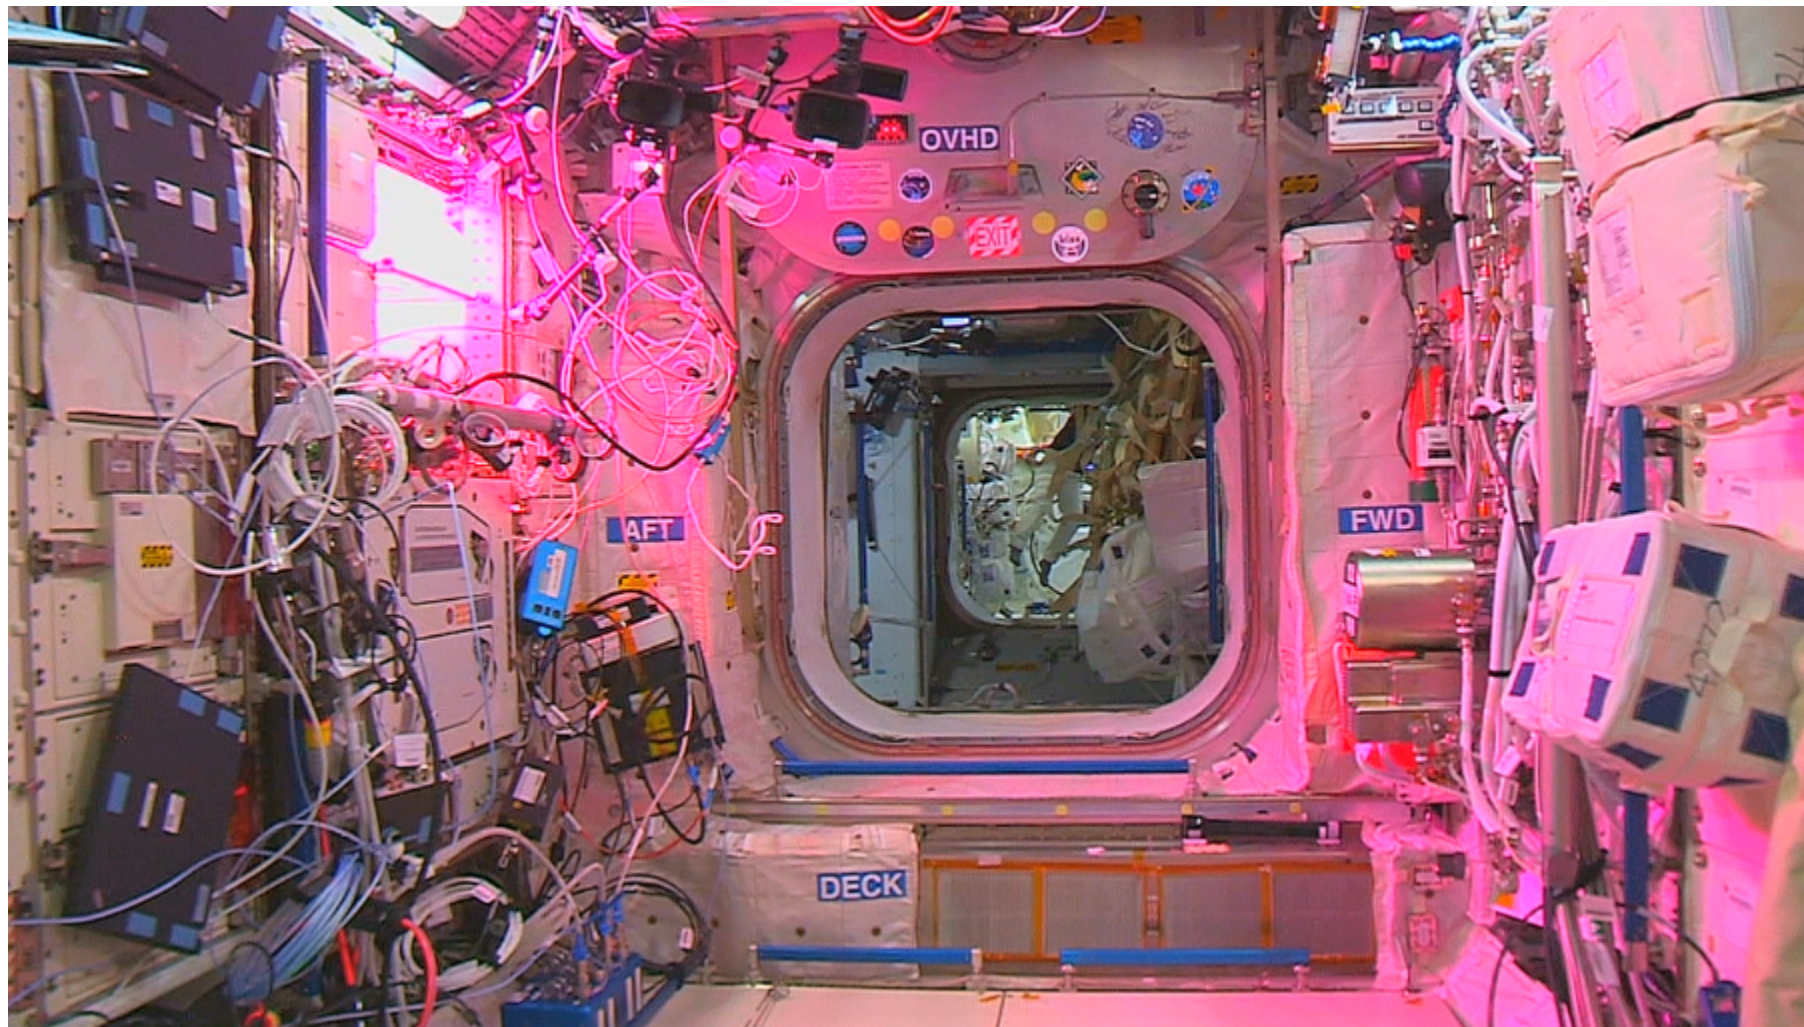



Collision Mitigation Tiers

Tier	Safety critical?	Purpose	Controls
1	No	Ensure that Astrobee will seldom collide with an obstacle at any speed.	<ul style="list-style-type: none">• Crew awareness• Automated path validation• Manual path validation• Obstacle avoidance
2	No	Ensure that Astrobee is unlikely to ever collide with an obstacle at speed greater than 75 cm/s.	<ul style="list-style-type: none">• Single fault tolerant over-speed propulsion cutoff
3	Yes	Ensure that Astrobee will never endanger critical path ISS functions or crew health.	<ul style="list-style-type: none">• Thrust limiting• Foam bumpers



Tier 1 Controls (Non-Safety Critical)

- Crew awareness
 - Crew will be advised when/where Astrobee is flying
 - Activities will be scheduled using timelines, covered in daily briefings, announced by Capcom
 - Astrobee flight plans will avoid high-traffic areas with poor visibility
 - Prefer to operate in wide open spaces and “dead end” modules like Columbus/JEM when possible
 - Avoid areas where crew is moving around a lot, e.g. cargo transfer ops
 - Astrobee will use signal lights and speakers to notify crew that it is present
 - Details TBD; consulting with crew office, balance with minimizing crew annoyance
- Automated path validation
 - Control station has list of keepout zones such as known obstacles, areas with high disturbance air flow, areas with sensitive equipment, etc.
 - Automatic validation checks that path maintains sufficient distance from keepouts
- Manual path validation
 - Control station provides visualization of planned path in 3D model of ISS prior to execution
 - Operator can validate path based on their situation awareness about ISS environment
- Obstacle avoidance
 - Astrobee can detect unknown obstacles ahead with its HazCam
 - The robot will stop and wait for operator assistance to continue



Tier 2 Controls (Non-Safety Critical)

- Single fault tolerant over-speed cutoff
 - Two independent over-speed cutoffs
 - Primary pose estimator running on Low-Level Processor
 - Dedicated velocity estimator running in SpeedCam firmware
 - Each can independently shut off propulsion
 - Both estimate speed using robust approach
 - Take into account history of previous samples
 - Track both the speed estimate and confidence/accuracy
 - Tiered response:
 - If speed estimate confidence is too low, or there is a “mild over-speed” condition ($\sim 50\text{-}75\text{ cm/s}$), command a stop and signal an error to the operator.
 - This response will be somewhat configurable, with caution, in case certain guest science experiments interfere with accurate speed sensing.
 - Example: Might disable this response, but add ops controls such as requiring crew supervision.
 - If speed exceeds 75 cm/s , shut off propulsion.
 - This response will not be configurable.




Tier 3 Controls (Safety Critical)

- Thrust limiting
 - Stakeholders require 10 cm/s^2 acceleration
 - Design propulsion hardware to ensure thrust can't go more than 20% above that
 - Limits maximum impact energy
- Foam bumpers
 - Foam bumpers on propulsion modules; impact-damping material similar to athletic knee pads
 - Foam bounces back after impact and can be reused
 - Rigid hardware is recessed behind bumpers so it doesn't contact obstacle in a collision



Over-Speed Cutoff Approach

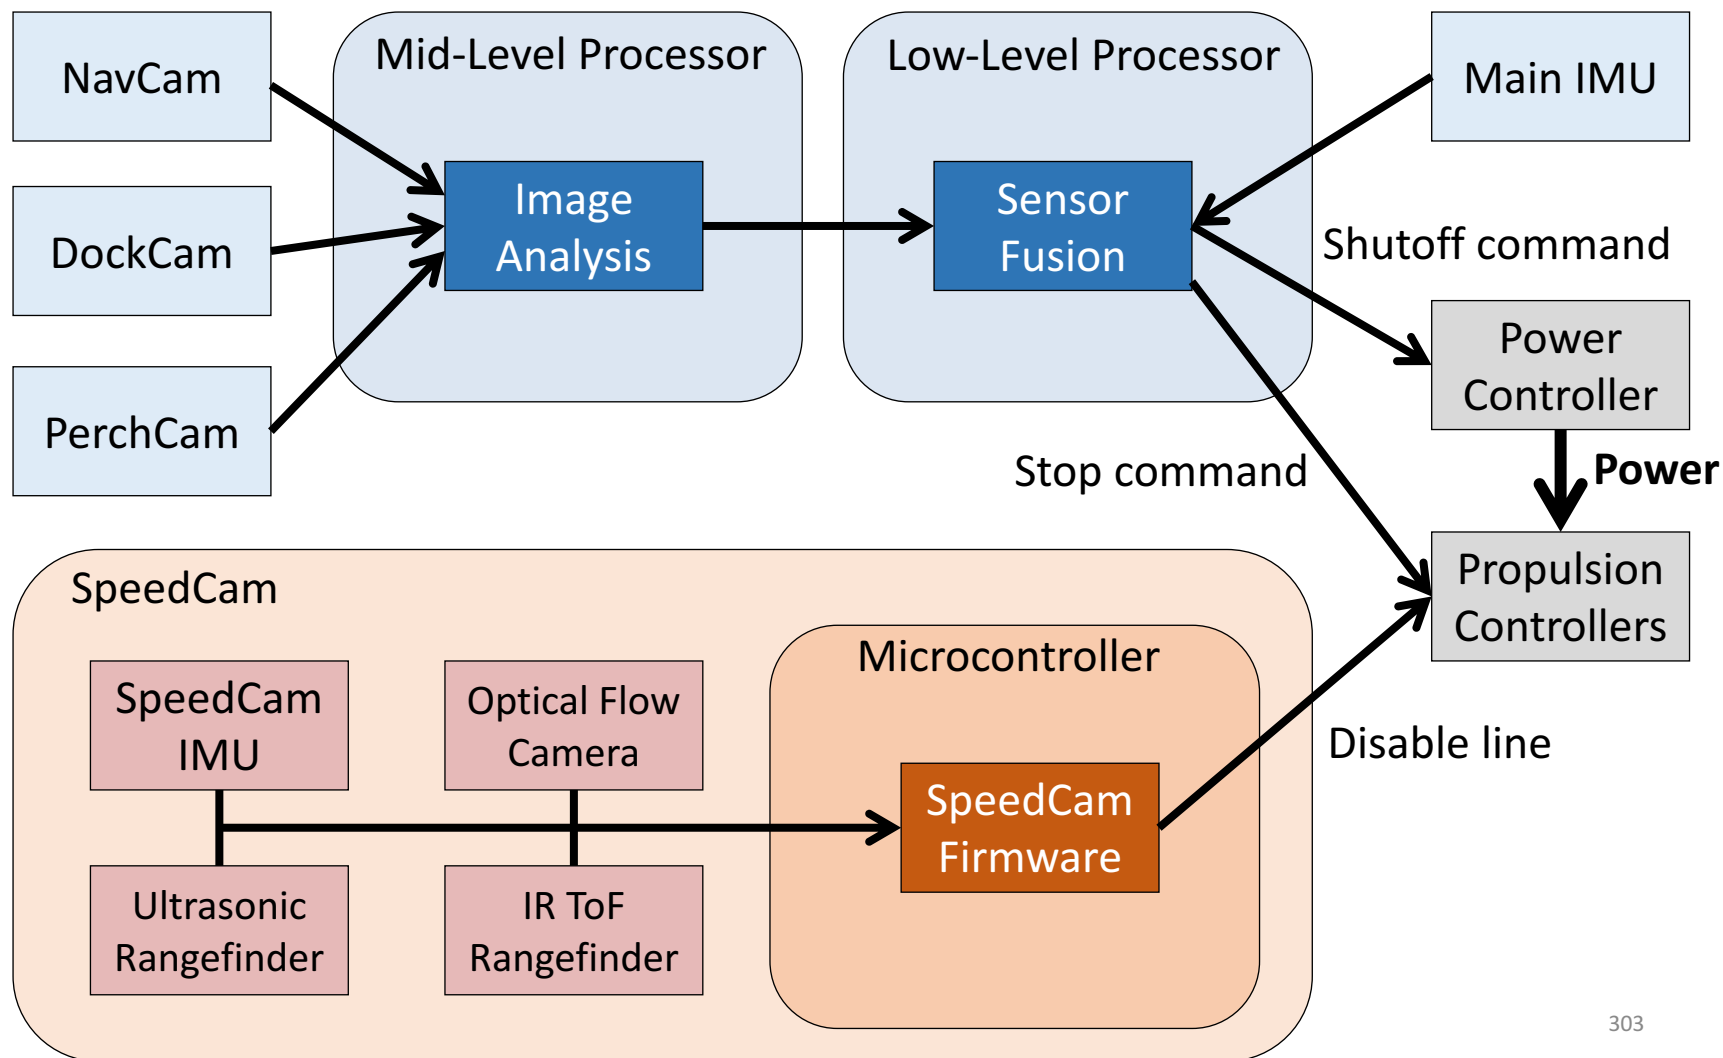



Over-Speed Cutoff Verification

- Test each of the cutoff systems independently (by disabling the other cutoff system)
- Use gantry testing facility, accelerate to over-speed condition
- Verify propulsion module is shut off as intended



Thrust Limiting Approach

- Impeller motor controller firmware (COTS, proprietary) controls thrust of each prop module
 - During integration, set impeller motor controller max RPM rate
 - Configures what impeller RPM rate is implied by the max PWM command from our software
 - Flight software can't accidentally reconfigure the controller on-orbit; that would require connecting a laptop to a debug port
 - Assuming motor controller behaves correctly, there is no way for our software to command excessive RPM rates
- Off-axis thruster geometry provides redundant limit
 - If a single propulsion module somehow goes over the thrust limit, due to off-axis thrusters, the robot will fly in circles
 - To follow a straight path at higher acceleration, **both** propulsion modules would need to malfunction simultaneously




Thrust Limiting Verification

- Test worst-case commands
 - Max PWM command to impeller motor controller
 - Nozzles controls set to maximize thrust
 - Verify thrust is below limit




Collision Geometry


- Bumper design aims to keep force below 125 lbf limit in a 75 cm/s collision
 - Limit derived from scratch pane load limit: scratch panes were tested under simulated crew pushoff load
- Bumper stiffness optimized to minimize peak force at 75 cm/s
 - Bumpers will bottom out in higher-speed collisions, less effective
 - But they still absorb some impact energy and spread load over a wider contact area
- Can focus design/testing on extreme collision cases 1-3 (shown at right)
 - Bumpers need to be stiff enough to avoid bottoming out in case 1 (highest pressure)
 - Bumpers need to be soft enough to keep total force low in case 3 (highest contact area)
- Typical impact is less challenging than extreme cases, because force is distributed across multiple bumpers that strike at different times, keeping the peak total force lower

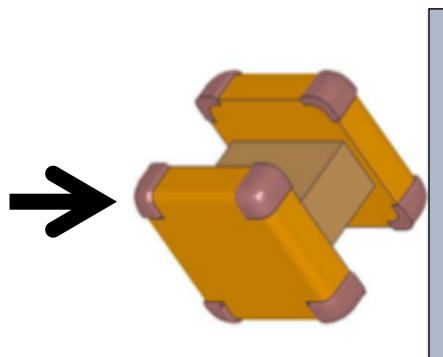


1. Perfect corner impact: All load on 1 bumper

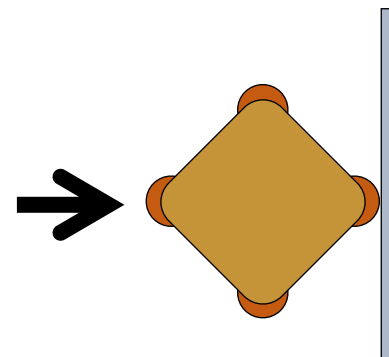

2. Perfect edge impact: Load evenly distributed over 2 bumpers, simultaneous

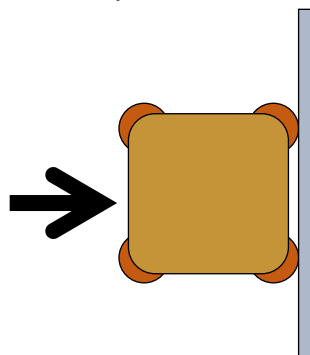


3. Perfect face impact: Load evenly distributed over 4 bumpers, simultaneous

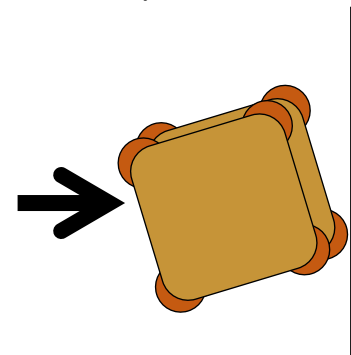

Typical impact: Load unevenly distributed over 4 bumpers, non-simultaneous




COLLISION TESTING

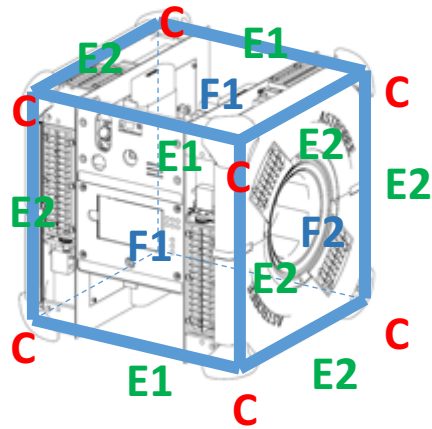

Due to non-symmetry of bumper ribbing, not all impact directions are equal.

Impact	I.D.	Mass	Bump er Test No.
Corner	C	1M	4
Core Edge	E1	$\frac{1}{2}$ M	1
Prop Edge	E2	$\frac{1}{2}$ M	6
Core Face	F1	$\frac{1}{4}$ M	3
Prop Face	F2	$\frac{1}{4}$ M	2

Bumper Test No.

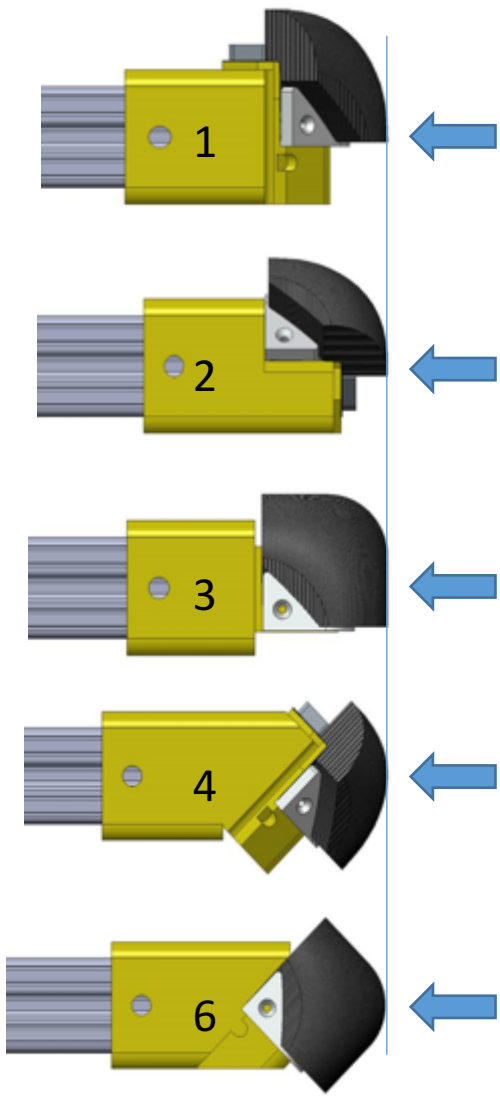




Collision Testing Status

- Initially tested ribbed bumper 3D printed in rubber material (“Tango”), selected for quick prototyping turnaround
- First Tango test results at 75 cm/s show peak force under or close to crew pushoff limit for all collision cases
 - Actual ARTiLAGE material has 1.4x lower Young’s modulus than Tango, so forces are expected to be lower (under limit)
- We just received our first molded ARTiLAGE bumpers from the vendor
 - Gearing up for collision testing over the next 1-2 weeks
 - New tests will include runs at 2.1 m/s – ideally, the force measurements from this test will allow us to classify the high-speed structure collision risk as “marginal”



Sample Collision Data*

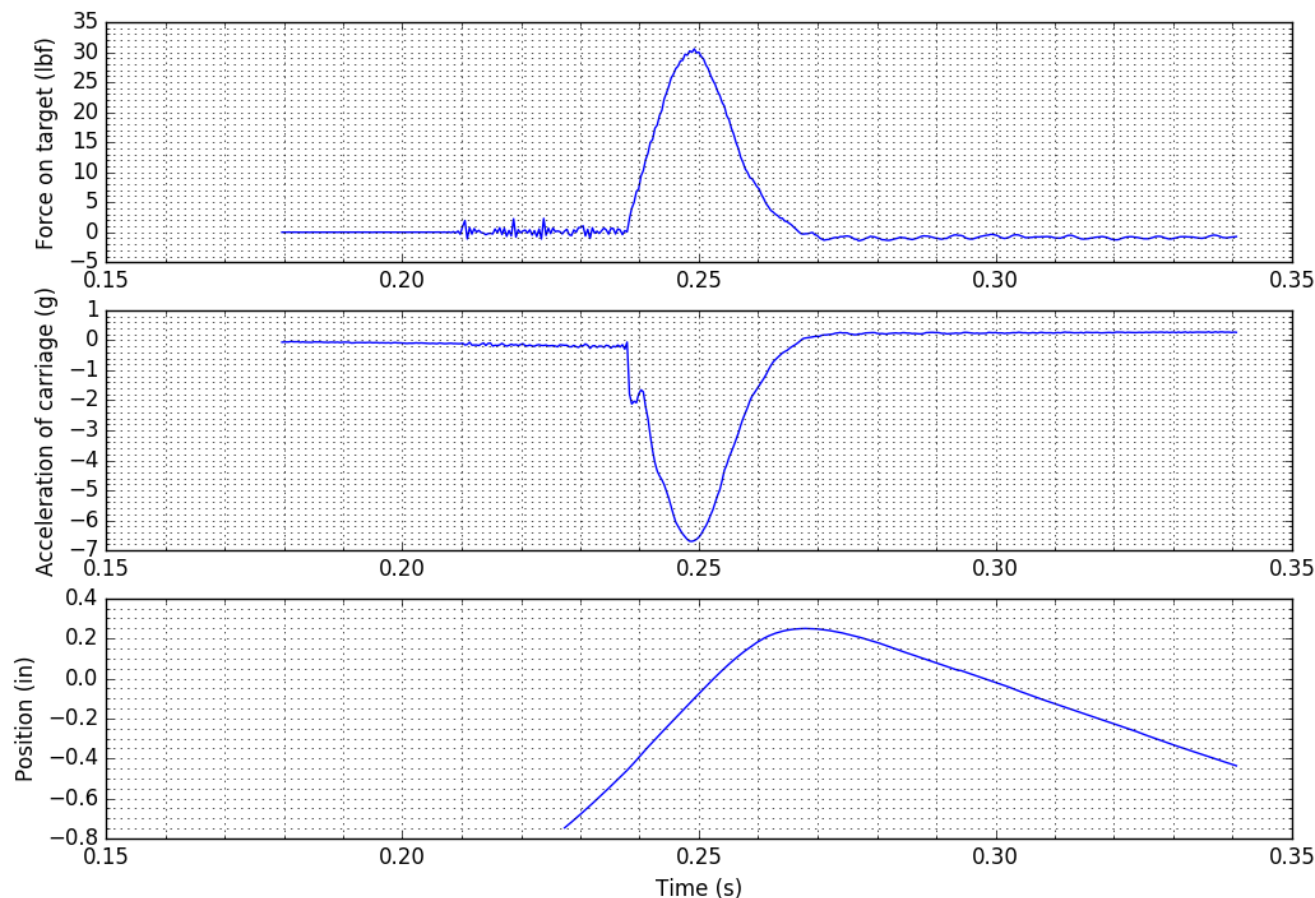


* The setup from this test is not finalized/correct for requirements verification, just provided as a reference example. Run 24: Tango bumper, collision case 3, ~75 cm/s impact velocity.

Astrobee Project Management



Schedule, Budget, Top Risks

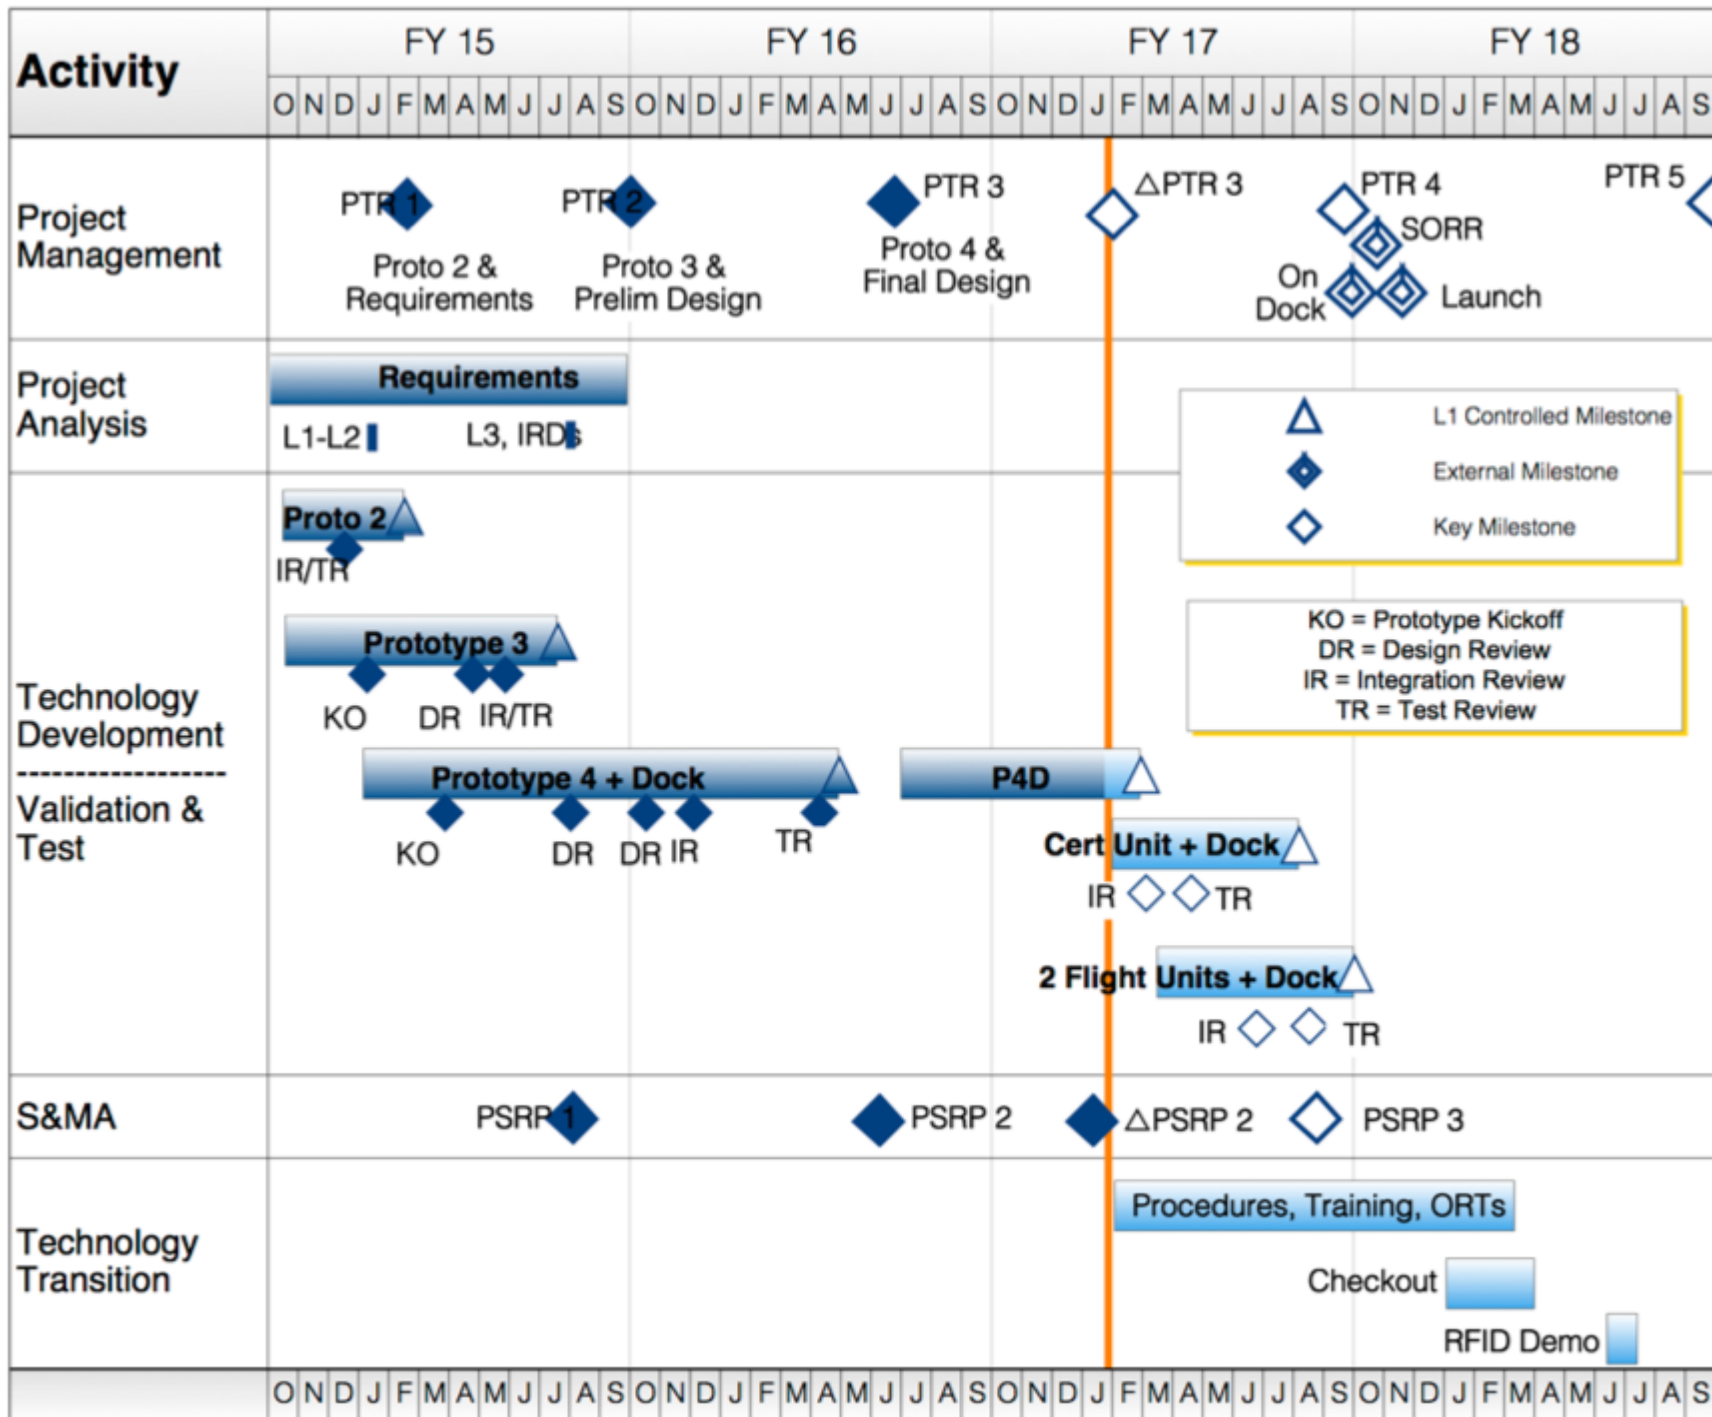



Budget

	FY15	FY16	FY17	FY18	Total
FTE	11	12	12	6	41
Procurement (\$M)	2.55	3.15	2.95	2.4	11.05



Parts Costs

Free Flyer	\$165,400	
<i>Structure</i>	<i>\$55,000</i>	→
<i>CDH</i>	<i>\$12,500</i>	
<i>FSW</i>	<i>-</i>	
<i>Prop</i>	<i>\$81,000</i>	→
<i>EPS</i>	<i>\$6,200</i>	
<i>GNC</i>	<i>\$1,900</i>	
<i>Comm</i>	<i>\$300</i>	
<i>Thermal</i>	<i>\$500</i>	
<i>Arm</i>	<i>\$8,000</i>	
Dock	\$50,000	
<i>Structure</i>	<i>\$44,000</i>	→
<i>Avionics</i>	<i>\$6,000</i>	

*Shop Costs
(~ 50% CS Labor,
50% Proc)*

*\$45K **

*\$40K **


*\$40K **

** Possibly
reduce by 50%
by using outside
vendors.
Still assembling
quotes.*

*Material & fab cost only
Assembly costs not included*



Top Risks

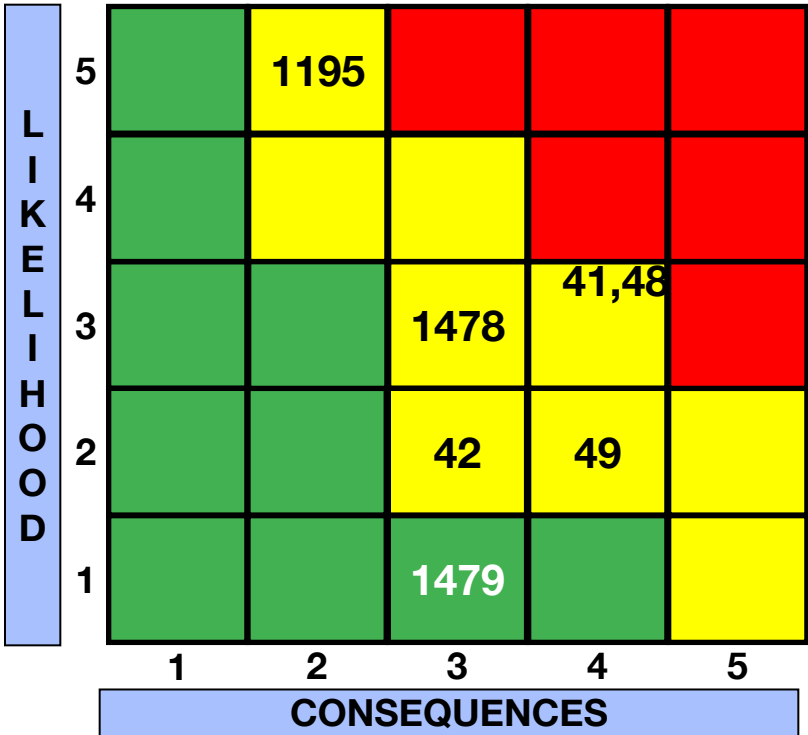

Criticality

High

Med

Low

Affinity

T - Technical

C - Cost

Sa – Safety

Sc - Schedule

Approach

M - Mitigate

W - Watch

A - Accept

R - Research

Risk ID Trend*	Approach Affinity	Risk Name
48	M Sc	Flight Unit schedule
41	M Sc	Cert Unit schedule
1195	M T	Negative mass margin
1478	R C, Sc	Flight hardware costs & phasing
49	W Sa	PSRP approval for operations without crew tending
42	M T	Pose accuracy with vision based navigation
1479	W C, Sc	QA & QC requirements
1449		Dock placement not determined

* Risk numbers not sequential



Agenda

Time	Duration	Presenter	Topic
8:30	0:30	Terry, Chris	Welcome/Intro
9:00	1:30	Trey, Team Leads	Design
10:30	0:15		<i>Break</i>
10:45	1:15	Team Leads	Design
12:00	0:45		<i>Lunch</i>
12:45	0:30		<i>Demo</i>
13:15	1:15	Team Leads	Design
14:30	0:15		<i>Break</i>
14:45	0:30	Trey	Systems Engineering
15:15	0:30	Jonathan	Integration & Test
15:45	0:30	Ernie	Safety
16:15	0:15	Chris	Project Management
16:30	0:15	Maria	Operations
16:45	0:15	Chris	Conclusion

Operations



Technology Transition Plans



Level 1 Requirements to be Verified on ISS

- Remote control (FFREQ-75)
- Sensor surveys (FFREQ-77)
- Autonomous resupply (FFREQ-80)
- Store science data (FFREQ-81)
- 0g research capabilities (FFREQ-82)
- Host payloads (FFREQ-83)
- Compatible with ISS crew (FFREQ-84)
- Software upgrades (FFREQ-87)
- Stream/record high quality video (FFREQ-89)
- Multi free flyer operations (FFREQ-90)



Success Criteria

Minimum Success Criteria	Full Success Criteria
ISS Demonstration of: <ul style="list-style-type: none">• Ground control• JEM/Node 2/US Lab map• Software upgrade• Hazard detection• Dock/undock• Streamed video• Payload & Guest Science (GS) operations	ISS demonstration of: <ul style="list-style-type: none">• Crew control• USOS map• Signal lights• Perch/unperch• Multi-robot operations• Mobile camera operations
Handover of all deliverables	Completion of all transfer activities within FY18



Activity Task Sequence

- Crew Training
- Ground Training
- Crew Procedures
- Ground Procedures
- Operational Readiness Test
- On-orbit Operations



ISS Activities

- Installation
- Comm Checks (Store science data, Software upgrades, High quality video)
- Component Checkouts
- Initial Mapping
- Basic Mobility (Remote control)
- Autonomous Mobility (Autonomous resupply)
- Crew Interface Checkout (Compatible with ISS crew)
- Incremental Mapping
- Astrobee “B” and “C” Commissioning
- Demonstration (Sensor surveys, 0g research capabilities, Host payloads)




Handover Success Criteria

Deliverable	Success Criteria	Artifact	Responsibility
Astrobee Hardware	Verification of requirements & KPPs	Successfully executed procedures	I&T
Astrobee Simulation	Validation that sim is accurate to flight performance	Sim vs. Flight analysis report	Ops
Flight Software	Verification of requirements & KPPs	Successfully executed procedures	I&T
Ground Software	Verification of requirements	Successfully executed procedures	I&T
Documentation	Reviewed at final PTR by SPHERES PM	Signature sheet	PM
Astrobee Final Report	Validation of flight performance	Final report	PM



Commissioning Schedule

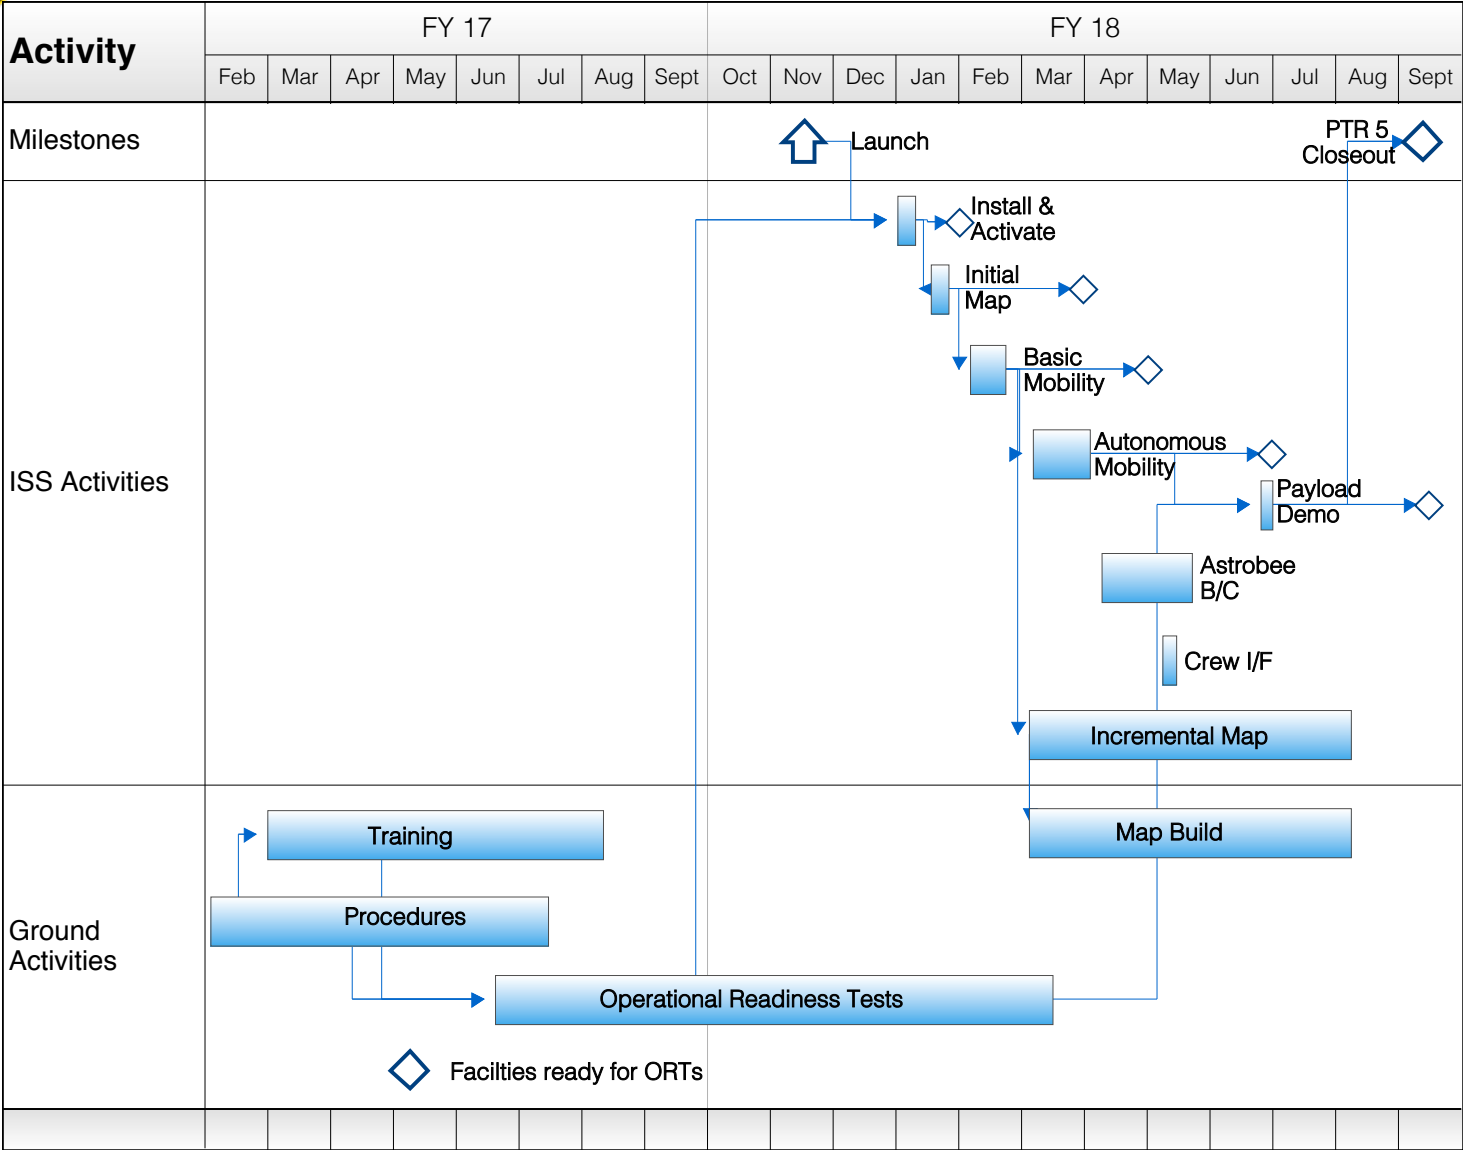



Risks

- Assumes hardware on dock and launches on time
- Crew time required for first several activities
 - Mitigation: significant schedule margin
- REALM required for payload demo (minimum success criteria)
 - Mitigation: SPHERES will develop its own test payload
- Success-based planning (no crew) for advanced mobility checkout and incremental mapping; may need crew to “rescue” us
 - Mitigation: activities will be structured to minimize the risk that crew will be needed



Agenda

Time	Duration	Presenter	Topic
8:30	0:30	Terry, Chris	Welcome/Intro
9:00	1:30	Trey, Team Leads	Design
10:30	0:15		<i>Break</i>
10:45	1:15	Team Leads	Design
12:00	0:45		<i>Lunch</i>
12:45	0:30		<i>Demo</i>
13:15	1:15	Team Leads	Design
14:30	0:15		<i>Break</i>
14:45	0:30	Trey	Systems Engineering
15:15	0:30	Jonathan	Integration & Test
15:45	0:30	Ernie	Safety
16:15	0:15	Chris	Project Management
16:30	0:15	Maria	Operations
16:45	0:15	Chris	Conclusion

Astrobee



Delta PTR 3 Closing



PTR schedule

- Feb 1 – Delta PTR 3
- Feb 1 – Release technical data package for review
- Feb 15 – Comments due
- Mar 1 – Triage comments for impact to design and Cert Unit procurements
- Mar 15 – Disposition all comments, update documents/technical baseline



Forward Work

- Astrobee Design
 - Open work described in Design Overview documents
 - Design mods from Prototype 4D testing (if any)
- SPHERES: Continue technology transition
- REALM: Continue payload integration, API development
- Cert/Flight Unit builds



Success Criteria

Success Criteria	Compliance Approach	Mapped Products
The detailed design is expected to meet the requirements with adequate margins at an acceptable level of risk.	<ul style="list-style-type: none">• Requirements trace to components in the subsystem architectures.• Review completed design.• Technical risks identified.	<ul style="list-style-type: none">• IRG-FF006 requirements• IRG-FF017 Astrobee Design Overview• Astrobee Risk Register
Interface control documents are sufficiently mature to proceed with fabrication, assembly, integration, and test	<ul style="list-style-type: none">• Hardware interfaces in requirements documents & CAD models• Software ICD's documented• Astrobee IRB baselined	<ul style="list-style-type: none">• IRG-FF006 System Requirements• A9SP- and IRG-FFDW-drawings• IRG-FF025 GNC ICD• IRG-FF026 Comm ICD
The element cost and schedule, are credible and within GCD/HET 2 constraints.	<ul style="list-style-type: none">• HET Project Plan updated via GCD CR process.• Cost & schedule risks identified in risk register.	<ul style="list-style-type: none">• HET-2 Project Plan• IRG-FF001 Astrobee PM Plan• Astrobee IMS• Astrobee Risk Register



Success Criteria

Success Criteria	Compliance Approach	Mapped Products
High confidence exists in the product baseline, and adequate documentation exists to allow proceeding with fabrication, assembly, integration, and test.	<ul style="list-style-type: none">• Subsystem requirements trace to components in the subsystem architectures.• Technical risks identified.• Build-to based on procedures and drawings.	<ul style="list-style-type: none">• IRG-FF006 L3 requirements• IRG-FF017 Astrobee Design Overview• Astrobee Risk Register• IRG-FFDW and A9SP
The product V&V requirements and plans are complete.	<ul style="list-style-type: none">• Develop VM and verification description for each req.	<ul style="list-style-type: none">• IRG-FF006 requirements• IRG-FF007 I&T Plan
The testing approach is comprehensive, and the planning for system assembly, integration, test, and launch site and mission operations is sufficient to progress into the next phase.	<ul style="list-style-type: none">• I&T procedures drafted and practiced with Prototype 4.	<ul style="list-style-type: none">• IRG-FFTEST-XXX Integration, Checkout & Test Procedures



Success Criteria

Success Criteria	Compliance Approach	Mapped Products
Adequate technical margins exist.	<ul style="list-style-type: none">Identify technical performance measures that support Astrobee KPPs and key requirements.Margins listed for major milestones.Risk opened for negative margin.	<ul style="list-style-type: none">IRG-FF002-02 Astrobee TPMsAstrobee Risk Register
Risks to mission success are understood and credibly assessed, and plans and resources exist to effectively manage them.	<ul style="list-style-type: none">Risks identified and action plans formulated.Top risks elevated to HET-2 and GCD.	<ul style="list-style-type: none">Astrobee Risk RegisterGCD Quarterly Reports



Success Criteria

Success Criteria	Compliance Approach	Mapped Products
SMA has been adequately addressed in system and operational designs, and is at the appropriate maturity level for this phase of the life cycle.	<ul style="list-style-type: none">• Compliance with safety requirements and PSRP processes.• SMA Plan based on customer agreement with Code QS.	<ul style="list-style-type: none">• IRG-FF018 Astrobee Safety Data Package• Astrobee Standard & Unique Hazards• IRG-FF003 SMA Plan
The operational concept has matured, is at the appropriate level of detail, and has been considered in test planning.	<ul style="list-style-type: none">• Detailed conops and functional flows developed to resolve system & subsystem requirements and interactions• Develop Ops Con with POIC	<ul style="list-style-type: none">• IRG-FF009 Astrobee ConOps• IRG-FFB-XXX Functional Blocks



Success Criteria

Success Criteria	Compliance Approach	Mapped Products
Engineering prototypes have been developed and tested per plan.	<ul style="list-style-type: none">• Iterative design, development and testing on multiple prototypes.	<ul style="list-style-type: none">• IRG-FF001 Astrobee PM Plan• Astrobee IMS
The element has demonstrated an appropriate implementation of ISS, Ames and NASA requirements, standards, processes, and procedures.	<ul style="list-style-type: none">• Compliance with ISS/JSC/MSFC processes for ISS payloads.• Compliance with ISS launch and on-orbit requirements for ISS payloads.• PM and SE practices leveraged from NPR/APR/Handbooks.	<ul style="list-style-type: none">• Astrobee Payload Integration Agreement.• Astrobee IRB• IRGFFRP-003 PTR3 data package, which includes all Astrobee planning documents.
Open items/issues are clearly identified with acceptable plans and schedule for their disposition.	<ul style="list-style-type: none">• Open design identified.• Forward work captured in these charts.• CR comments in consolidated form.	<ul style="list-style-type: none">• JIRA “Astrobee-TBD” filter• IRGFFRP-003D PTR3D data package• CR007



Closing Remarks